


PRODUCTS

Chilisin provides inductor turnkey solutions for EMI, power and RF and a global technical team to support its customers. Chilisin has become one of the few inductor suppliers capable of providing a complete "one-stop shopping" experience.

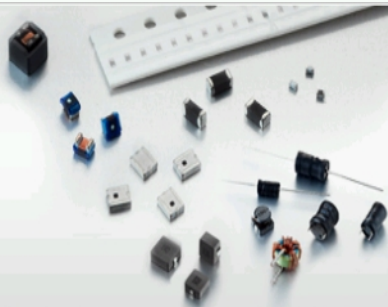

- Power Inductor
- Chip Inductor
- Bead
- Common Mode Choke

Product Search

SCDS6D28

Home > Products > Power Inductor > SCDS6D28



Part Number : SCDS6D28T-6R0?-S-N

Structure	Closed Magnetic Circuit Type
Inductance(?H)	6
Tolerance(±%)	30
Test Frequency	10 kHz, 1 V
RDC(?)Max	0.035
Rated Current(A)	2.25
Operating Temperature	-3 0 °C~ 1 0 0 °C (Including self - temperature rise)
L(mm)	6.7±0.3
W(mm)	6.7±0.3
T(mm)	3.0Max.

1.Rate current: The rate current indicates the current when the inductance decreases to 65% over of it's nominal value or D.C.current when the temperature rising $\Delta T=40^{\circ}\text{C}$ lower whichever is lower

2.RDC test method: place testing device to the 2 solder ends of wounding and test the value.

P/N	SCDS6D28T-6R0T-S-N
Part Numbering	
Dimensions	
Packing	
Recommended Pattern	
Electrical Characteristics Curve	

Back