

(1.27 mm) .050"

SEAFP SERIES

PRESS-FIT OPEN-PIN-FIELD ARRAY

SPECIFICATIONS




For complete specifications and recommended PCB layouts see www.samtec.com?SEAFP

- Insulator Material:**
Natural High Temperature Nylon
- Contact Material:**
BeCu Alloy
- Plating:**
Au or Sn over 50 μ" (1.27 μm) Ni
- Operating Temp Range:**
-55 °C to +125 °C
- Current Rating (SEAFP/SEAM):**
1.9 A per pin (6 adjacent pins powered)
- Working Voltage:**
250 VAC
- RoHS Compliant:**
Yes

- Board Mates:**
SEAM, SEAM-RA, SEAMP
- Cable Mates:**
SEAC

RECOGNITIONS

For complete scope of recognitions see www.samtec.com/quality

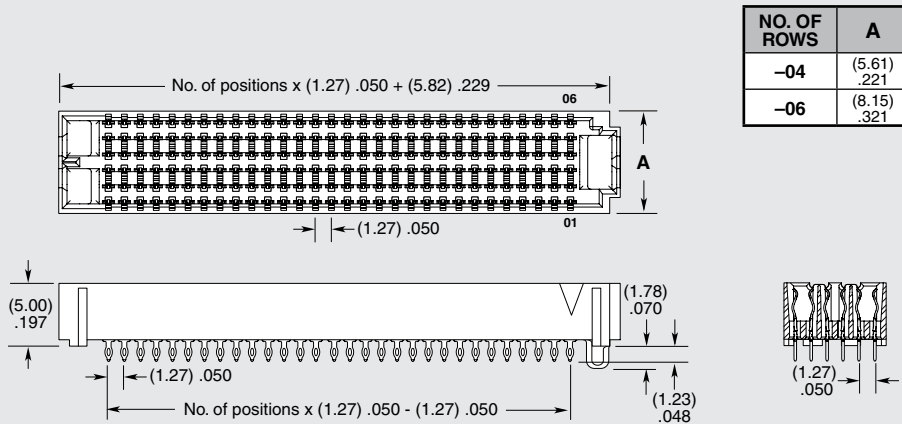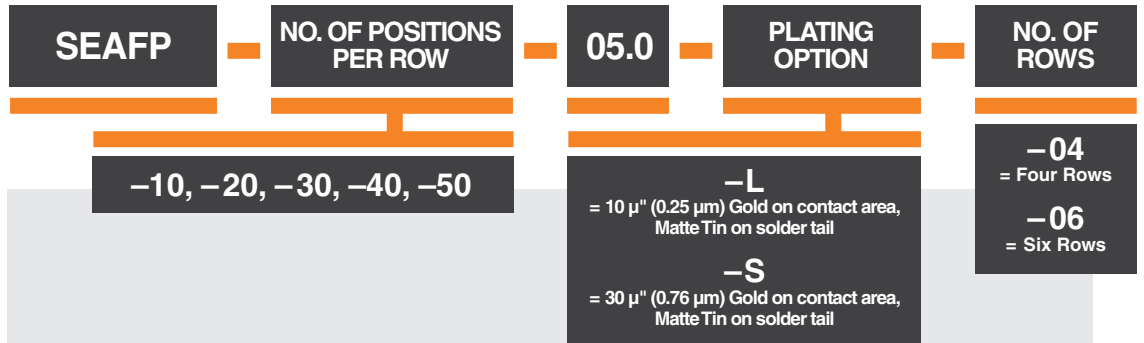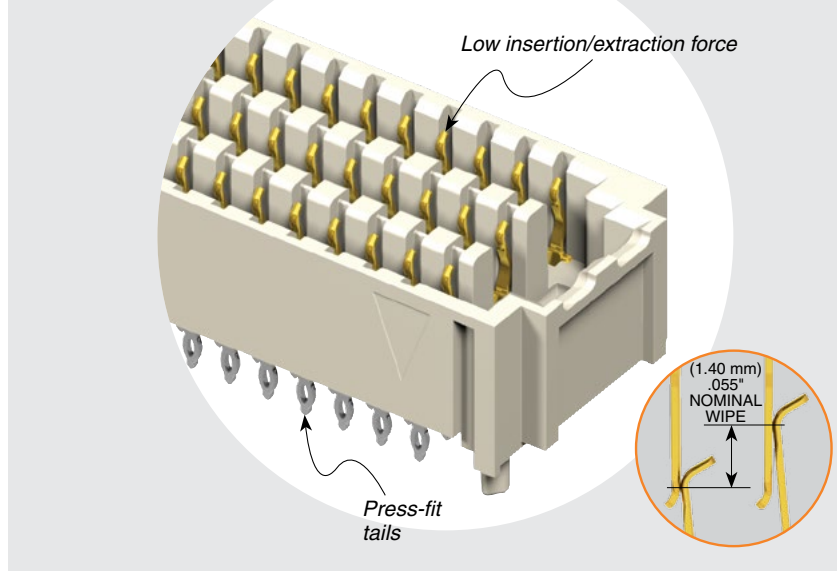

Notes:
Patented

Compliant pin fixture
CAT-SEAFP-XX-XX.

Some sizes, styles and options are non-standard, non-returnable.

Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM

All parts within this catalog are built to Samtec's specifications. Customer specific requirements must be approved by Samtec and identified in a Samtec customer-specific drawing to apply.