


LTR	REVISION	DATE	APPD
A	101216-PL01: ADDED P/N (0PB)	10-12-16	GP



NOTES:

1. ALL DIMENSIONS ARE IN INCHES [MILLIMETERS].
2. BASE MATERIAL: BRASS, NICKEL PLATED
3. OPERATING TEMPERATURE: ~-30°C to ~+50°C

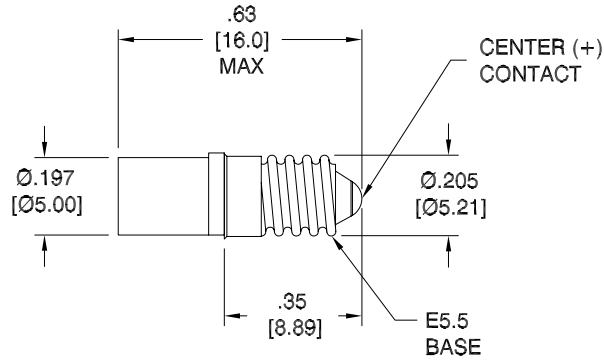

REVISION NOTIFICATION	
<input type="checkbox"/> DLC	
<input type="checkbox"/> UL/ETL	
<input type="checkbox"/> MADE IN USA	
<input type="checkbox"/> CUSTOMER _____	
<input type="checkbox"/> OTHER	
REDLINE CHECKLIST	
<input type="checkbox"/> REDLINE(YES)	
<input type="checkbox"/> DATE: _____	
<input type="checkbox"/> INITIATED BY: _____	
<input type="checkbox"/> ECR REQUIRED YES <input type="checkbox"/> NO <input type="checkbox"/>	
<input type="checkbox"/> WORK ORDER# _____	

ELECTRICAL-OPTICAL CHARACTERISTICS (Ta = 25°C)

SF200-0AG-028P	AQUA GREEN	24/28Vdc(@28Vdc)	0.42 W	0.013 A	0.400cd	520	85°
SF200-0CW-028P	COOL WHITE	24/28Vdc(@28Vdc)	0.42 W	0.013 A	0.160cd	8000K	95°
SF200-0PB-028P	SUPER BLUE	24/28Vdc(@28Vdc)	0.42 W	0.013 A	-	465	85°
SF200-0UR-028P	ULTRA RED	24/28Vdc(@28Vdc)	0.42 W	0.018 A	0.085cd	652	80°
SF200-0UY-028P	SUPER YELLOW	24/28Vdc(@28Vdc)	0.42 W	0.018 A	0.075cd	595	90°
LEDTRONICS PART NO.	COLOR EMITTED	INPUT VOLTAGE, V	POWER (W)	CURRENT (A)	MAXIMUM CANDELA	λ_P nm COLOR TEMP. (K)	VIEWING ANGLE (FULL BEAM WIDTH @ 50% INTENSITY)

 23105 KASHIWA COURT TORRANCE, CA 90505	-PROPRIETARY- This document contains Proprietary information of LEDTRONICS, INC. It may not be copied, used or disclosed for any purpose without the prior express written consent of LEDTRONICS, INC.		TITLE SF200-0XX-028P				
	.XXX ± .010 TOLERANCE PER ANSI-Y14.5 (UNLESS OTHERWISE STATED) .XX ± .025 ANGLES ± 0°,30' FRACT. ± 1/32		DWG NO SF200-28V-P	SCALE 2:1	SHEET 1 OF 1	DATE 09-03-08	
	CODE IDENT NO. 8Z410	DWG BY GP 09-03-08	CHK BY PL 10-12-16	QA	MFG	R&D	