

SFPE SERIES

SFP+ PASSIVE JUMPER CABLE

SPECIFICATIONS

For complete specifications see www.samtec.com?SFPE



Impedance:
100 Ω
Signal Routing:
Differential

Mates with:
MECT, SFPC

1 channel (2 pair)
transmitting up to 10 Gbps

Compliant
to SFP+


APPLICATION

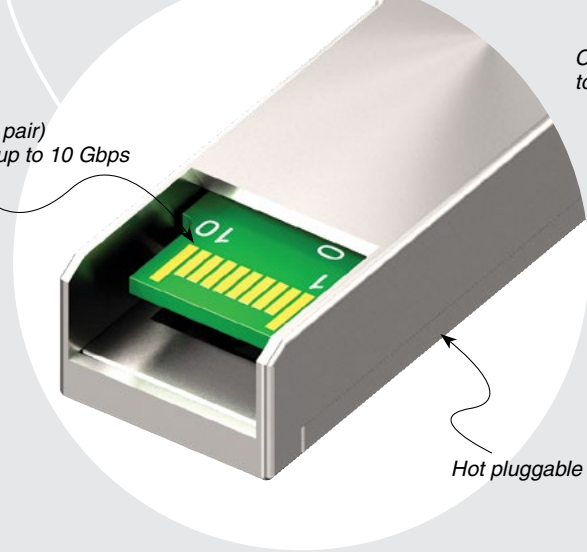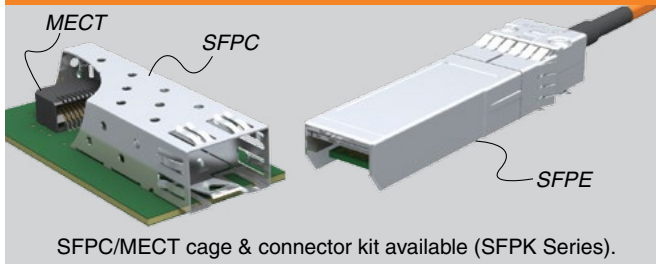

ALSO AVAILABLE
(MOQ Required)

- Other lengths available. Cable assemblies longer than 3 m are not supported with S.I. test data. Contact Samtec.

SFPE	NO. OF PAIRS	CABLE LENGTH	EQUALIZATION	WIRE GAUGE
-010	= 2 Pairs	-XXXX = Length in millimeters -1000, -2000, -3000 (Standard lengths)	-NE = Non Equalized	-32 = 32 AWG

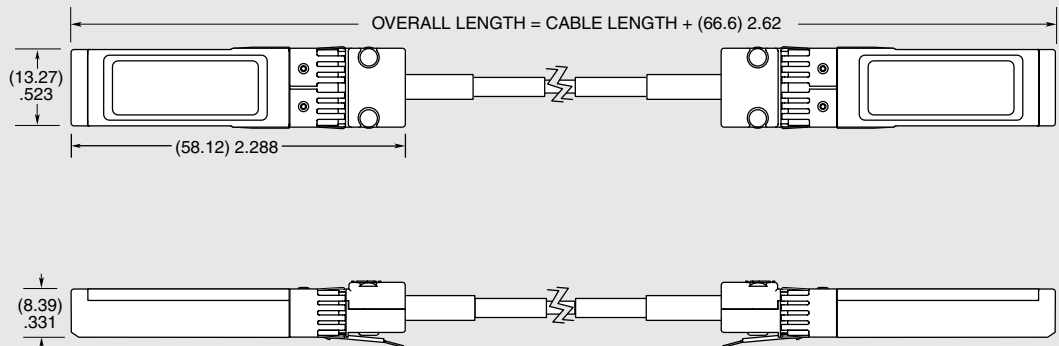

Note: Some sizes, styles and options are non-standard, non-returnable.

Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM

All parts within this catalog are built to Samtec's specifications. Customer specific requirements must be approved by Samtec and identified in a Samtec customer-specific drawing to apply.