



REV	DATE	ECO#

DRAWING NOT TO SCALE  
ALL DIMENSION IN INCHES

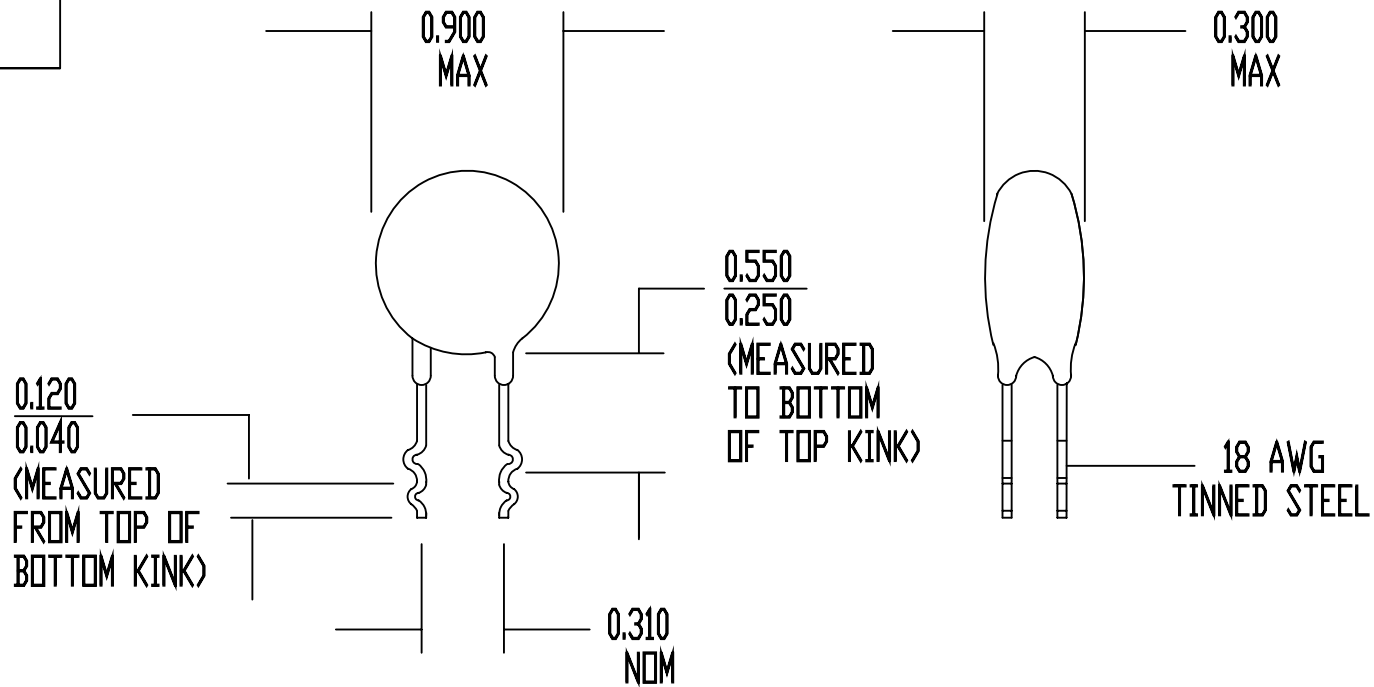

**SPECIFICATIONS:**

RESISTANCE AT 25 DEG C = 1 OHM +/- 25%  
 MAX CONTINUOUS CURRENT (I<sub>max</sub>) = 16 AMPS  
 RESISTANCE AT I<sub>max</sub> = 0.02 OHMS NOMINAL  
 RESISTANCE AT 150 DEG C = 0.045 OHMS NOMINAL  
 BETA = 3000 DEG K NOMINAL  
 DISSIPATION CONSTANT = 20 mW/DEG C NOMINAL  
 MAX VOLTAGE RATING = 120 VAC (RMS)  
 MAX SURGE RATING = 48 JOULES  
 ENCAPSULATION = SILICONE RESIN  
 MARKING = OPTIONAL  
 LEADS = RODAN P/N STL-209-60 OR STL-209-49

DRAWN BY D. NGUYEN		 <b>Circuit Protection Thermistors</b>
DATE 05/22/92	ORIG. B. WILSON	
REV N/C	APP	<b>SURGE-GARD</b> <b>INRUSH CURRENT LIMITER</b>
SHEET 1 OF 1		SG348