



REV	DATE	ECD#
A	12/14/92	1232

DRAWING NOT TO SCALE
ALL DIMENSIONS IN INCHES

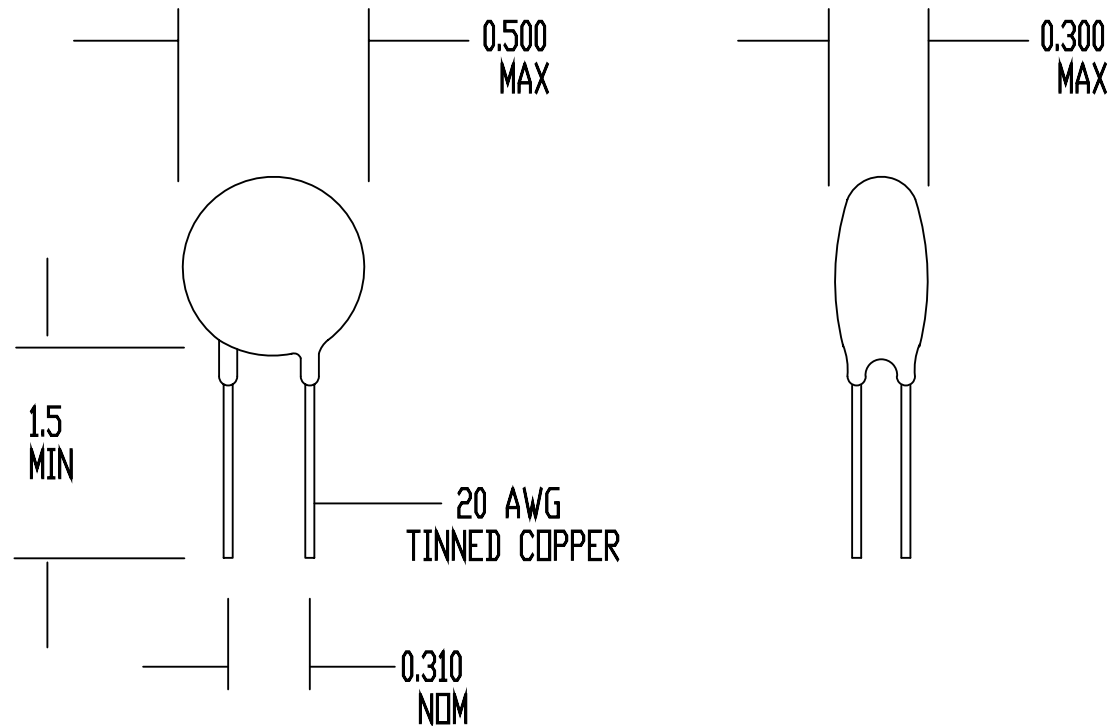

SPECIFICATIONS:

RESISTANCE AT 25 DEG C = 25 OHMS +/- 25%
 MAXIMUM CONTINUOUS CURRENT (I_{max}) = 2.4 AMPS
 RESISTANCE AT I_{max} = 0.4 OHMS NOMINAL
 MAXIMUM VOLTAGE RATING = 265 VAC (RMS)
 MAXIMUM SURGE RATING = 30 JOULES
 ENCAPSULATION = SILICONE RESIN
 MARKING = OPTIONAL

DRAWN BY D. NGUYEN		 AMETHERM <i>Circuit Protection Thermistors</i>
DATE 01/11/90	ORIG. F. TISED	
REV A	APP	SURGE-GARD INRUSH CURRENT LIMITER
SHEET 1 OF 1		SG412