



REV	DATE	ECO#
A	12/14/92	1232

DRAWING NOT TO SCALE
ALL DIMENSIONS IN INCHES

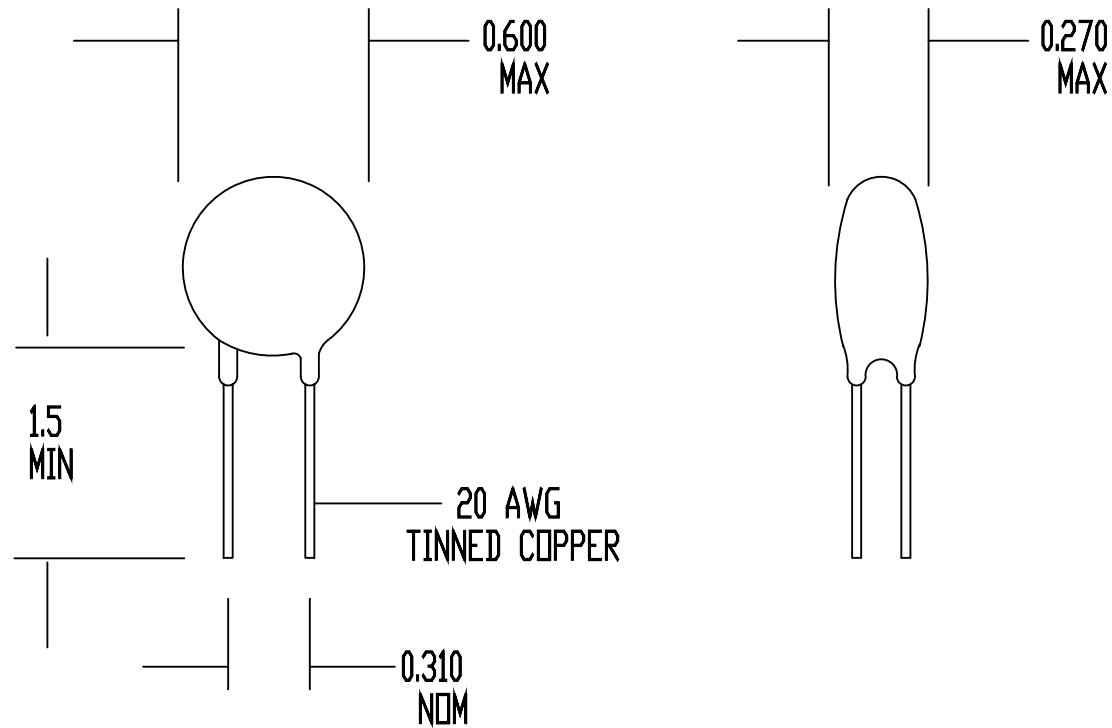

SPECIFICATIONS:
 RESISTANCE AT 25 DEG C = 6 OHMS +/- 15%
 MAXIMUM CONTINUOUS CURRENT (I_{max}) = 5 AMPS
 RESISTANCE AT I_{max} = 0.15 OHMS NOMINAL
 MAXIMUM VOLTAGE RATING = 265 VAC (RMS)
 MAXIMUM SURGE RATING = 40 JOULES
 ENCAPSULATION = SILICONE RESIN
 MARKING = OPTIONAL

DRAWN BY D. NGUYEN		 Circuit Protection Thermistors
DATE 08/28/90	ORIG. F. TISED	
REV A	APP	SURGE-GARD INRUSH CURRENT LIMITER
SHEET 1 OF 1		SG418