



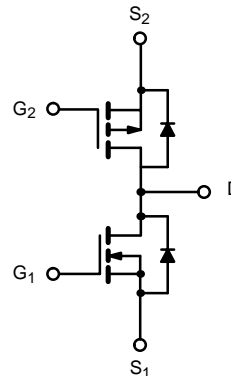

Complementary MOSFET Half-Bridge (N- and P-Channel)

PRODUCT SUMMARY			
	V _{DS} (V)	r _{DS(on)} (Ω)	I _D (A)
N-Channel	30	0.018 @ V _{GS} = 10 V	±9
		0.027 @ V _{GS} = 4.5 V	±7.4
P-Channel	-8	0.042 @ V _{GS} = -4.5 V	±6.2
		0.060 @ V _{GS} = -2.5 V	±5.2

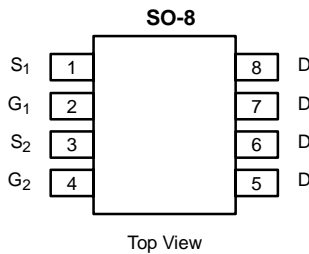

ABSOLUTE MAXIMUM RATINGS (T _A = 25 °C UNLESS OTHERWISE NOTED)				
Parameter	Symbol	N-Channel	P-Channel	Unit
Drain-Source Voltage	V _{DS}	30	-8	V
Gate-Source Voltage	V _{GS}	±20	±8	
Continuous Drain Current (T _J = 150 °C) ^{a, b}	I _D	T _A = 25 °C	±9	A
		T _A = 70 °C	±7.4	
Pulsed Drain Current	I _{DM}	±30	±20	
Continuous Source Current (Diode Conduction) ^{a, b}	I _S	1.7	-1.7	
Maximum Power Dissipation ^{a, b}	P _D	T _A = 25 °C	2.5	W
		T _A = 70 °C	1.6	
Operating Junction and Storage Temperature Range	T _J , T _{stg}	-55 to 150		°C

THERMAL RESISTANCE RATINGS							
Parameter	Symbol	N-Channel		P-Channel		Unit	
		Typ	Max	Typ	Max		
Maximum Junction-to-Ambient ^a	R _{thJA}	t ≤ 10 sec	38	50	40	50	°C/W
		Steady-State	73	95	73	95	
Maximum Junction-to-Foot	R _{thJC}	Steady-State	17	22	20	26	

Notes

- a. Surface Mounted on FR4 Board.
- b. t ≤ 10 sec

SPECIFICATIONS (T _J = 25 °C UNLESS OTHERWISE NOTED)							
Parameter	Symbol	Test Condition	Min	Typ ^a	Max	Unit	
Static							
Gate Threshold Voltage	V _{GS(th)}	V _{DS} = V _{GS} , I _D = 250 μA	N-Ch	0.8			V
		V _{DS} = V _{GS} , I _D = -250 μA	P-Ch	-0.45			
Gate-Body Leakage	I _{GSS}	V _{DS} = 0 V, V _{GS} = ±20 V	N-Ch			±100	nA
		V _{DS} = 0 V, V _{GS} = ±8 V	P-Ch			±100	
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} = 24 V, V _{GS} = 0 V	N-Ch			1	μA
		V _{DS} = -6.4 V, V _{GS} = 0 V	P-Ch			-1	
		V _{DS} = 24 V, V _{GS} = 0 V, T _J = 55 °C	N-Ch			5	
		V _{DS} = -6.4 V, V _{GS} = 0 V, T _J = 55 °C	P-Ch			-5	
On-State Drain Current ^b	I _{D(on)}	V _{DS} = 5 V, V _{GS} = 10 V	N-Ch	30			A
		V _{DS} = -5 V, V _{GS} = -4.5 V	P-Ch	-20			
Drain-Source On-State Resistance ^b	r _{DS(on)}	V _{GS} = 10 V, I _D = 9 A	N-Ch		0.015	0.018	Ω
		V _{GS} = -4.5 V, I _D = -6.2 A	P-Ch		0.034	0.042	
		V _{GS} = 4.5 V, I _D = 7.4 A	N-Ch		0.022	0.027	
		V _{GS} = -2.5 V, I _D = -5.2 A	P-Ch		0.048	0.060	
Forward Transconductance ^b	g _{fs}	V _{DS} = 15 V, I _D = 9 A	N-Ch		20		S
		V _{DS} = -15 V, I _D = -6.2 A	P-Ch		14		
Diode Forward Voltage ^b	V _{SD}	I _S = 1.7 A, V _{GS} = 0 V	N-Ch		0.71	1.1	V
		I _S = -1.7 A, V _{GS} = 0 V	P-Ch		-0.70	-1.1	
Dynamic^a							
Total Gate Charge	Q _g	N-Channel V _{DS} = 15 V, V _{GS} = 5 V, I _D = 9 A P-Channel V _{DS} = -4 V, V _{GS} = -5 V, I _D = -6.2 A	N-Ch		4.5	20	nC
Gate-Source Charge	Q _{gs}		N-Ch		3.3		
			P-Ch		3.0		
Gate-Drain Charge	Q _{gd}		N-Ch		6.6		
		P-Ch		2.0			
Turn-On Delay Time	t _{d(on)}	N-Channel V _{DD} = 15 V, R _L = 15 Ω I _D ≅ 1 A, V _{GEN} = 10 V, R _G = 6 Ω P-Channel V _{DD} = -4 V, R _L = 4 Ω I _D ≅ -1 A, V _{GEN} = -4.5 V, R _G = 6 Ω	N-Ch		13	20	ns
			P-Ch		20	40	
Rise Time	t _r		N-Ch		9	18	
			P-Ch		50	100	
Turn-Off Delay Time	t _{d(off)}		N-Ch		35	50	
			P-Ch		110	220	
Fall Time	t _f		N-Ch		17	30	
			P-Ch		60	120	
Source-Drain Reverse Recovery Time	t _{rr}	I _F = 1.7 A, di/dt = 100 A/μs	N-Ch		35	70	
			P-Ch		60	100	

Notes


- a. Guaranteed by design, not subject to production testing.
 b. Pulse test; pulse width ≤ 300 μs, duty cycle ≤ 2%.




TYPICAL CHARACTERISTICS (25°C UNLESS NOTED)

NCHANNEL


Output Characteristics

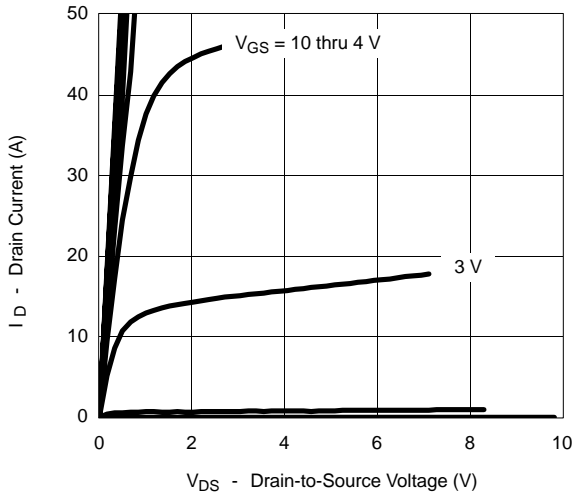


Transfer Characteristics

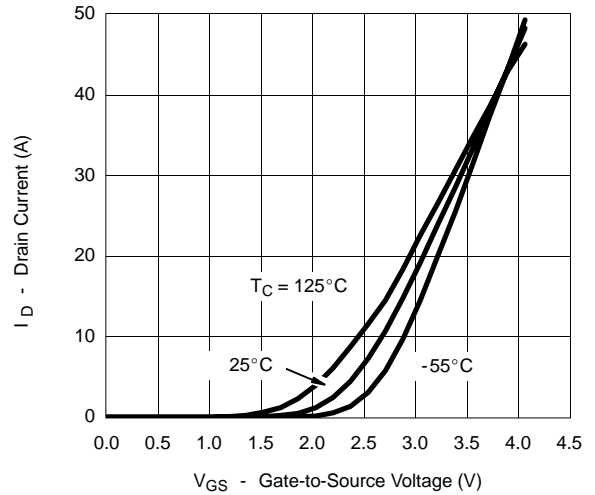


On-Resistance vs. Drain Current

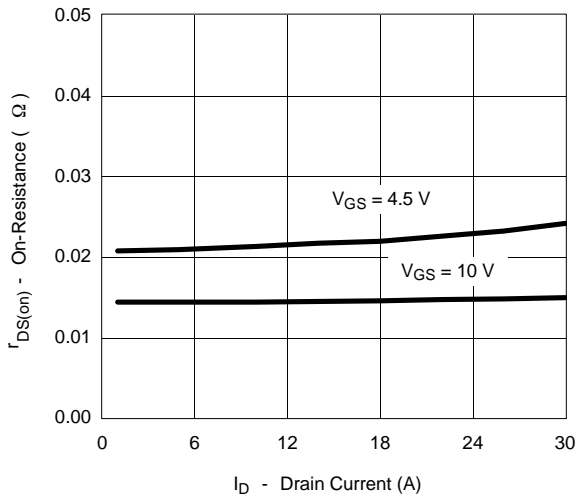


Capacitance

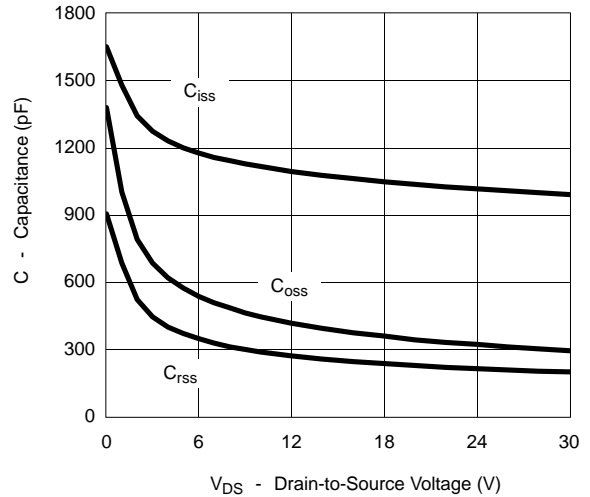

Gate Charge





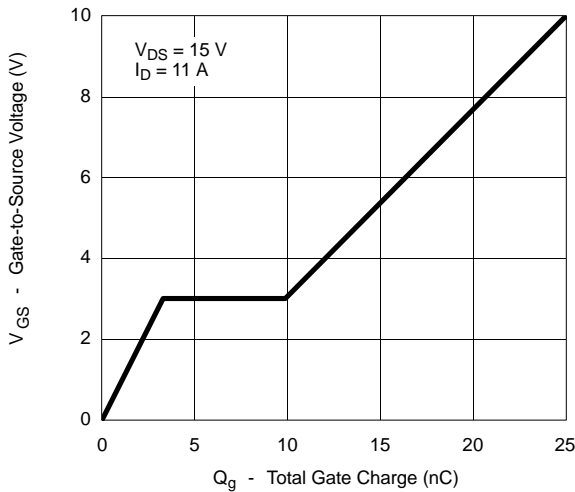


On-Resistance vs. Junction Temperature

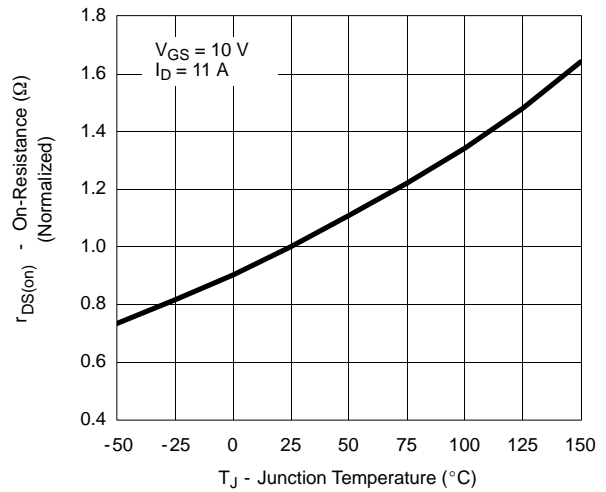


TYPICAL CHARACTERISTICS (25°C UNLESS NOTED)

NCHANNEL

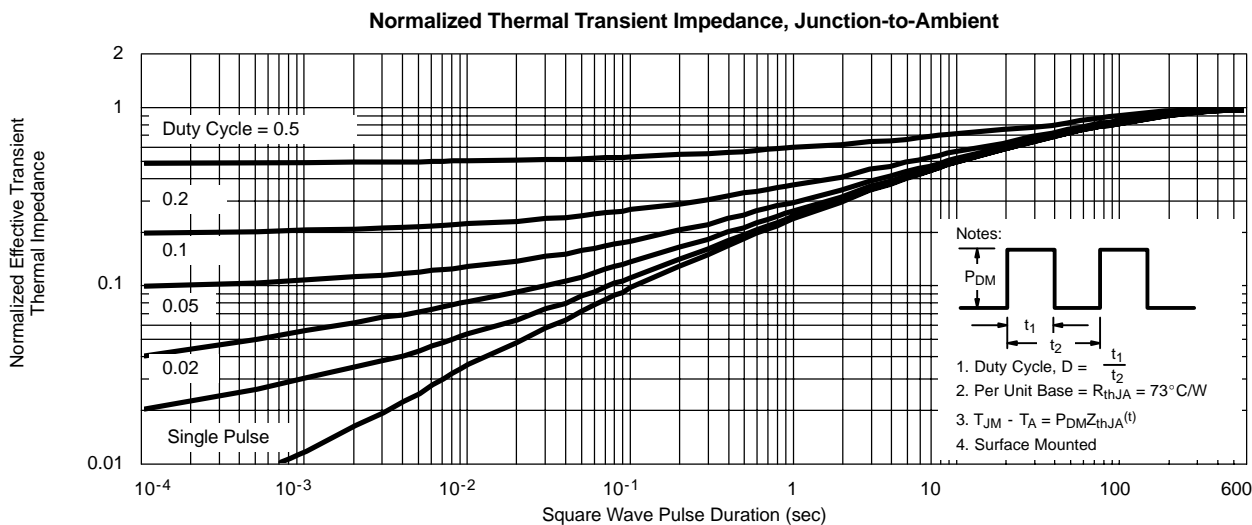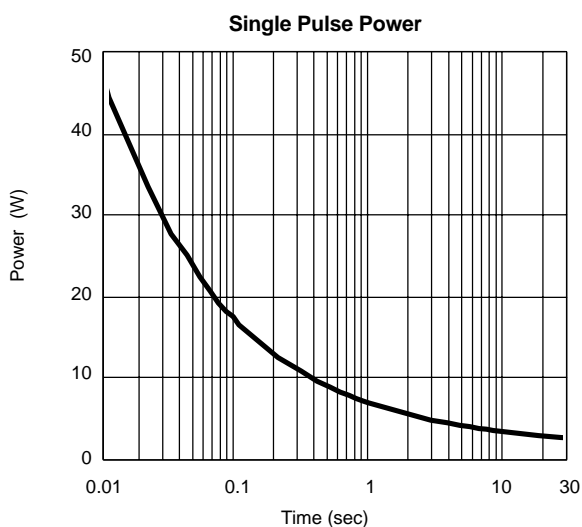
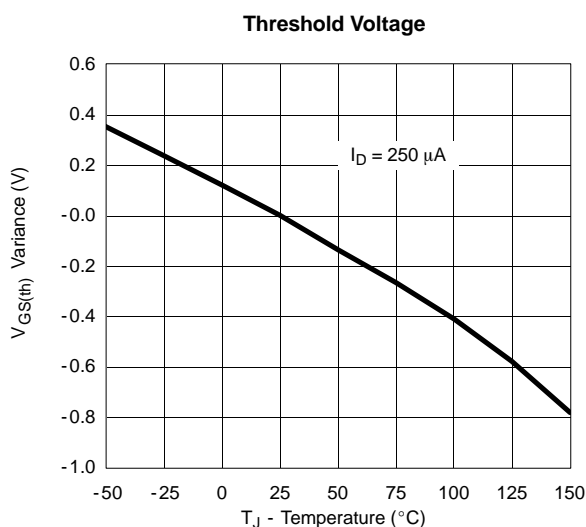
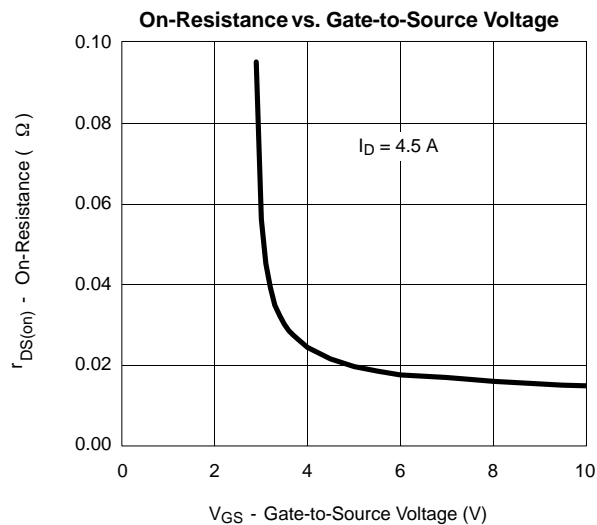
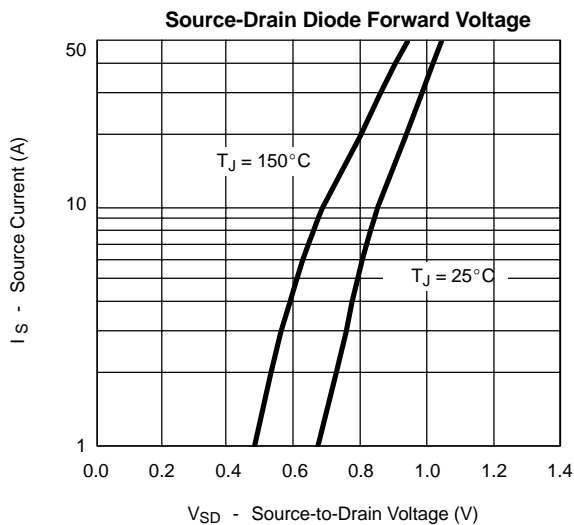




TYPICAL CHARACTERISTICS (25°C UNLESS NOTED) NCHANNEL

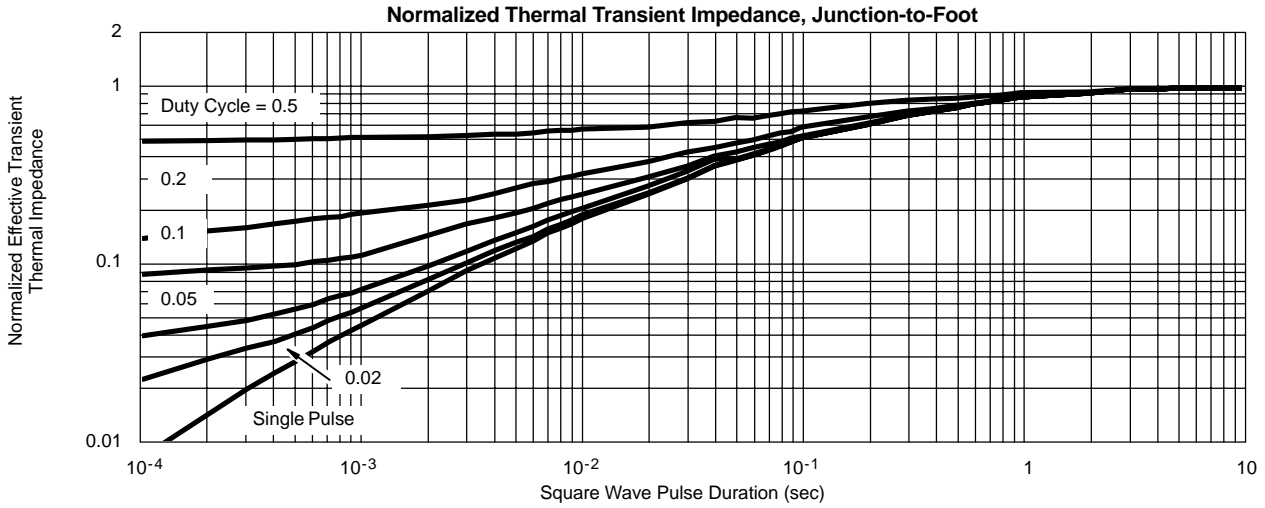







TYPICAL CHARACTERISTICS (25°C UNLESS NOTED) PCHANNEL

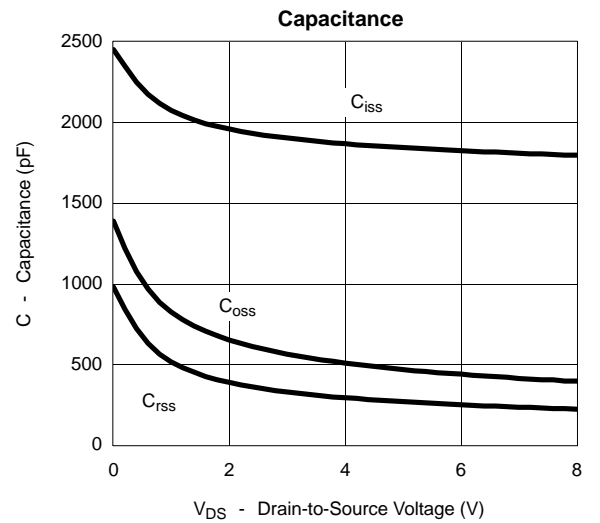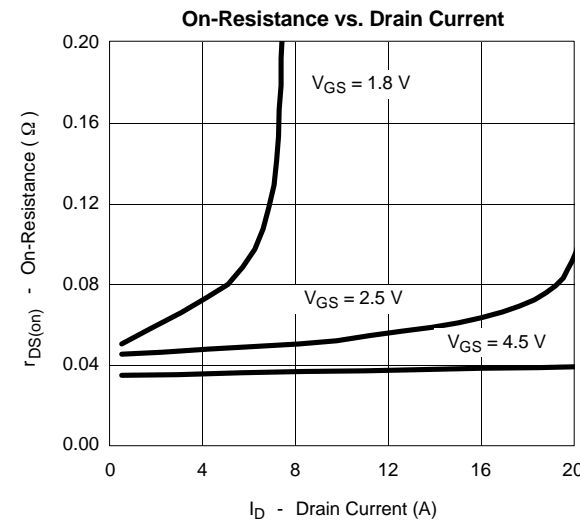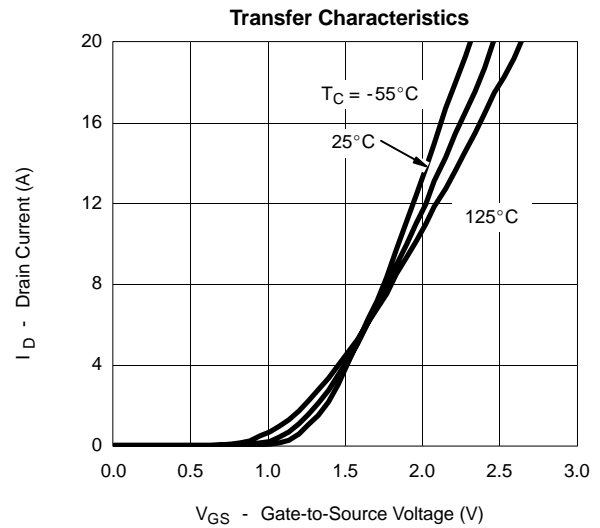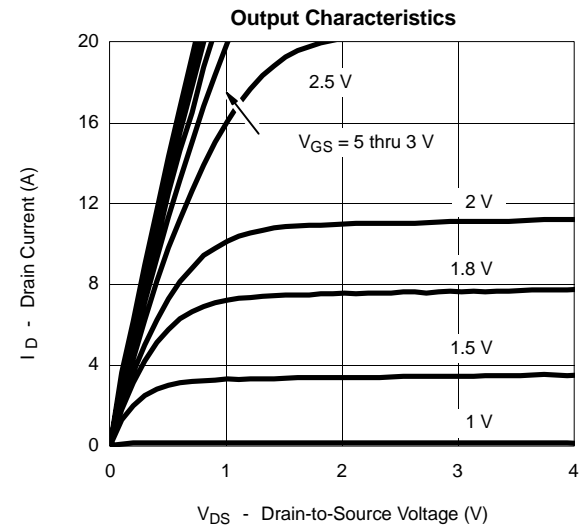





TYPICAL CHARACTERISTICS (25°C UNLESS NOTED)

PCHANNEL

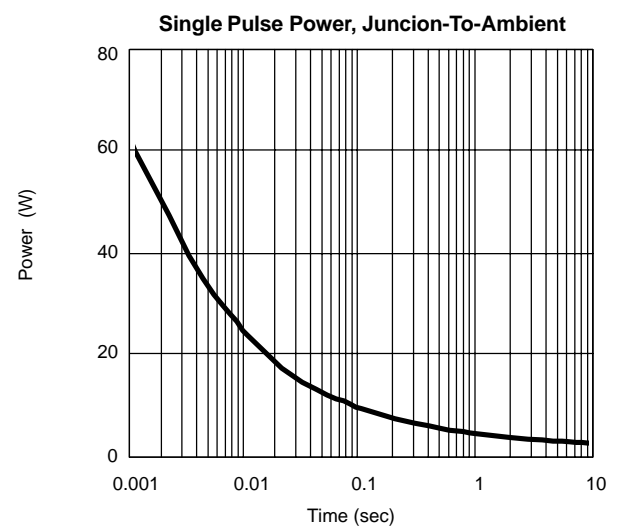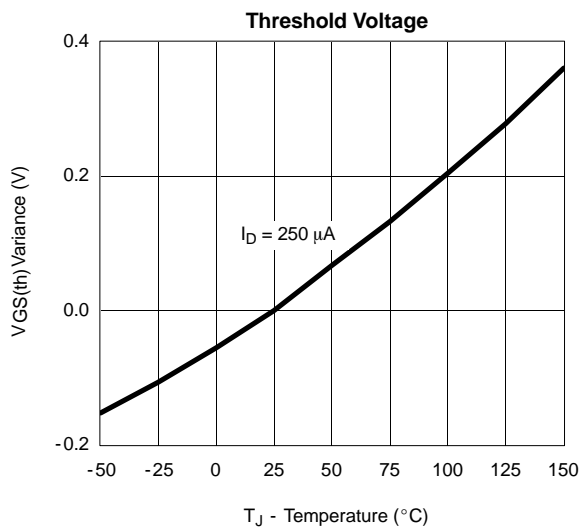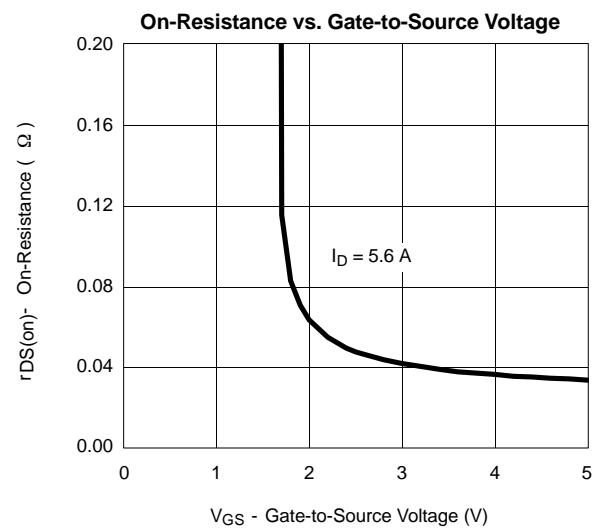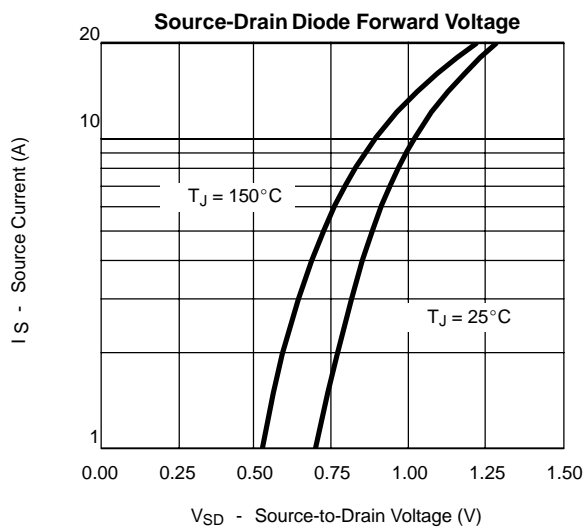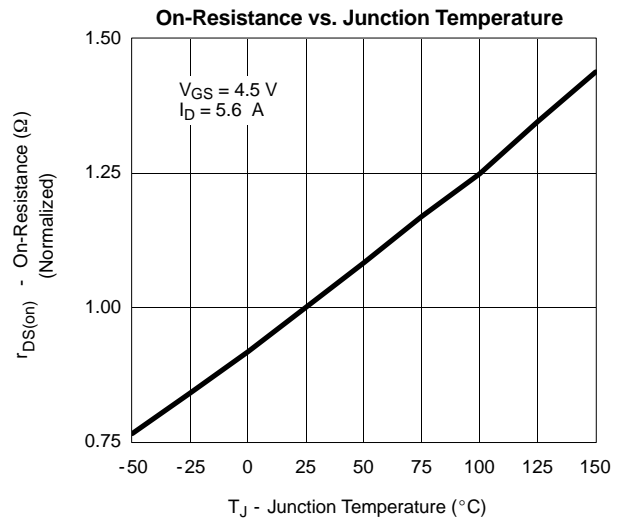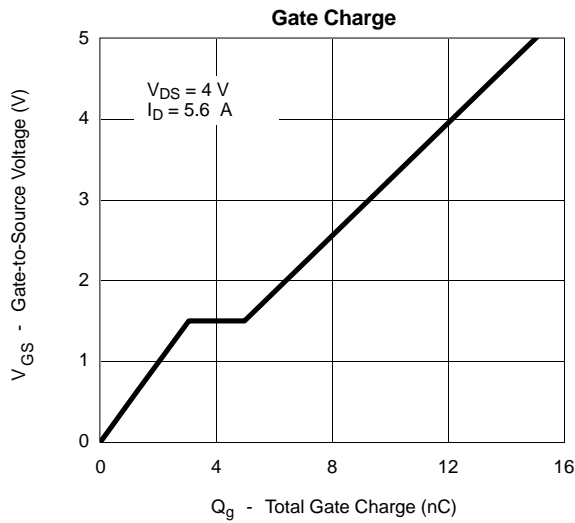



TYPICAL CHARACTERISTICS (25°C UNLESS NOTED) PCHANNEL

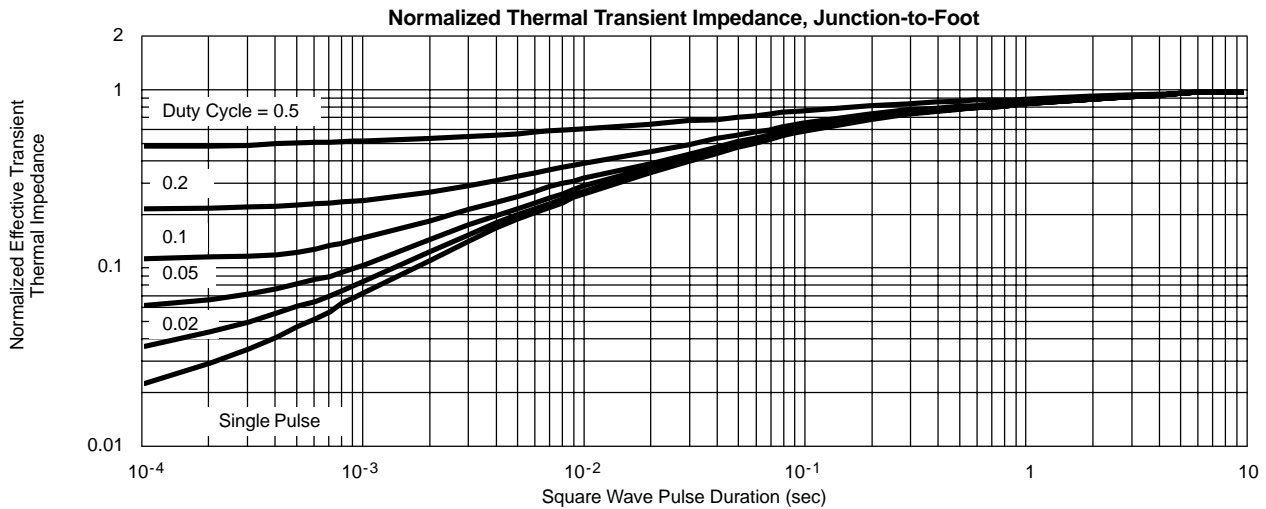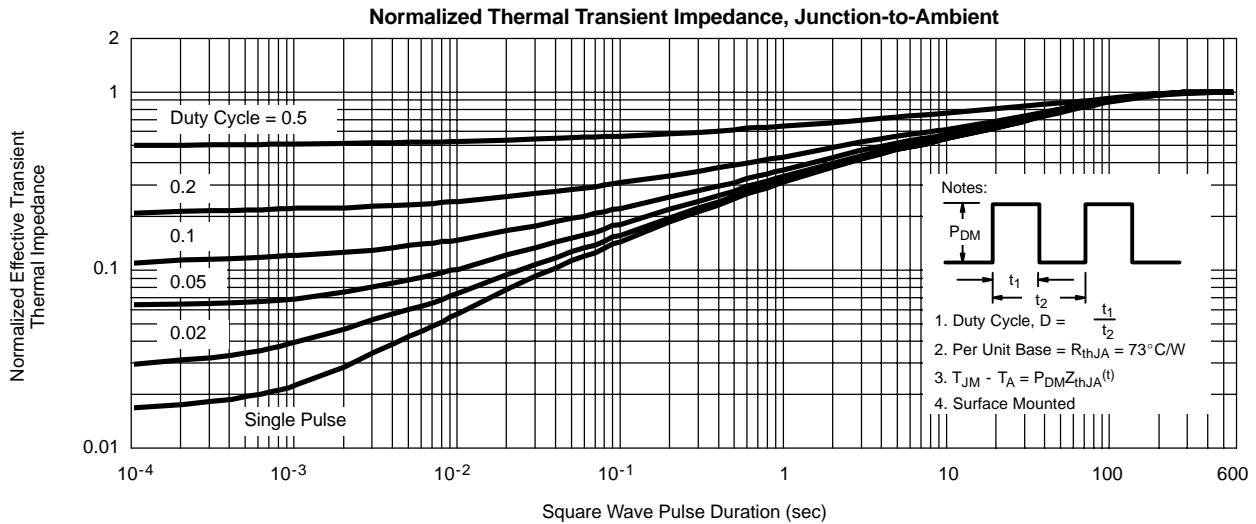



Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.