


LTR	REVISION	DATE	APPD
A	030519-HF01: ADDED P/N: SLF464-OUY-120A	03-05-19	HF

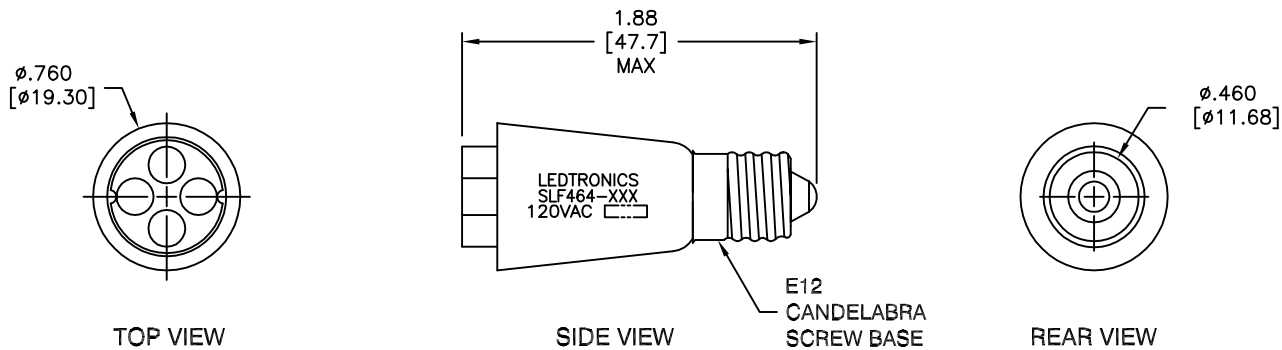

**NOTES:**

1. ALL DIMENSIONS ARE IN INCHES [MILLIMETERS].
2. SLEEVE MATERIAL: RYNITE FR530
3. BASE MATERIAL: BRASS, NICKEL PLATED BRASS

REVISION NOTIFICATION	
<input type="checkbox"/>	DLC
<input type="checkbox"/>	UL/ETL
<input type="checkbox"/>	MADE IN USA
<input type="checkbox"/>	CUSTOMER _____
<input type="checkbox"/>	OTHER
REDLINE CHECKLIST	
<input type="checkbox"/>	REDLINE(YES)
<input type="checkbox"/>	DATE: _____
<input type="checkbox"/>	INITIATED BY: _____
<input type="checkbox"/>	ECR REQUIRED YES <input type="checkbox"/> NO <input type="checkbox"/>
<input type="checkbox"/>	WORK ORDER# _____

**ELECTRICAL-OPTICAL CHARACTERISTICS (Ta = 25°C)**

SLF464-OAG-120A	AQUA GREEN	120Vac	0.007 A	0.54 W	1.100 cd	-	519	80°	AC VOLTAGE
SLF464-OCW-120A	COOL WHITE	120Vac	0.007 A	0.57 W	0.424 cd	68-70	8000K	90°	AC VOLTAGE
SLF464-OUG-120A	LIME GREEN	120Vac	0.008 A	0.67 W	0.116 cd	-	573	75°	AC VOLTAGE
SLF464-OUR-120A	ULTRA RED	120Vac	0.008 A	0.58 W	0.200 cd	-	654	95°	AC VOLTAGE
SLF464-OUY-120A	SUPER YELLOW	120Vac	0.008 A	-	-	-	596	76°	AC VOLTAGE
SLF464-XIW-120A	WARM WHITE	120Vac	0.008 A	0.92 W	1.760 cd	-	3000K	105°	AC VOLTAGE
LEDTRONICS PART NO.	COLOR EMITTED	INPUT VOLTAGE, V (typ.)	CURRENT (A)	POWER (W)	MAXIMUM CANDELA	CRI	$\lambda$ P nm	VIEWING ANGLE (FULL BEAM WIDTH @ 50% INTENSITY)	CENTER CONTACT POLARITY
							COLOR TEMP. (K)		

<p>LEDTRONICS, INC. 23105 KASHIWA COURT TORRANCE, CA 90505</p>	<p><b>-PROPRIETARY-</b> This document contains Proprietary Information of LEDTRONICS, INC. It may not be copied, used or disclosed for any purpose without the prior express written consent of LEDTRONICS, INC.</p>		<p><b>TITLE</b> SLF464-XXX-120A</p>							
	<p>DWG NO</p> <p>SLF464-120V-AC</p>	<p>SCALE</p> <p>1:1</p>	<p>SHEET</p> <p>1 OF 1</p>	<p>DATE</p> <p>12-02-09</p>	<p>CODE IDENT NO.</p> <p>8Z410</p>	<p>DWG BY GP</p> <p>12-02-09</p>	<p>CHK BY</p>	<p>QA SB</p> <p>09-11-19</p>	<p>MFG LD</p> <p>09-11-19</p>	<p>R&amp;D UF</p> <p>09-11-19</p>
	<p>.XXX ± .010 TOLERANCE PER ANSI-Y14.5 .XX ± .025 (UNLESS OTHERWISE STATED) ANGLES ± 0°,30' FRACT. ± 1/32</p>									