
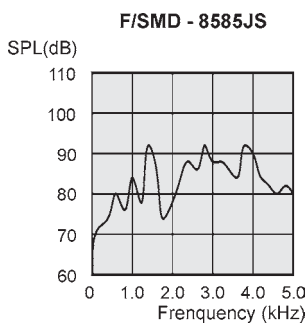
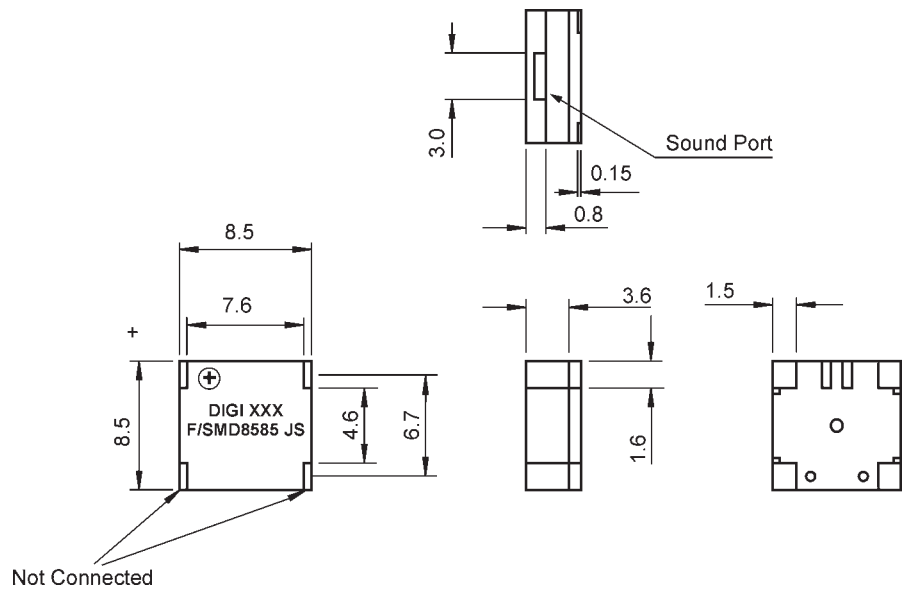


SMT - Buzzer

F/SMD 8585 JS

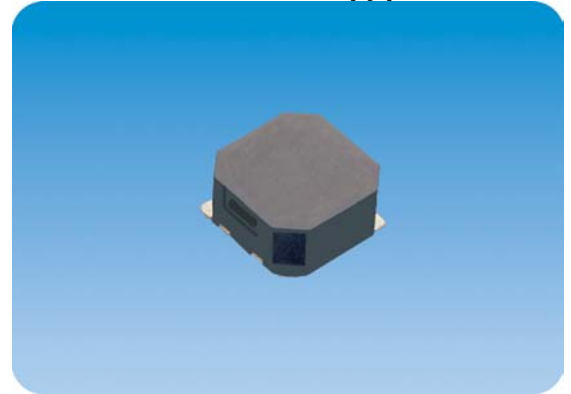

Typischer Frequenzgang
Typical frequency response

Technische Daten / technical data:	F/SMD 8585 JS
Betriebsspannungsbereich / operating voltage range (V)	2...5
Nennspannung / rated voltage (V)	3
Nennstrom / rated current (mA)	≤ 80
Lautstärke / sound pressure level (SPL)* (dB/10 cm)	≥ 85
Wicklungswiderstand / coil resistance (Ω)	18 ± 3
Impedanz / impedance (Ω)	19
Resonanzfrequenz / resonant frequency (Hz)	2730
Betriebstemperatur / operating temperature (°C)	-40...+85
Gewicht / weight (g)	1 g

* Bei angelegter Nennspannung (2730 Hz, 3.0 V, ½ Tastverhältnis, Rechteck)
Applying rated voltage (2730 Hz, 3.0 V, ½ duty, square wave)