

TABLE 1 SWITCH CIRCUIT

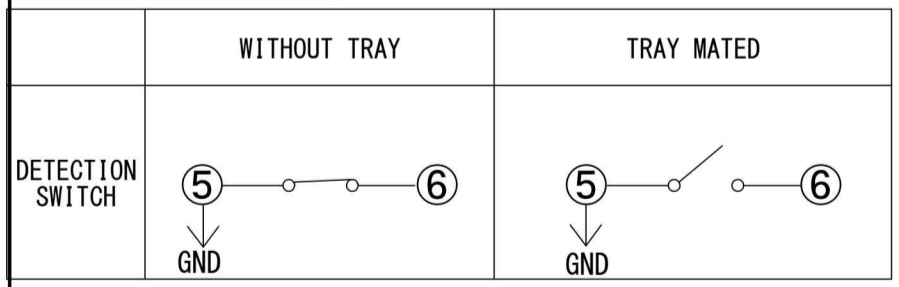


TABLE 3 4FF SIM PIN ASSIGNMENT

C1	Vcc
C2	RST
C3	CLK
C5	GND
C6	Vpp
C7	I/O

TABLE 4 microSD PIN ASSIGNMENT

#1	DAT2
#2	DAT3
#3	CMD
#4	Vdd
#5	CLK
#6	Vss
#7	DAT0
#8	DAT1

TABLE 2 FINISH

PART No.	PART NAME	BASE PLATING		TOP PLATING	
		CONTACT AREA	TERMINAL AREA	CONTACT AREA	TERMINAL AREA
①	CONTACT (4FF SIM)	Ni (1~6 μm)	Ni (1~6 μm)	Au (0.3 μm min.)	Au (0.03 μm min.)
②	CONTACT (μSD)	Ni (1~6 μm)	Ni (1~6 μm)	Au (0.3 μm min.)	
④	COVER	-	Ni (0.5~6 μm)	-	
⑤	DETECTION SWITCH1 (DSW1)	-	Ni (1~6 μm)	Au (0.1 μm min.)	
⑥	DETECTION SWITCH2 (DSW2)	-	Ni (1~6 μm)	Au (0.1 μm min.)	

NOTE1. OTHER COMPONENTS CANNOT TOUCH OR REST ON THIS AREA.
 NOTE2. ONLY GND PATTERN AND GND VIA HOLE IN ALLOWED IN THIS AREA.
 NOTE3. NO PATTERN AND VIA HOLE IN THIS AREA.
 NOTE4. DUMMY PAD SHOULD BE ELECTRICALLY ISOLATED. (No connection to GND on something else)
 No solder on this PAD
 NOTE5. RECOMMENDED OPEN APERTURE RATIO OF STENCIL MASK : 100% THICKNESS : 0.1mm
 NOTE6. LOT INFORMATION IS SHOWN AS BELOW.
 i.e. 6 X 2 5 1

PRODUCT LINE No. 6 : YEAR (2016)
 PRODUCTION DATE (YMD) 0 : MONTH (1, 2, 3, ..., 9, 0, X, Y)
 28 : DAY
 1 : PRODUCT LINE No. (1, 2, 3, ...)

APPLICABLE PCB DIMENSION (2:1)



符号 No.	名称 DESCRIPTION	個数 QTY.	材料 MATERIAL	仕上 FINISH	備考 REMARKS
8	EJECT LEVER	1	STAINLESS STEEL	-	
7	EJECT BAR	1	STAINLESS STEEL	-	
6	DETECTION SWITCH2 (DSW2)	1	COPPER ALLOY	Au over Ni	
5	DETECTION SWITCH1 (DSW1, GND)	1	COPPER ALLOY	Au over Ni	
4	COVER	1	STAINLESS STEEL	Au over Ni	
3	HUOSING	1	LCP	-	
2	CONTACT2 (μSD)	8	COPPER ALLOY	Au over Ni	
1	CONTACT1 (4FF SIM)	12	COPPER ALLOY	Au over Ni	

仕様書 (SPECIFICATION)	第1版 (ORIGINAL DATE)	尺度 (SCALE)
JACS-11162* JAHL-11162*	25/NOV/2016	5:1
一般公差 (GENERAL TOLERANCE)	製図 DR.	名称 (TITLE)
±0.8 × ±0.4 ×× ±0.1 ××× ±	担当 CHK. K. MIKAWA 査閲 APPD. K. KUME 承認 APPD. M. SHIMADA	ST19S020VCA
角度 (ANGLES)	系列名 (SERIES)	ST19
×° ± ××° ±	製造元 (MANUFACTURER)	日本航空電子工業株式会社
単位 (UNIT) : mm	図面番号 (DRAWING NO.)	SJ117667

JA-ELECTRONIC.COM
 JAPAN AVIATION ELECTRONICS INDUSTRY, LTD.
 図面番号 (DRAWING NO.) SJ117667
 版数 (VER.) 1