



Wire Protection & Management > Interconnect Devices > SolderSleeve Shield Terminators



Operating Temperature (Max): 150 °C

Expanded Inside Diameter (Min): 6.45 mm [.25 in]

Recovered Inside Diameter (Max): 3.3 mm [.13 in]

Pre-Installed Lead: No

Resistance Properties: Immersion Protection

Features

Product Type Features

Interconnect Device Splice Type	Shield Terminator
Temperature Indicator	None
Temperature Indicator Type	None

Configuration Features

Pre-Installed Lead	No
--------------------	----

Body Features

Lead Stranding	Stranded
----------------	----------

Dimensions

Shield Outside Diameter (Min)	3.3 mm [.13 in]
Compatible Jacket Diameter Range	5.95 mm [.235 in]
Product Length	19.1 mm [.75 in]
Expanded Inside Diameter (Min)	6.45 mm [.25 in]
Recovered Inside Diameter (Max)	3.3 mm [.13 in]

Usage Conditions

Operating Temperature (Max)	150 °C
Resistance Properties	Immersion Protection
Wire Temperature (Max)	150 °C

Industry Standards

--	--



MIL/NAS Specification (MIL-S-83519, NAS-1747)	RT-1404
Government Qualified	No

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Not Compliant
EU ELV Directive 2000/53/EC	Not Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JAN 2024 (240) SVHC > Threshold: Pb (37% in Solder) Article Safe Usage Statements: Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Low Bromine/Chlorine - Br and Cl < 900 ppm per homogenous material. Also BFR /CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts




TE Part # EG8162-000
HL1920E-230V-EURO

Customers Also Bought




TE Part #820131-000
362A014-25-0



TE Part #820078-000
342A034-25-0



TE Part #321884
TERM, STRAT,SOLIS, HT, 22-16, #4

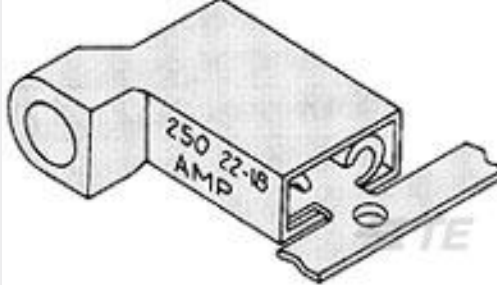


TE Part #2-520335-2
ULTRA-FAST 187 ASY REC 22-18 TPBR



TE Part #696453-000
B-053-70



TE Part #696437-000
B-051-00-01



TE Part #51864-9
PIDG Ring Tongue Terminals



TE Part #696684-000
B-051-01-01

TE Part #CTS-S20-20
CONT SOC ASSY

Documents

Product Drawings

ST63-4-00

English

Product Specifications

Product Specification

English