

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
HB	00		A	RELEASE	25OCT2012	HL.C	BH.Y

ELECTRICAL DATA

COIL DATA:

NOMINAL VOLTAGE:	12 VDC
OPERATE VOLTAGE:	9 VDC MAX. @ 25°C
RELEASE VOLTAGE:	1.2 VDC MIN. @ 25°C
RESISTANCE/OHMS:	86 ±10%
OPERATE TIME:	25 MS MAX. INCLUDING BOUNCE
RELEASE TIME:	25 MS MAX. INCLUDING BOUNCE

CONTACT DATA:

ARRANGEMENT:	2 FORM A (DPST-N.O.)
MATERIAL:	SILVER TIN OXIDE
RATING:	30A @ 120/277VAC, RESISTIVE 1.5HP @ 120VAC, 3HP @ 240VAC

MECHANICAL DATA:




MECHANICAL LIFE:	5 MILLION OPERATIONS
------------------	----------------------

ENVIRONMENTAL DATA:

TEMPERATURE RANGE:	STORAGE: -40°C TO +85°C OPERATING: -40°C TO +85°C
--------------------	--

DIELECTRIC BREAKDOWN:

	4,000V rms, 60Hz. BETWEEN CONTACTS & COIL
	1,500V rms, 60Hz. ACROSS OPEN CONTACTS
	2,000V rms, 60Hz. BETWEEN POLES

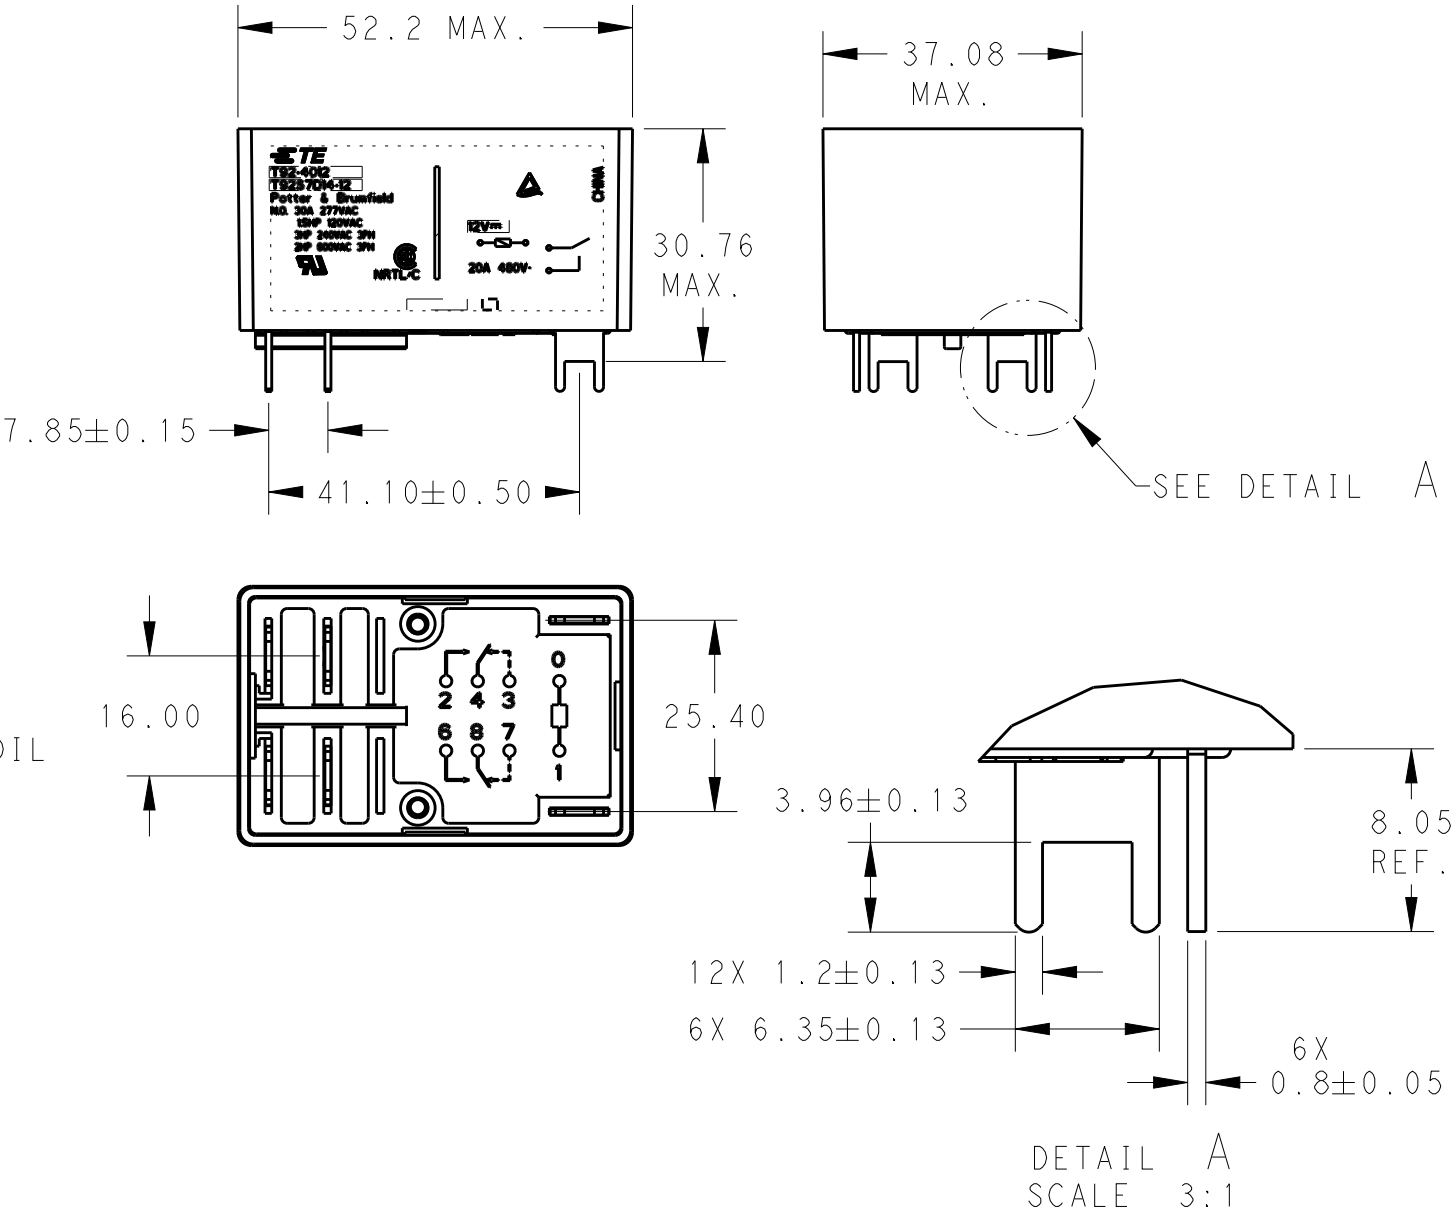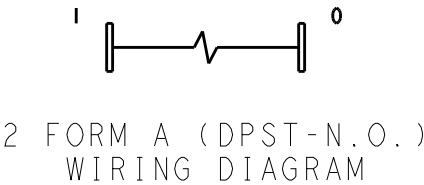

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	TIMOTHY.CHEN	TE PART NO. 1-1423008-4		
		CHK	LINCOLN.YU	 TE Connectivity		
		APVD	SUNNY.ZHANG	NAME RELAY ASSEMBLY T92P		
		PRODUCT SPEC	-			
		APPLICATION SPEC	-			
		WEIGHT	-			
		Customer Drawing	-			
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		SIZE	CAGE CODE	DRAWING NO
				A3	00779	C-T92-4012
				RESTRICTED TO		-
				SCALE		-
				SHEET		1 OF 1
				REV		A