



# TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,  
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: [tstsales@mail.taisaw.com](mailto:tstsales@mail.taisaw.com) Web: [www.taisaw.com](http://www.taisaw.com)

## Product Specification Approval Sheet

Product Name: SAW Filter 2067.5 MHz SMD 3.0X3.0 mm

TST Parts No.: TA0741B

Customer Parts No.: \_\_\_\_\_


Customer signature required


Company: \_\_\_\_\_

Division: \_\_\_\_\_

Approved by : \_\_\_\_\_

Date: \_\_\_\_\_

Checked by: \_\_\_\_\_ Anne Chen 

Approved by: \_\_\_\_\_ Francis Chen 

Date: \_\_\_\_\_ 9, 08, 2010

1. Customer signed back is required before TST can proceed with sample build and receive orders.
2. Orders received without customer signed back will be regarded as agreement on the specifications.
3. Any specifications changes must be approved upon by both parties and a new revision of specifications shall be released to reflect the changes.



# TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,  
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: [tstsales@mail.taisaw.com](mailto:tstsales@mail.taisaw.com) Web: [www.taisaw.com](http://www.taisaw.com)

## SAW Filter 2067.5 MHz

MODEL NO.:TA0741B

REV. NO.:1

### A. MAXIMUM RATING:

1. Input Power Level: 10 dBm
2. DC Voltage : 3V
3. Operating Temperature: -40°C to +85°C
4. Storage Temperature: -40°C to +85°C


RoHS Compliant  
Lead free  
Lead-free soldering

### B. ELECTRICAL CHARACTERISTICS:


Item	Unit	Min.	Type.	Max.	Note
Center Frequency <b>Fc</b>	MHz	-	2067.5	-	-
Insertion Loss (2025.5 ~ 2109.5 MHz) <b>IL</b>	dB	-	3.3	4	-
Amplitude Ripple (2025.5 ~ 2109.5 MHz)	dB	-	1.6	2.5	-
VSWR (2025.5 ~ 2109.5 MHz)		-	2	2.5	-
Group Delay (2025.5~2109.5 MHz)	ns	-	13	25	
<b>Attenuation</b> (Reference level from 0 dB)					
1994 MHz	dB	10	30	-	-
1800 MHz	dB	30	33	-	-
2300 MHz	dB	30	36	-	-

### C. MEASUREMENT CIRCUIT:

HP Network analyzer

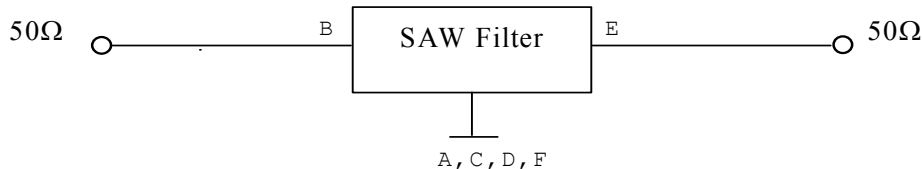


**D.OUTLINE DRAWING:**

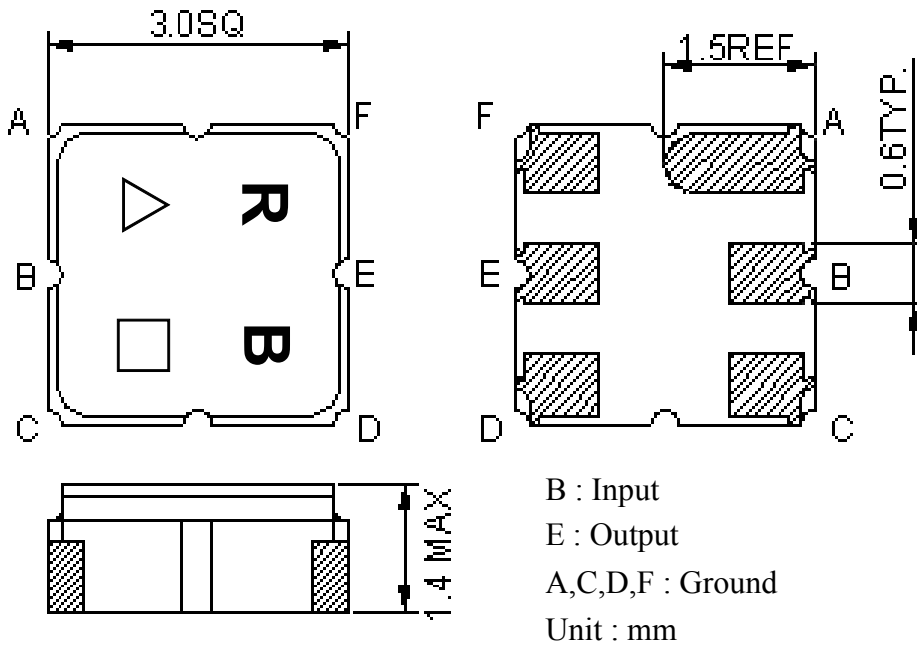



△ : Year Code (2010->0, ..., 2019->9)

□ : Date Code (Follow the table from planner each year)

**E. PCB Footprint:**


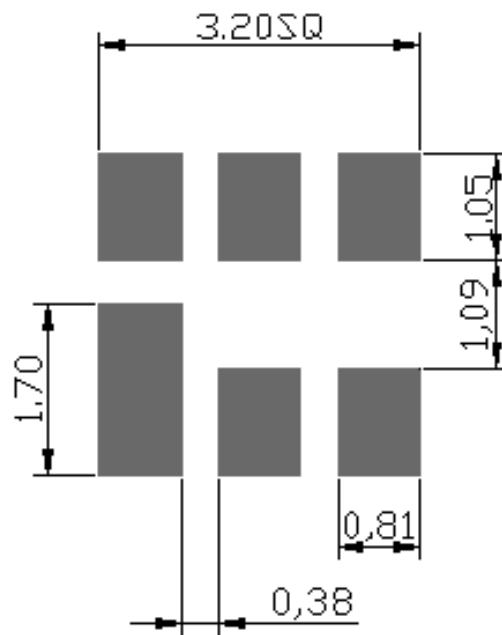


## F. Frequency Characteristics :

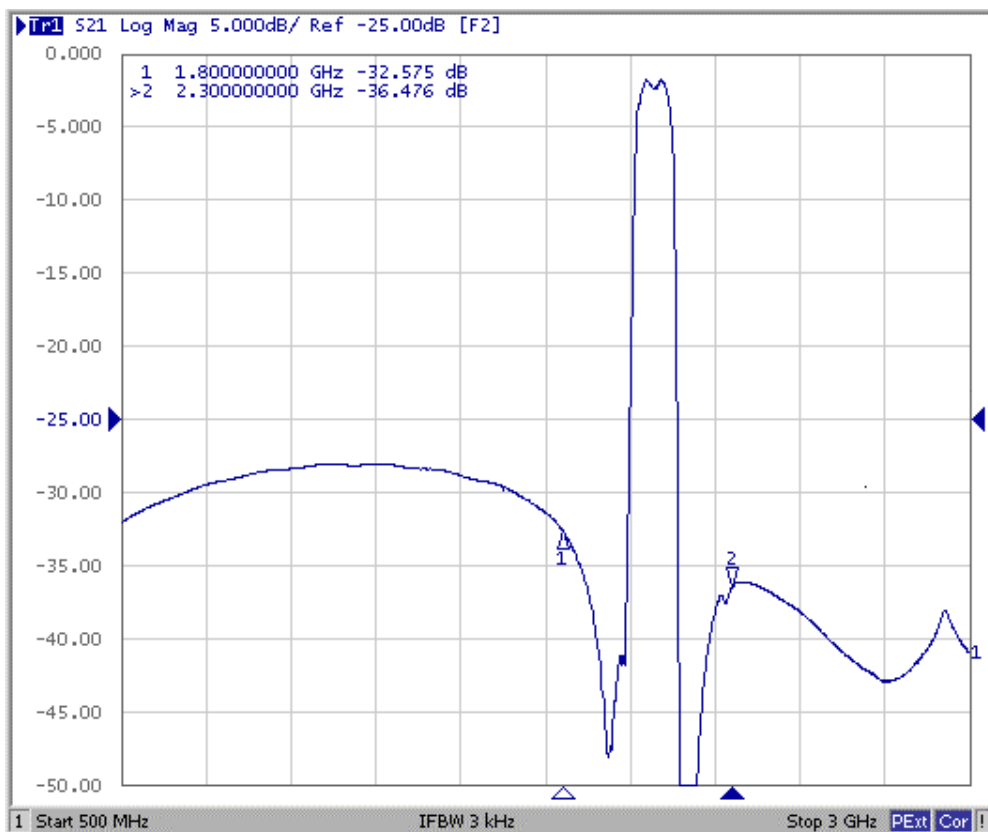
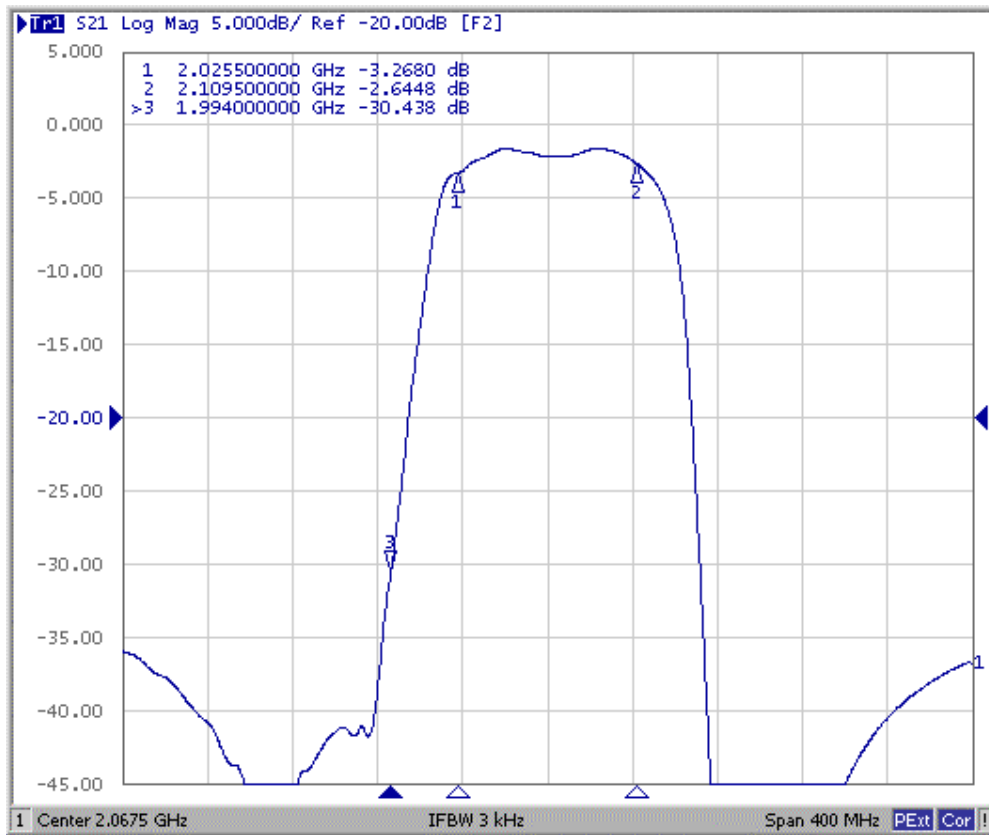


Reflection Functions :

S11

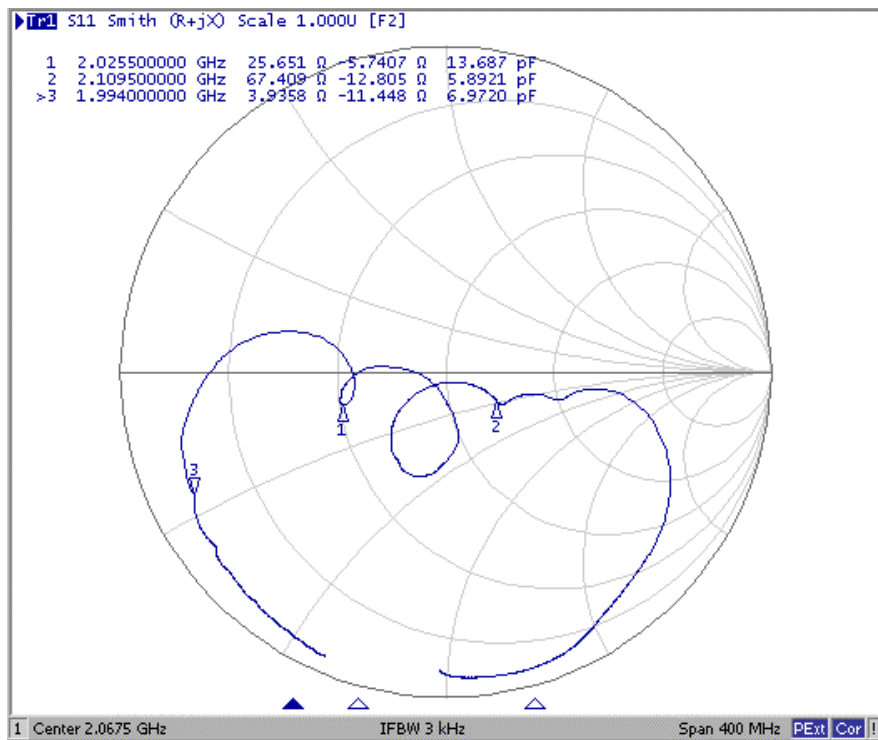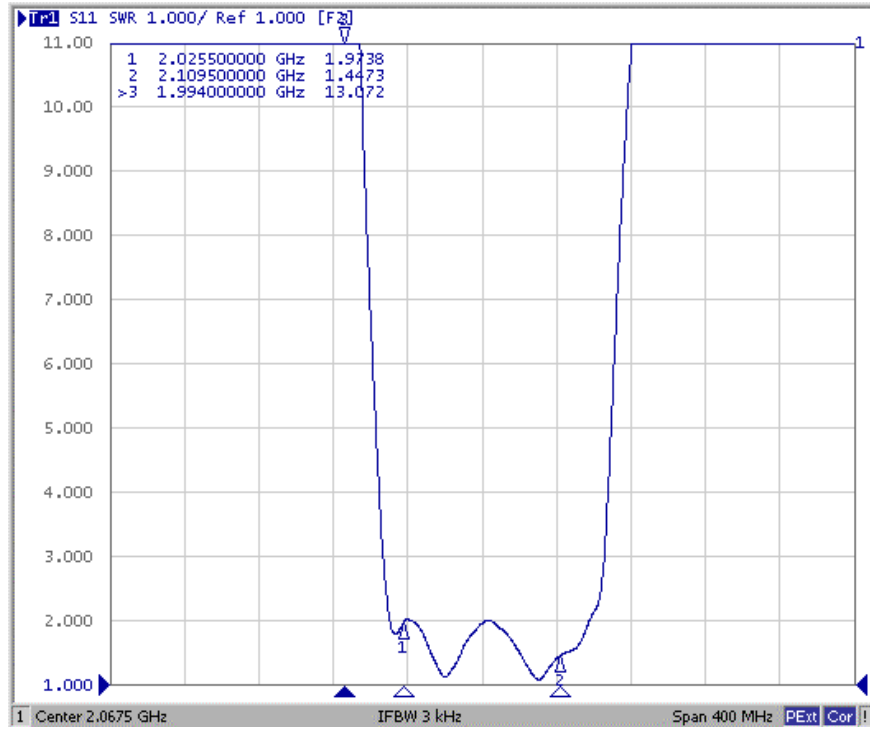


# S22

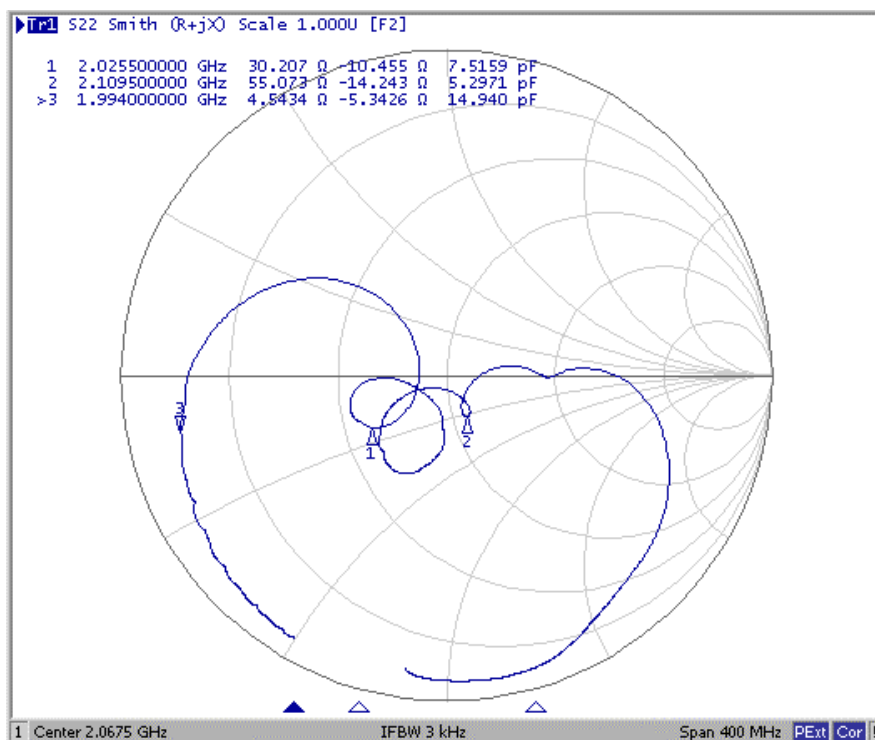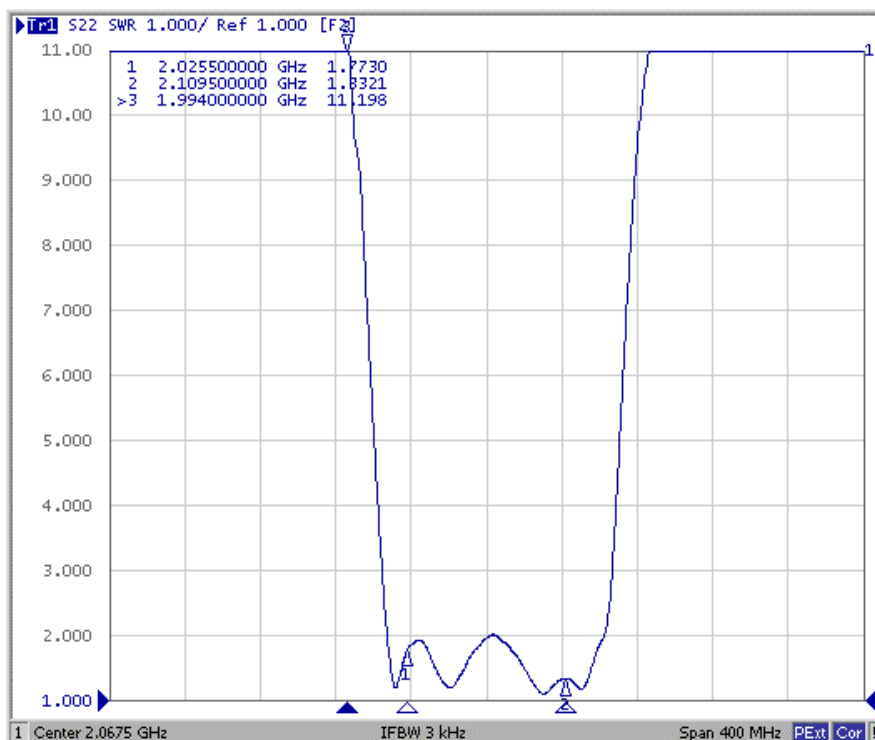


**G. PACKING:**

**1. REEL DIMENSION**

(Reel Count : 7"=1000 ; 13"=3000 )

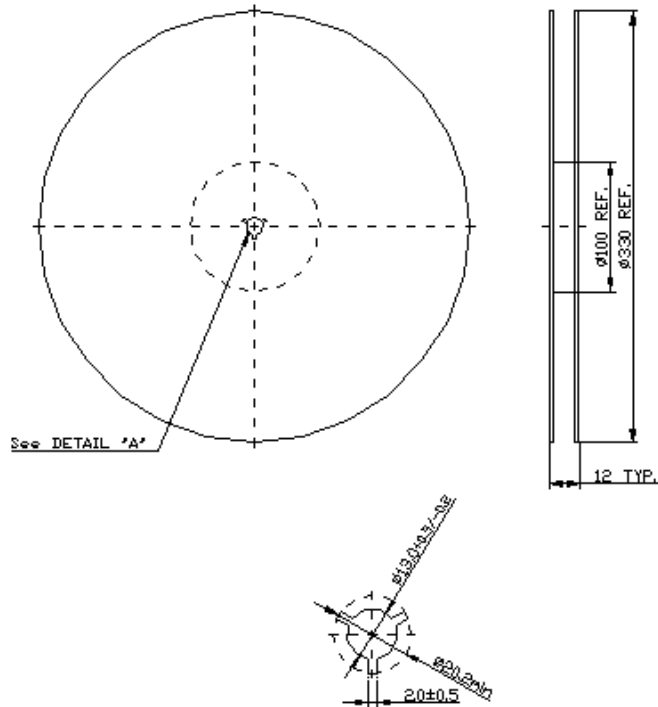

**2.TAPE DIMENSION**

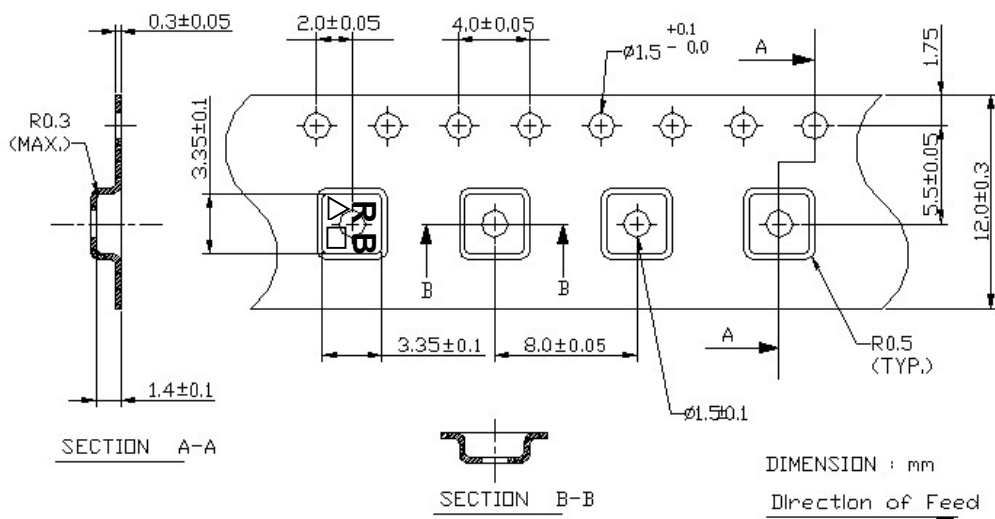

## H. RECOMMENDED REFLOW PROFILE :

