

7CH DARLINGTON SINK DRIVER


The TD62001P/AP/F/AF Series are high-voltage, high-current darlington drivers comprised of seven NPN darlington pairs.

All units feature integral clamp diodes for switching inductive loads.

Applications include relay, hammer, lamp and display (LED) drivers.

FEATURES


- Output current (single output) 500mA MAX.
- High sustaining voltage output
35V MIN. (TD62001P/F Series)
50V MIN. (TD62001AP/AF Series)
- Output clamp diodes
- Inputs compatible with various types of logic
- Package Type-P, AP : DIP-16pin
- Package Type-F, AF : SOP-16pin

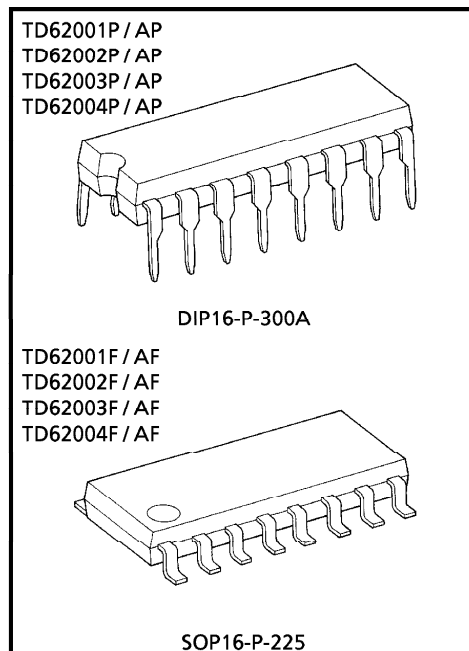

Weight DIP16-P-300A : 1.11g (Typ.)
SOP16-P-225 : 0.16g (Typ.)

TYPE	INPUT BASE RESISTOR	DESIGNATION
TD62001P/AP/F/AF	External	General Purpose
TD62002P/AP/F/AF	10.5-k Ω + 7V Zenner diode	14~25V PMOS
TD62003P/AP/F/AF	2.7k Ω	TTL, 5V CMOS
TD62004P/AP/F/AF	10.5k Ω	6~15V PMOS, CMOS

PIN CONNECTION (TOP VIEW)

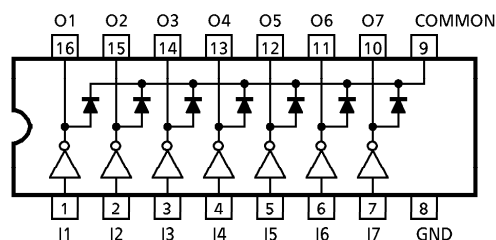


© The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.


© These TOSHIBA products are intended for use in general commercial applications (office equipment, communication equipment, measuring equipment, domestic appliances, etc.). please make sure that you consult with us before you use these TOSHIBA products in equipment which requires extraordinarily high quality and/or reliability, and in equipment which may involve life threatening or critical application, including but not limited to such uses as atomic energy control, airplane or spaceship instrumentation, traffic signals, medical instrumentation, combustion control, all types of safety devices, etc. TOSHIBA cannot accept and hereby disclaims liability for any damage which may occur in case the TOSHIBA products are used in such equipment or applications without prior consultation with TOSHIBA.

SCHEMATICS (EACH DRIVER)


TD62001P / AP / F / AF




TD62002P / AP / F / AF

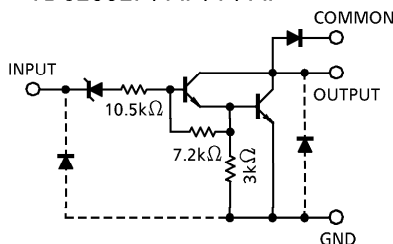

TD62003P / AP / F / AF

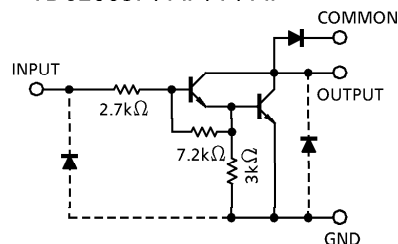

TD62004P / AP / F / AF

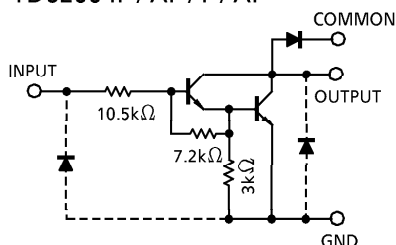

(Note) The input and output parasitic diodes cannot be used as clamp diodes.

MAXIMUM RATINGS (Ta = 25°C)

CHARACTERISTIC		SYMBOL	RATING	UNIT
Output Sustaining Voltage	P, F	$V_{CE(SUS)}$	- 0.5~35	V
	AP, AF		- 0.5~50	
Output Current		I_{OUT}	500	mA / ch
Input Voltage		V_{IN} (Note 1)	- 0.5~30	V
Input Current		I_{IN} (Note 2)	25	mA
Clamp Diode Reverse Voltage	P, F	V_R	35	V
	AP, AF		50	
Clamp Diode Forward Current		I_F	500	mA
Power Dissipation	P	P_D	1.0	W
	AP		1.47	
	F, AF		0.54 / 0.69 (Note 3)	
Operating Temperature	P	T_{opr}	- 30~75	°C
	AP, F, AF		- 40~85	
Storage Temperature		T_{stg}	- 55~150	°C

(Note 1) Except TD62001P / AP / F / AF

(Note 2) Only TD62001P / AP / F / AF

(Note 3) On glass epoxy PCB (30×30×1.6mm Cu 50%)

RECOMMENDED OPERATING CONDITIONS ($T_a = -40 \sim 85^\circ\text{C}$ and $T_a = -30 \sim 75^\circ\text{C}$ for only Type-P)

CHARACTERISTIC		SYMBOL	CONDITION		MIN.	TYP.	MAX.	UNIT
Output Sustaining Voltage	P, F	V _{CE (SUS)}			0	—	35	V
	AP, AF				0	—	50	
Output Current	AP	I _{OUT}	T _{pw} = 25ms 7 Circuits Ta = 85°C Tj = 120°C	Duty = 10%	0	—	370	mA / ch
	P			Duty = 50%	0	—	130	
				Duty = 10%	0	—	295	
				Duty = 50%	0	—	95	
				Duty = 10%	0	—	233	
	F, AF			Duty = 50%	0	—	70	
Input Voltage	Except TD62001P / AP / F / AF	V _{IN}			0	—	24	V
Input Voltage (Output On)	TD62002	V _{IN (ON)}	I _{OUT} = 400mA h _{FE} = 800		14.5	—	24	V
	TD62003				2.8	—	24	
	TD62004				6.2	—	24	
Input Voltage (Output Off)	TD62001	V _{IN (OFF)}			0	—	0.6	V
	TD62002				0	—	7.4	
	TD62003				0	—	0.7	
	TD62004				0	—	1.0	
Input Current	Only TD62001	I _{IN}			0	—	10	mA
Clamp Diode Reverse Voltage	P, F	V _R			—	—	35	V
	AP, AF				—	—	50	
Clamp Diode Forward Current		I _F			—	—	350	mA
Power Dissipation	P	P _D	Ta = 85°C		—	—	0.6	W
	AP				—	—	0.76	
	AF, F		(Note) Ta = 85°C		—	—	0.36	


(Note) On glass epoxy PCB (30 × 30 × 1.6mm Cu 50%)

ELECTRICAL CHARACTERISTICS (Ta = 25°C unless otherwise noted)


CHARACTERISTIC		SYMBOL	TEST CIR- CUIT	TEST CONDITION		MIN.	TYP.	MAX.	UNIT
Output Leakage Current	AP, AF	I _{CEX}	1	V _{CE} = 50V, Ta = 25°C		—	—	50	μA
				V _{CE} = 50V, Ta = 85°C		—	—	100	
	F			V _{CE} = 35V, Ta = 25°C		—	—	50	
				V _{CE} = 35V, Ta = 85°C		—	—	100	
	P			V _{CE} = 35V, Ta = 25°C		—	—	50	
				V _{CE} = 35V, Ta = 75°C		—	—	100	
Collector-Emitter Saturation Voltage		V _{CE} (sat)	2	I _{OUT} = 350mA, I _{IN} = 500μA		—	1.3	1.6	V
				I _{OUT} = 200mA, I _{IN} = 350μA		—	1.1	1.3	
				I _{OUT} = 100mA, I _{IN} = 250μA		—	0.9	1.1	
DC Current Transfer Ratio		h _{FE}	2	V _{CE} = 2V, I _{OUT} = 350mA		1000	—	—	
Input Current (Output On)	TD62002	I _{IN} (ON)	3	V _{IN} = 20V, I _{OUT} = 350mA		—	1.1	1.7	mA
	TD62003			V _{IN} = 2.4V, I _{OUT} = 350mA		—	0.4	0.7	
	TD62004			V _{IN} = 9.5V, I _{OUT} = 350mA		—	0.8	1.2	
Input Current (Output Off)	P	I _{IN} (OFF)	4	I _{OUT} = 500μA, Ta = 75°C		50	65	—	μA
	AP, F, AF			I _{OUT} = 500μA, Ta = 85°C		50	65	—	
Input Voltage (Output On)	TD62002	V _{IN} (ON)	5	V _{CE} = 2V h _{FE} = 800	I _{OUT} = 350mA	—	—	13.7	V
					I _{OUT} = 200mA	—	—	11.4	
	TD62003				I _{OUT} = 350mA	—	—	2.6	
					I _{OUT} = 200mA	—	—	2.0	
	TD62004				I _{OUT} = 350mA	—	—	4.7	
					I _{OUT} = 200mA	—	—	4.4	
Clamp Diode Reverse Current	AP, AF	I _R	6	V _R = 50V, Ta = 25°C		—	—	50	μA
				V _R = 50V, Ta = 85°C		—	—	100	
	F			V _R = 35V, Ta = 25°C		—	—	50	
				V _R = 35V, Ta = 85°C		—	—	100	
	P			V _R = 35V, Ta = 25°C		—	—	50	
				V _R = 35V, Ta = 75°C		—	—	100	
Clamp Diode Forward Voltage		V _F	7	I _F = 350mA		—	—	2.0	V
Input Capacitance		C _{IN}	—			—	15	—	pF
Turn-On Delay	P, F	t _{ON}	8	V _{OUT} = 35V, R _L = 87.5Ω C _L = 15pF		—	0.1	—	μs
	AP, AF			V _{OUT} = 50V, R _L = 125Ω C _L = 15pF		—	0.1	—	
Turn-Off Delay	P, F	t _{OFF}	8	V _{OUT} = 35V, R _L = 87.5Ω C _L = 15pF		—	0.2	—	
	AP, AF			V _{OUT} = 50V, R _L = 125Ω C _L = 15pF		—	0.2	—	

TEST CIRCUIT


1. I_{CEX}




2. $V_{CE}(\text{sat})$, h_{FE}




3. $I_{IN}(\text{ON})$




4. $I_{IN}(\text{OFF})$




5. $V_{IN}(\text{ON})$




6. I_R



7. V_F



8. t_{ON} , t_{OFF}

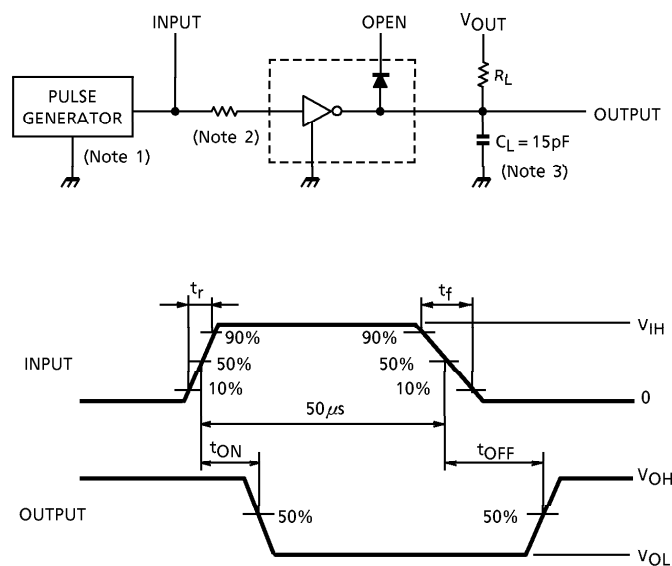







(Note 1) Pulse width 50μs, duty cycle 10%
Output impedance 50Ω, $t_r \leq 5\text{ns}$, $t_f \leq 10\text{ns}$







(Note 2) See below







INPUT CONDITION



TYPE NUMBER	R1	V _{IH}
TD62001P / AP / F / AF	2.7kΩ	3V
TD62002P / AP / F / AF	0	13V
TD62003P / AP / F / AF	0	3V
TD62004P / AP / F / AF	0	8V

(Note 3) C_L includes probe and jig capacitance.

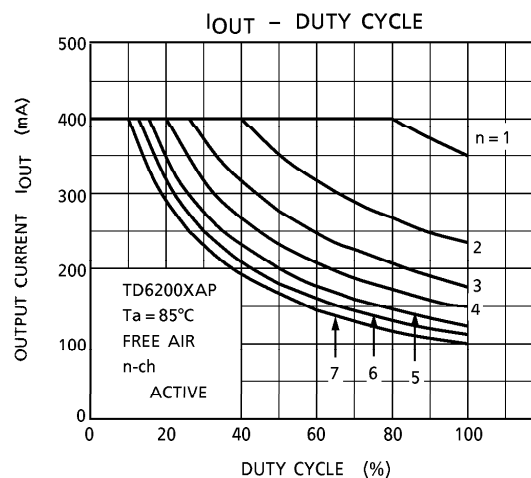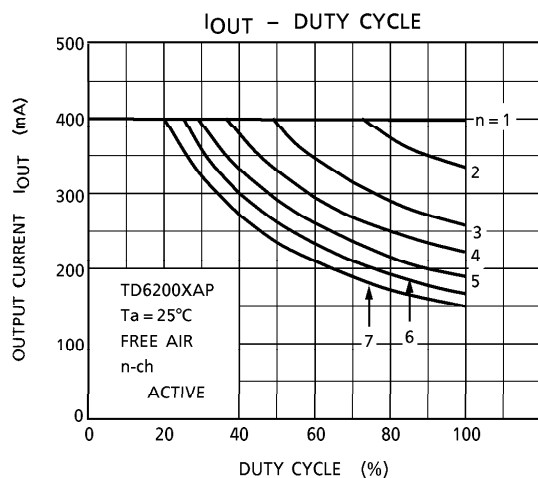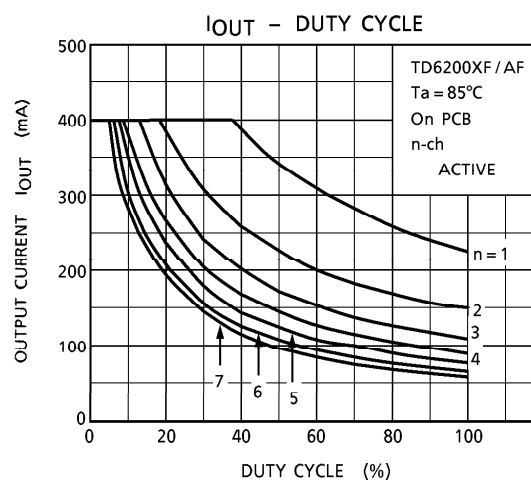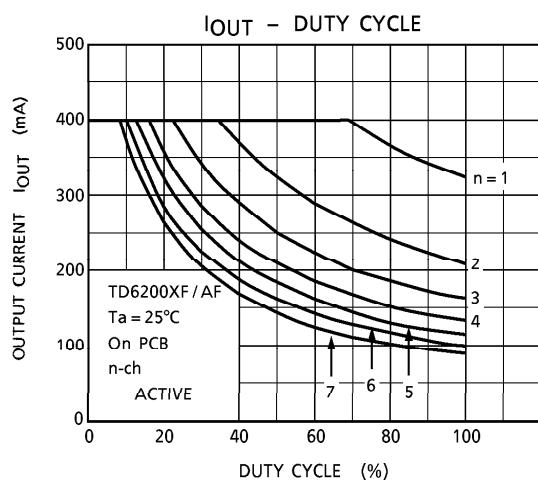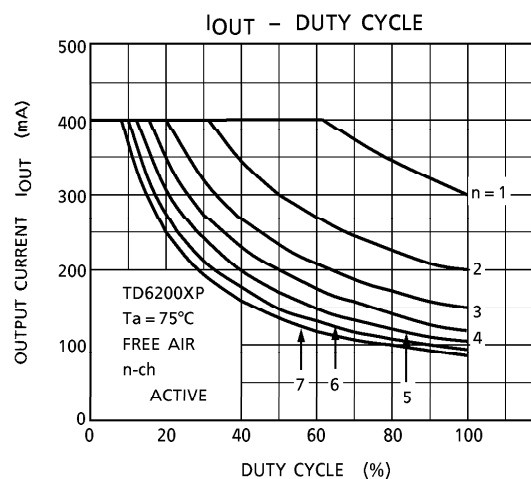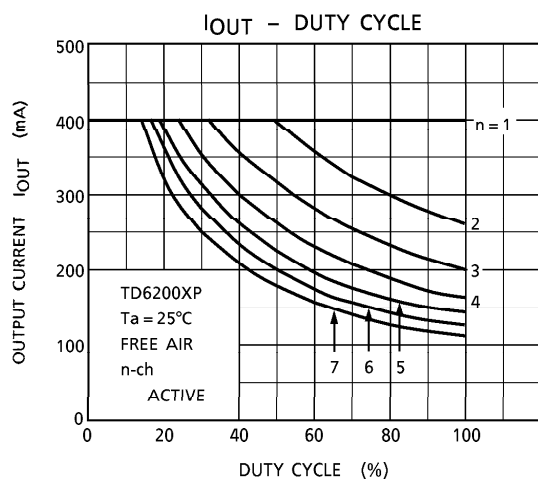

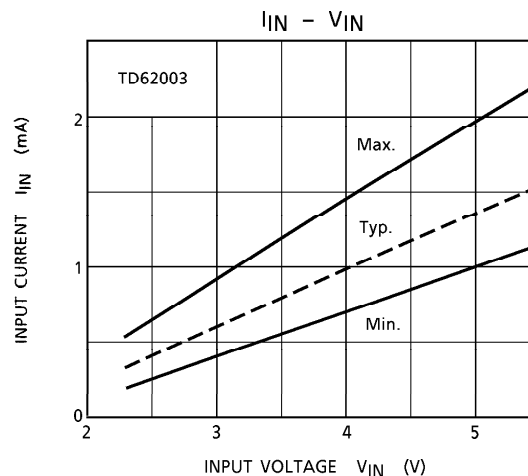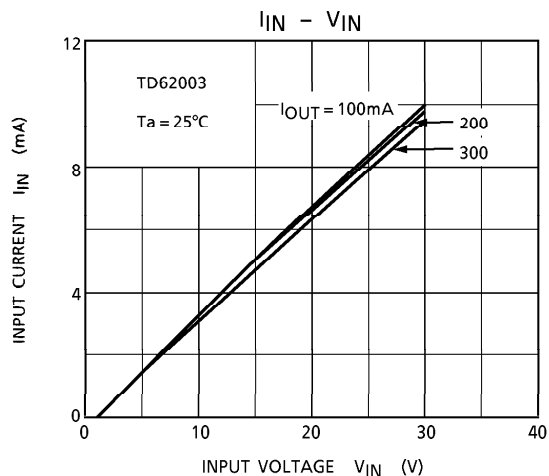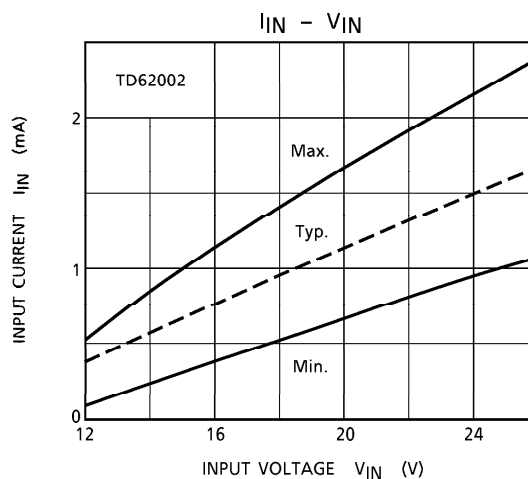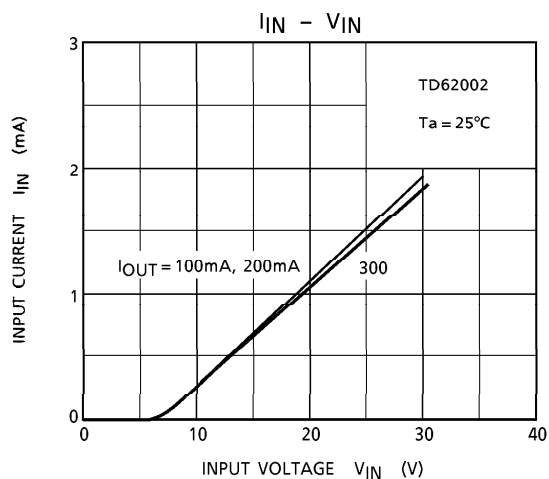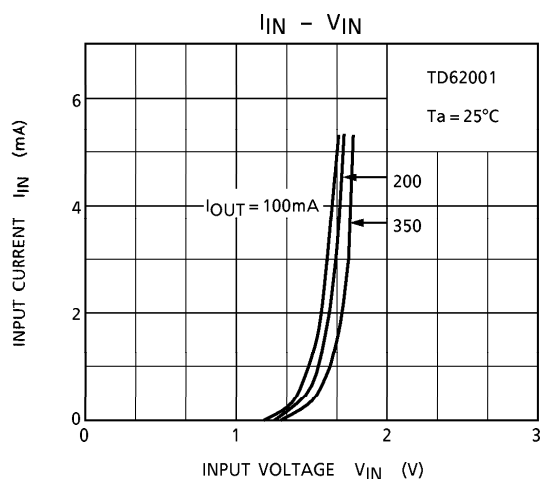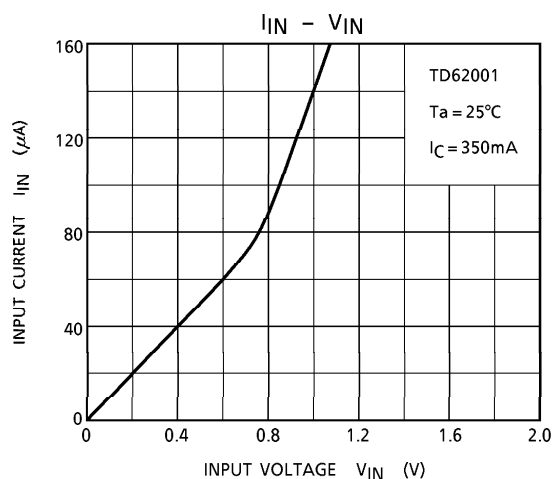


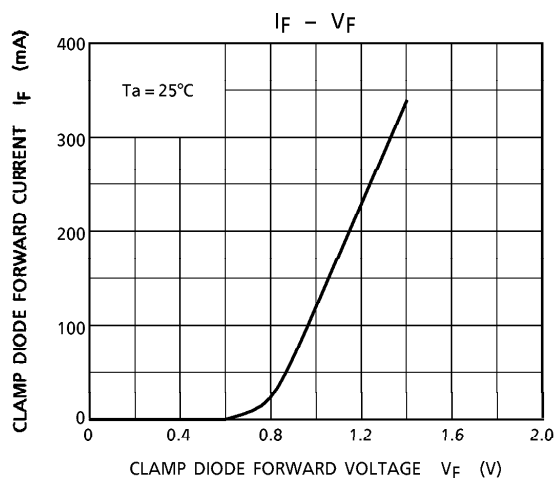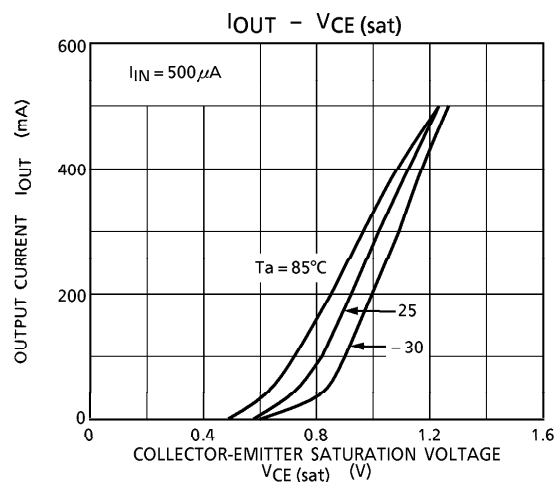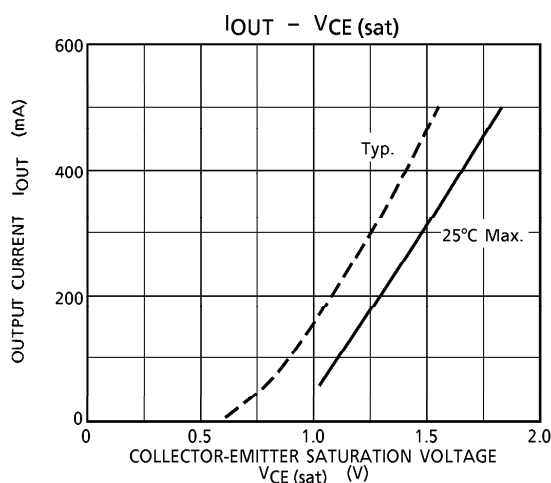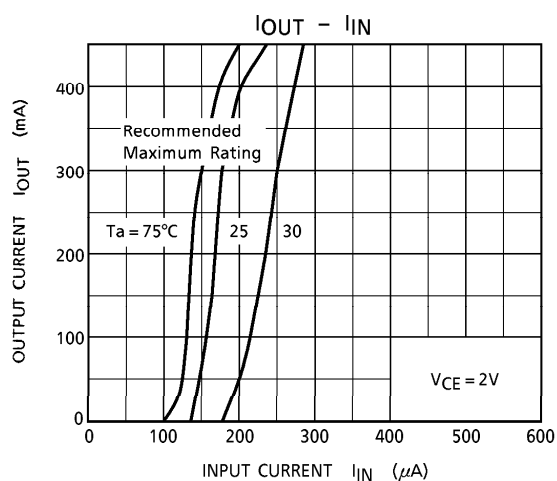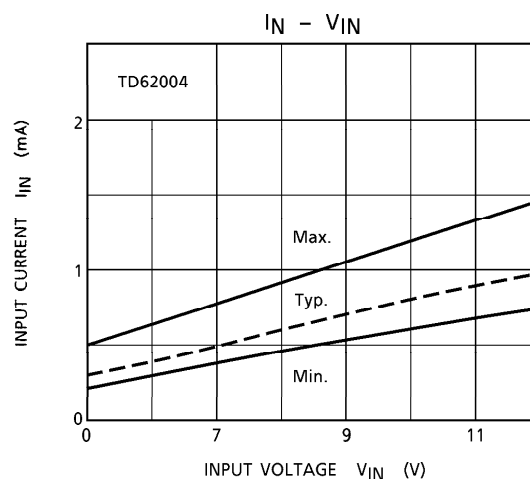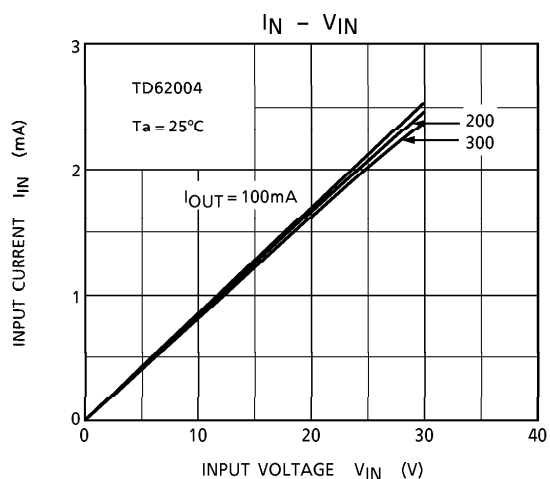

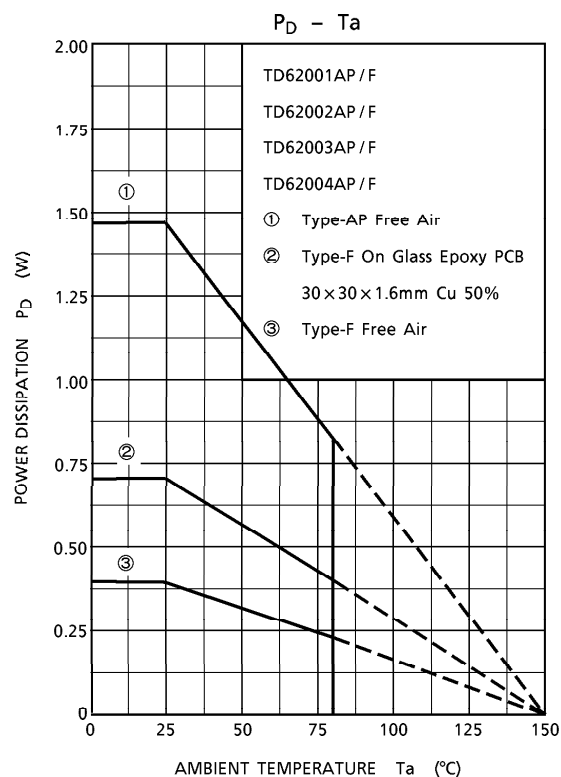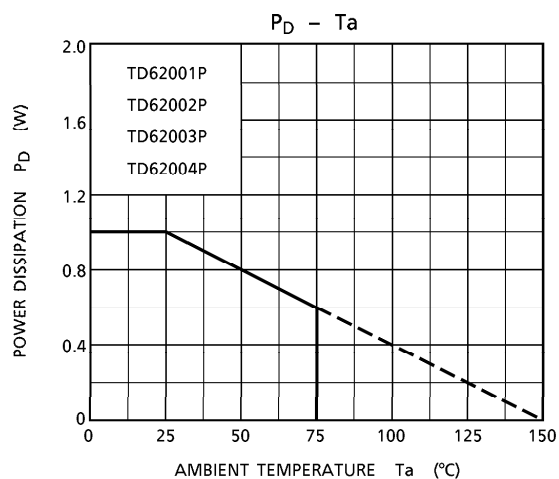

OUTLINE DRAWING
DIP16-P-300A

Unit : mm




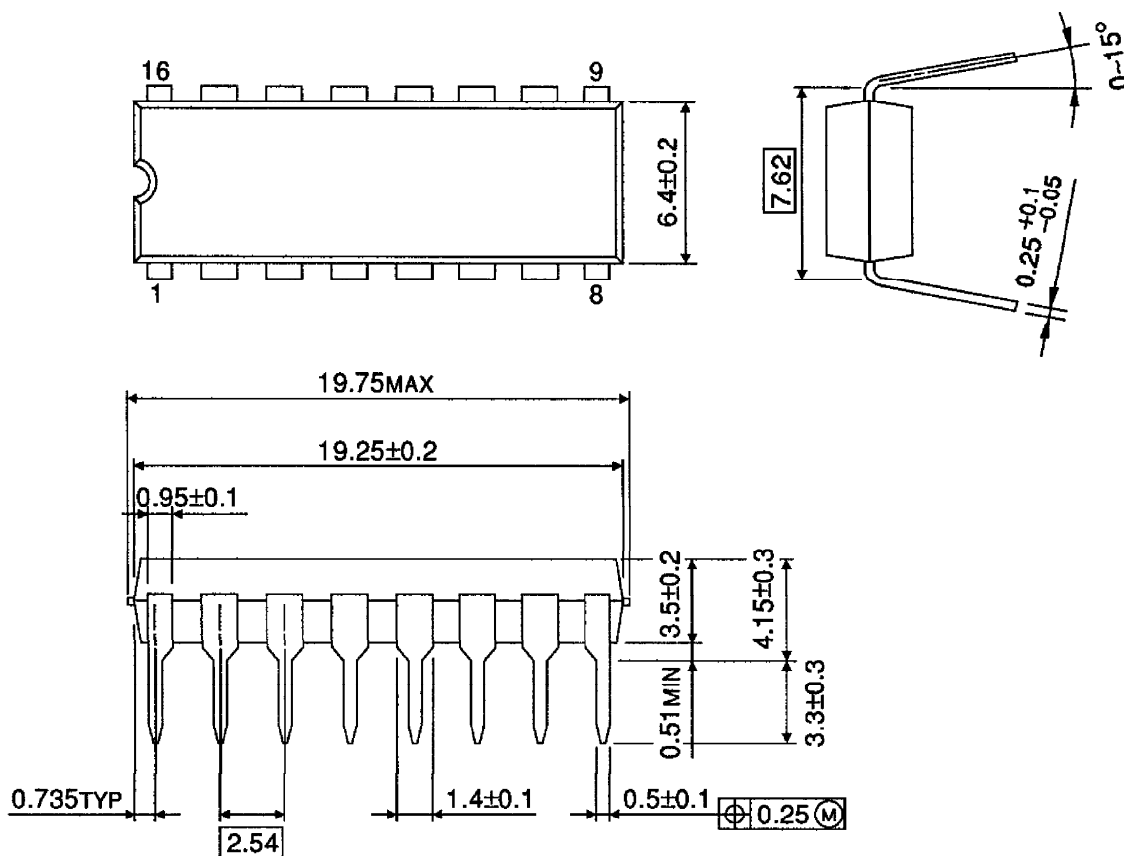


Weight : 1.11g (Typ.)

OUTLINE DRAWING

SOP16-P-225

Unit : mm

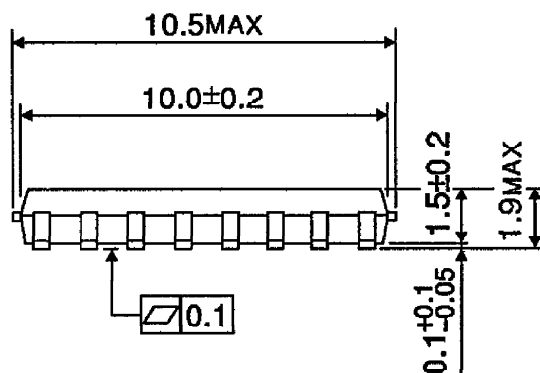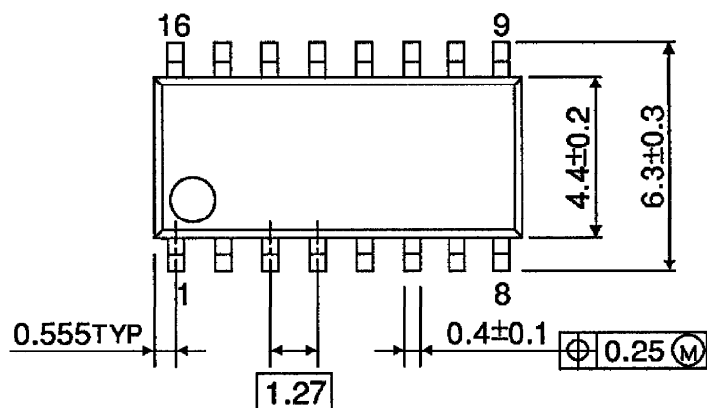

Weight : 0.16g (Typ.)