


- Chassis mount with screw terminal block
- Ultra wide 4:1 input voltage ranges 9–36, 18–75, 43–160 VDC
- EN 50155 approval for railway applications
- Very high efficiency up to 91%
- No minimum load
- Soft start
- Adjustable output voltage +10 / -20%
- Sense line
- Remote On/Off input
- Under voltage lock-out circuit

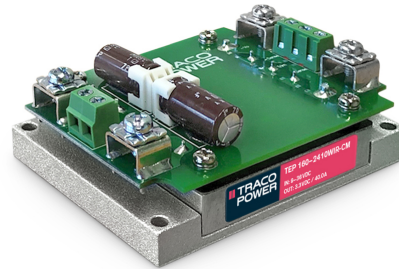

The TEP 160WIRCM Series is a family of isolated high performance DC/DC converter modules with ultra-wide 4:1 input voltage ranges. They come in chassis mount version with screw terminal block. A very high efficiency allows full power operation without forced air cooling at 25°C. The very wide input voltage range and reverse input voltage protection make these converters interesting solution for battery operated systems. Typical applications are in telecom/datacom, industry control and railway systems for on board power distribution.

Options

TEP-MK1	- Optional DIN-Rail Mounting Kit: www.tracopower.com/products/tep-mk1.pdf
<p>on demand (backorder with MOQ non stocking item)</p>	<ul style="list-style-type: none"> - Optional model with 3.3 VDC / 40'000 mA Output and 9 - 36 VDC Input - Optional model with 5 VDC / 28'000 mA Output and 9 - 36 VDC Input - Optional model with 12 VDC / 12'000 mA Output and 9 - 36 VDC Input - Optional model with 15 VDC / 9'500 mA Output and 9 - 36 VDC Input - Optional model with 24 VDC / 6'000 mA Output and 9 - 36 VDC Input - Optional model with 28 VDC / 5'000 mA Output and 9 - 36 VDC Input - Optional model with 48 VDC / 3'000 mA Output and 9 - 36 VDC Input - Optional model with 3.3 VDC / 40'000 mA Output and 18 - 75 VDC Input - Optional model with 5 VDC / 30'000 mA Output and 18 - 75 VDC Input - Optional model with 12 VDC / 13'000 mA Output and 18 - 75 VDC Input - Optional model with 15 VDC / 10'000 mA Output and 18 - 75 VDC Input - Optional model with 24 VDC / 6'500 mA Output and 18 - 75 VDC Input - Optional model with 28 VDC / 5'500 mA Output and 18 - 75 VDC Input - Optional model with 48 VDC / 3'200 mA Output and 18 - 75 VDC Input - Optional model with 3.3 VDC / 43'000 mA Output and 43 - 160 VDC Input - Optional model with 5 VDC / 32'000 mA Output and 43 - 160 VDC Input - Optional model with 12 VDC / 15'000 mA Output and 43 - 160 VDC Input - Optional model with 15 VDC / 12'000 mA Output and 43 - 160 VDC Input - Optional model with 24 VDC / 7'500 mA Output and 43 - 160 VDC Input - Optional model with 28 VDC / 6'500 mA Output and 43 - 160 VDC Input - Optional model with 48 VDC / 3'800 mA Output and 43 - 160 VDC Input - Negative (passive = Off) Remote On/Off function

Input Specifications

Input Current	- At no load	24 Vin models: 20 mA typ. 48 Vin models: 15 mA typ. 110 Vin models: 10 mA typ.
Surge Voltage		24 Vin models: 50 VDC max. (1 s max.) 48 Vin models: 100 VDC max. (1 s max.) 110 Vin models: 185 VDC max. (1 s max.)
Under Voltage Lockout		24 Vin models: 7.3 VDC min. / 7.7 VDC typ. / 8.1 VDC max. 48 Vin models: 15.5 VDC min. / 16 VDC typ. / 16.3 VDC max. 110 Vin models: 33 VDC min. / 34.5 VDC typ. / 36 VDC max.
Recommended Input Fuse		24 Vin models: 25'000 mA (fast acting) 48 Vin models: 15'000 mA (fast acting) 110 Vin models: 8'000 mA (fast acting) (The need of an external fuse has to be assessed in the final application.)
Input Filter		Internal Pi-Type

Output Specifications

Output Voltage Adjustment		-20% to +10% (By external trim resistor) See application note: www.tracopower.com/overview/tep160wircm Output power must not exceed rated power!
Voltage Set Accuracy		±1% max.
Regulation	- Input Variation (Vmin - Vmax) - Load Variation (0 - 100%)	0.1% max. 0.1% max.
Ripple and Noise (20 MHz Bandwidth)		3.3 Vout models: 75 mVp-p max. (w/ 1 µF X7R // 25 µF poscap) 5 Vout models: 75 mVp-p max. (w/ 1 µF X7R // 25 µF poscap) 12 Vout models: 100 mVp-p max. (w/ 1 µF X7R // 25 µF poscap) 15 Vout models: 100 mVp-p max. (w/ 1 µF X7R // 25 µF poscap) 24 Vout models: 200 mVp-p max. (w/ 4.7 µF X7R) 28 Vout models: 200 mVp-p max. (w/ 4.7 µF X7R) 48 Vout models: 300 mVp-p max. (w/ 2.2 µF X7R)
Capacitive Load	- 24 Vin input	3.3 Vout models: 121'000 µF max. 5 Vout models: 56'000 µF max. 12 Vout models: 10'000 µF max. 15 Vout models: 6'300 µF max. 24 Vout models: 2'500 µF max. 28 Vout models: 1'700 µF max. 48 Vout models: 620 µF max.
	- 48 Vin input	3.3 Vout models: 121'000 µF max. 5 Vout models: 60'000 µF max. 12 Vout models: 10'800 µF max. 15 Vout models: 6'600 µF max. 24 Vout models: 2'700 µF max. 28 Vout models: 1'900 µF max. 48 Vout models: 660 µF max.
	- 110 Vin input	3.3 Vout models: 130'000 µF max. 5 Vout models: 64'000 µF max. 12 Vout models: 12'500 µF max. 15 Vout models: 8'000 µF max. 24 Vout models: 3'100 µF max. 28 Vout models: 2'300 µF max. 48 Vout models: 790 µF max.
Minimum Load		Not required
Temperature Coefficient		±0.02 %/K max.
Start-up Time		75 ms typ.
Short Circuit Protection		Continuous, Automatic recovery

All specifications valid at nominal voltage, full load and +25°C after warm-up time unless otherwise stated.

Output Current Limitation	120 - 150% of I _{out} max.
Overvoltage Protection	115 - 130% of V _{out} nom.
Transient Response	- Response Time 200 µs typ. / 250 µs max. (25% Load Step)

Safety Specifications

Safety Standards	- IT / Multimedia Equipment - Railway Applications - Certification Documents	EN 60950-1 IEC 60950-1 UL 60950-1 EN 50155 www.tracopower.com/overview/tep160wircm
Pollution Degree		PD 2
Over Voltage Category		OVC II

EMC Specifications

EMI Emissions	- Conducted Emissions	EN 55011 class B (with external filter) EN 55032 class B (with external filter)
	- Radiated Emissions	EN 55011 class B (with external filter) EN 55032 class B (with external filter)
	External filter proposal:	www.tracopower.com/overview/tep160wircm
EMS Immunity	- Electrostatic Discharge	EN 50155 (Railway Applications) EN 50121-3-2 (EMC for Rolling Stock)
	- RF Electromagnetic Field	Air: EN 61000-4-2, ±8 kV, perf. criteria A Contact: EN 61000-4-2, ±6 kV, perf. criteria A
	- EFT (Burst) / Surge	EN 61000-4-3, 20 V/m, perf. criteria A EN 61000-4-4, ±2 kV, perf. criteria A EN 61000-4-5, ±2 kV, perf. criteria A
	- Conducted RF Disturbances	Ext. input component: 24 & 48 V _{in} models: 2x KY 220 µF 110 V _{in} models: 2x KXJ 150 µF EN 61000-4-6, 10 V _{rms} , perf. criteria A
	- PF Magnetic Field	Continuous: EN 61000-4-8, 100 A/m, perf. criteria A 1 s: EN 61000-4-8, 1000 A/m, perf. criteria A

General Specifications

Relative Humidity		95% max. (non condensing)
Temperature Ranges	- Operating Temperature	-40°C to +75°C
	- Case Temperature	+105°C max.
	- Storage Temperature	-40°C to +105°C
Power Derating	- High Temperature	See application note: www.tracopower.com/overview/tep160wircm
Over Temperature Protection Switch Off	- Protection Mode - Measurement Point	115°C typ. (Automatic recovery at 105°C typ.) Base-Plate
Cooling System		Natural convection (20 LFM)
Sense Function		10% max. of V _{out} nom. (Sense line to be connected to the output either at the module or at the load under regard of polarity.)
	Remote Control	- Voltage Controlled Remote
	- Off Idle Input Current - Remote Pin Input Current	On: 3.0 to 12 VDC or open circuit Off: 0 to 1.2 VDC or short circuit Refers to 'Remote' and '-Vin' Pin 3 mA typ. -0.5 to 1.0 mA
Altitude During Operation		2'000 m max.
Switching Frequency		225 - 275 kHz (PWM)
		250 kHz typ. (PWM)
Insulation System		Reinforced Insulation (110 V _{in} models)
		Basic Insulation (other models)

All specifications valid at nominal voltage, full load and +25°C after warm-up time unless otherwise stated.

Isolation Test Voltage	- Input to Output, 60 s	3'000 VAC (110 Vin models) 2'250 VDC (other models)
	- Input to Case, 60 s	1'500 VAC (110 Vin models) 1'600 VDC (other models)
	- Output to Case, 60 s	1'500 VAC
Isolation Resistance	- Input to Output, 500 VDC	1'000 MΩ min.
Isolation Capacitance	- Input to Output, 100 kHz, 1 V	2'500 pF max.
Reliability	- Calculated MTBF	350'000 h (MIL-HDBK-217F, ground benign)
Environment	- Vibration	MIL-STD-810F EN 61373
	- Mechanical Shock	MIL-STD-810F EN 61373
	- Thermal Shock	MIL-STD-810F
Housing Material		Alu base-plate w. plastic case (110 Vin models) Alu base-plate w. metal case (other models)
Base Material		Non-conductive FR4 (UL94 V-0 rated) (24 Vin & 48 Vin models only)
Potting Material		Silicone (UL 94 V-0 rated)
Connection Type		Screw Terminal
Weight		235 g
Thermal Impedance		6.1 K/W
Environmental Compliance	- Reach	www.tracopower.com/info/reach-declaration.pdf
	- RoHS	www.tracopower.com/info/rohs-declaration.pdf
	- Flammability (EN 45545-2)	www.tracopower.com/info/en45545-declaration.pdf


Supporting Documents

Overview Link (for additional Documents)

www.tracopower.com/overview/tep160wircm

All specifications valid at nominal voltage, full load and +25°C after warm-up time unless otherwise stated.

Outline Dimensions

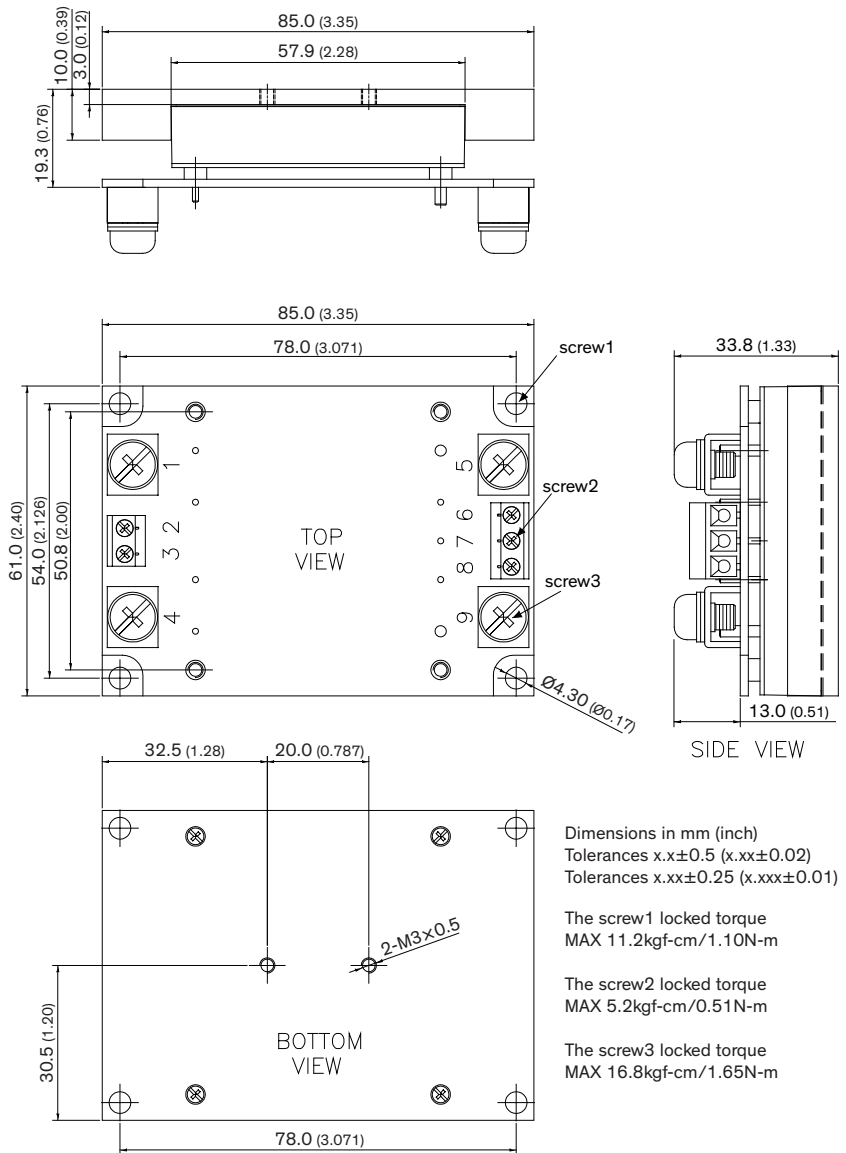

Pinout	
Pin	Function
1	-Vin (GND)
2	NC
3	Remote
4	+Vin (Vcc)
5	-Vout
6	-Sense
7	Trim
8	+Sense
9	+Vout

NC: No Connection