





REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 09/15/05'		LJC 09/15/05'
L	DRAWING UPDATE	JLZ 12/17/18'		

NOTES:
SPECIFICATIONS:
1. CONTACT RESISTANCE: 20mΩ MAX.
2. INSULATION RESISTANCE: 1000MΩ MIN.
3. DIELECTRIC WITHSTANDING VOLTAGE: 600V AC(RMS) FOR 1 MINUTE.
4. CURRENT RATING:3A.
5. VOLTAGE RATING:250V AC RMS.
6. TEMPERATURE: -40°C~+105°C.
MATERIALS:
1. CONTACT MATERIAL: COPPER ALLOY.
2. CONTACT PLATING: GOLD PLATING OVER NICKEL.
3. INSULATOR MATERIALS: PBT,BLACK,UL94-V0.

PRODUCT NUMBER CODE:
THD-xx-R-RA
XX = No. of Positions Per Row
= 01 ~ 40

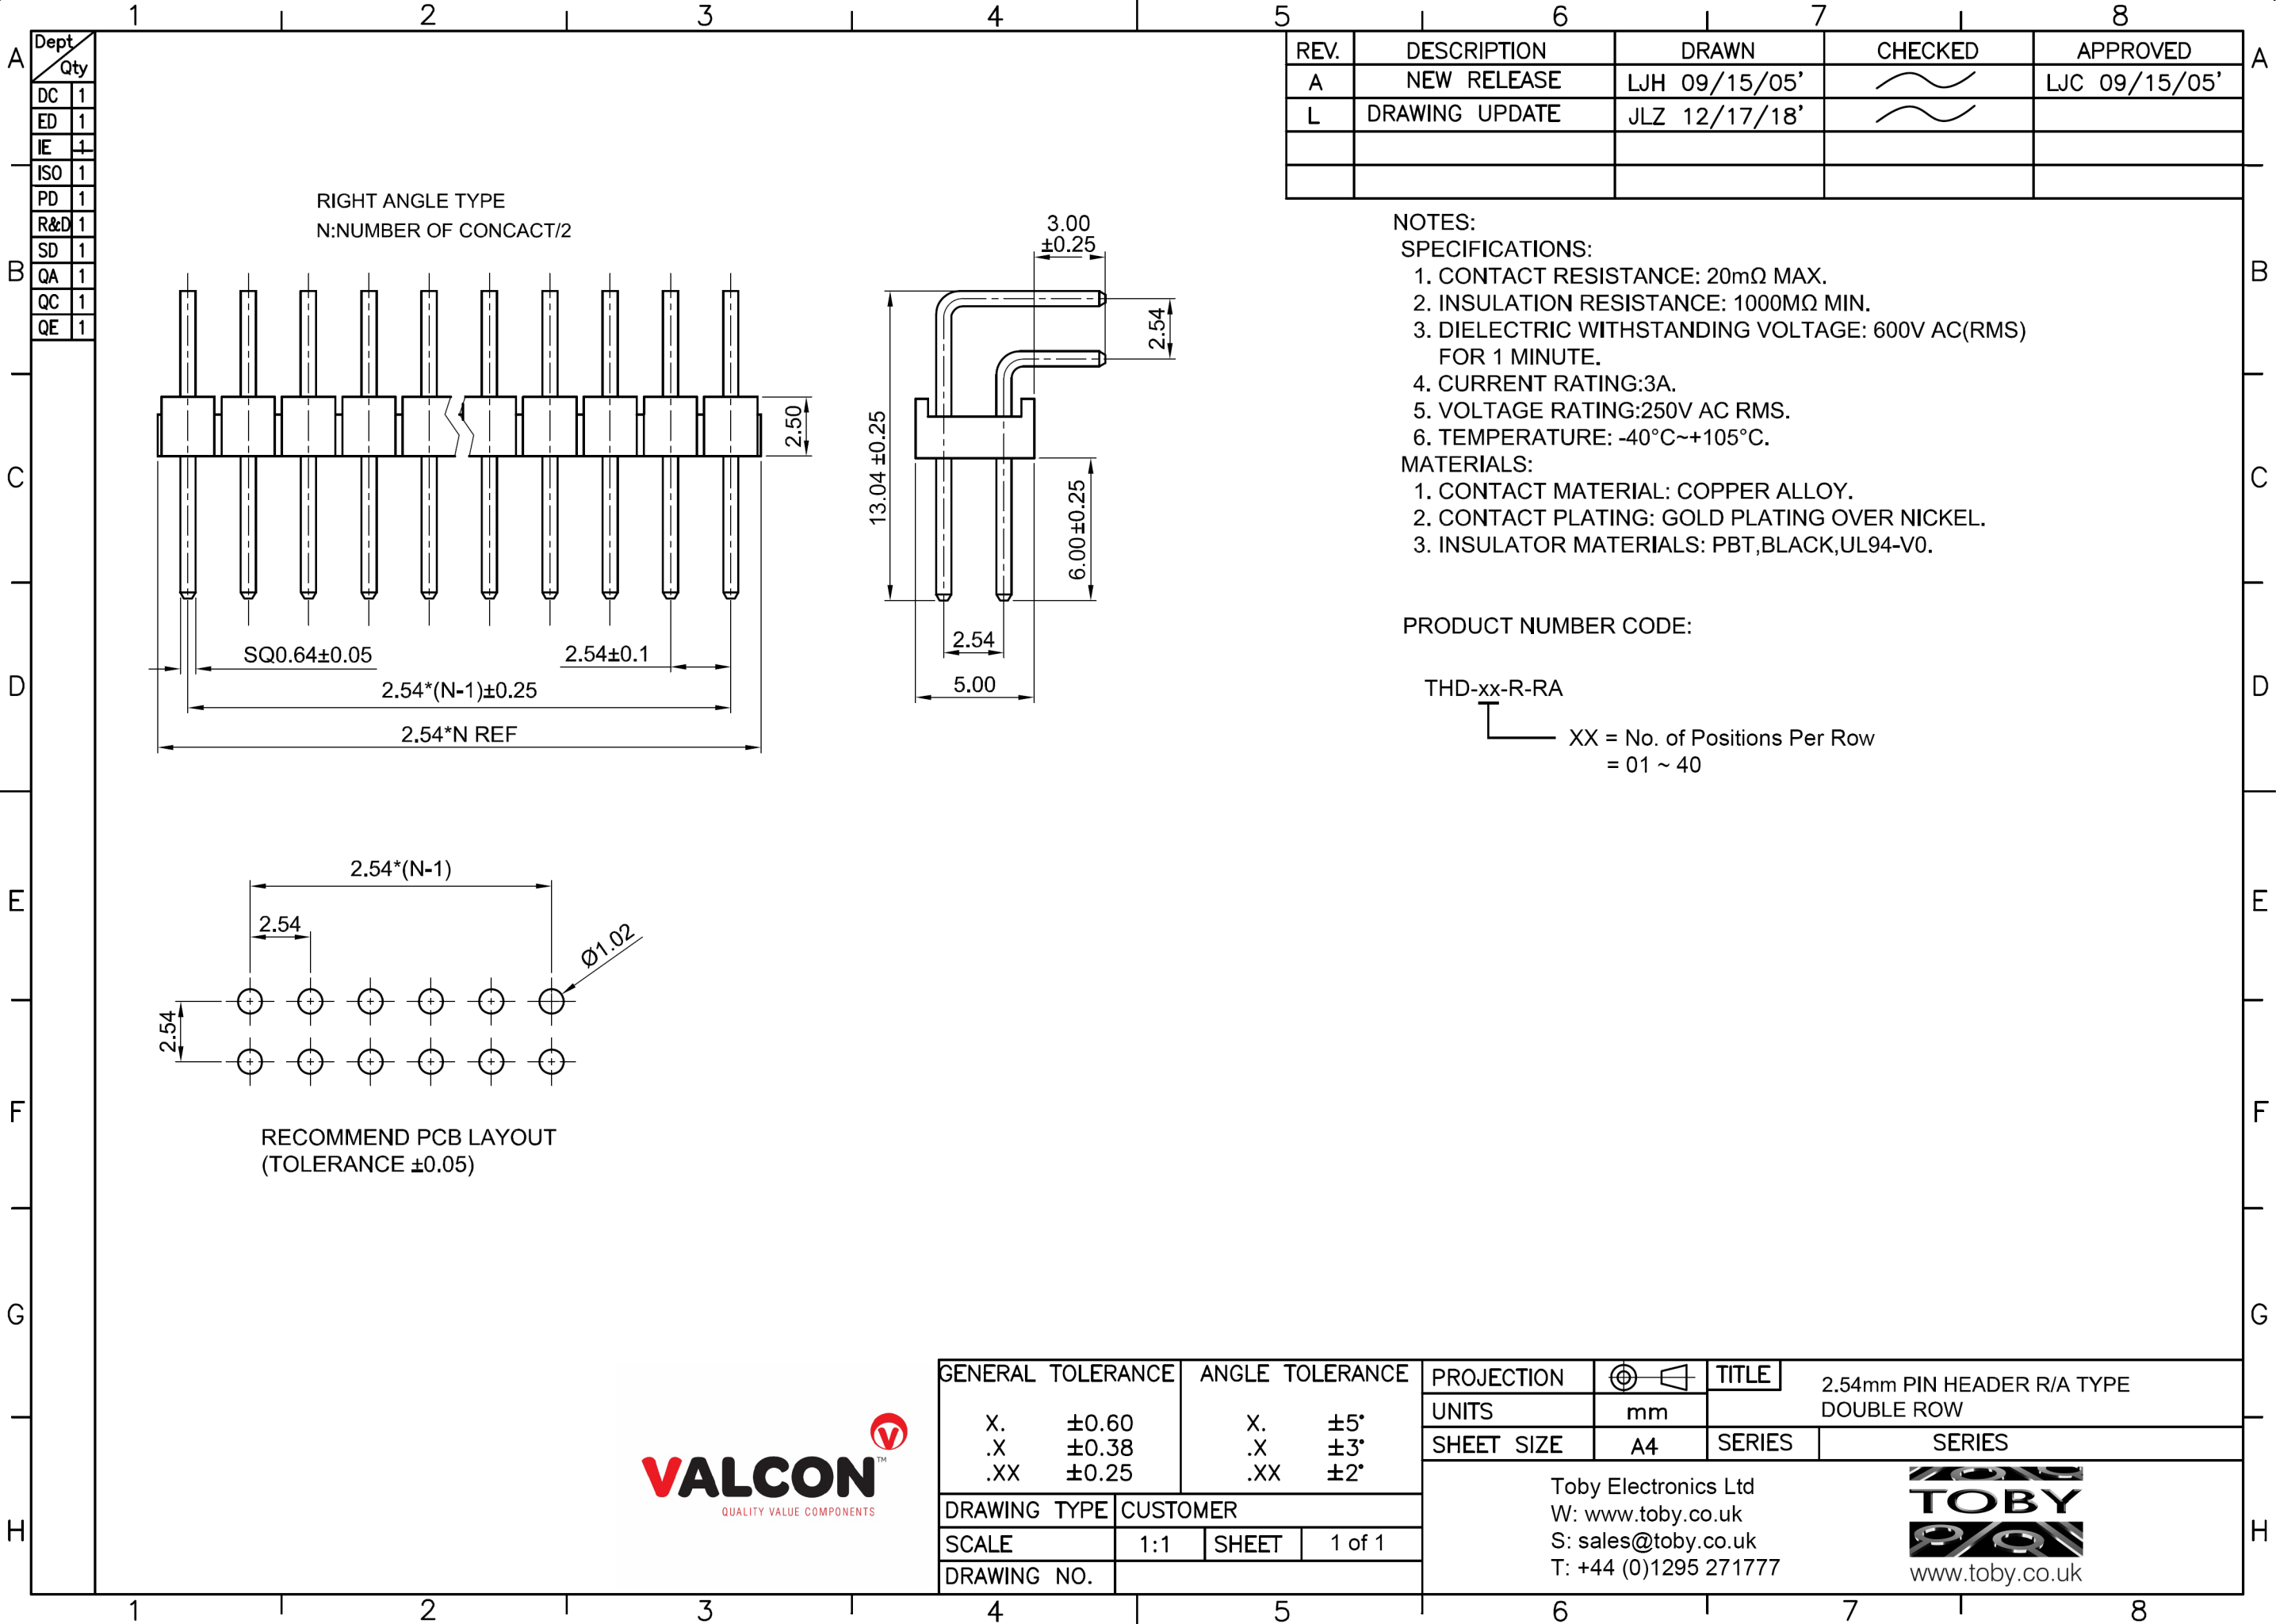

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	2.54mm PIN HEADER R/A TYPE DOUBLE ROW	
X.	±0.60	X.	±5°	UNITS	mm			
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	SERIES	
.XX	±0.25	.XX	±2°	Toby Electronics Ltd W: www.toby.co.uk S: sales@toby.co.uk T: +44 (0)1295 271777  www.toby.co.uk				
DRAWING TYPE		CUSTOMER						
SCALE	1:1	SHEET	1 of 1					
DRAWING NO.								

