



TML-108-02-G-D-SM



TML-120-01-L-D-RA



TML-132-02-L-D-SM

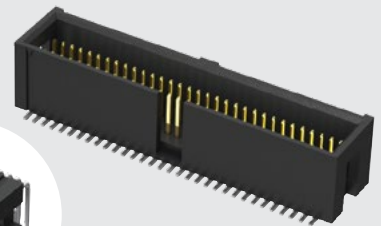

(1.27 mm) .050"

TML SERIES

SHROUDED MICRO HEADER

SPECIFICATIONS

For complete specifications and recommended PCB layouts see www.samtec.com?TML

- Insulator Material:** Black Liquid Crystal Polymer
- Insulation Resistance:** 5000 MΩ min
- Terminal Material:** Phosphor Bronze
- Plating:** Au or Sn over 50 μ" (1.27 μm) Ni
- Operating Temp Range:** -55 °C to +105 °C with Tin; -55 °C to +125 °C with Gold
- RoHS Compliant:** Yes

PROCESSING

- Lead-Free Solderable:** Yes
- SMT Lead Coplanarity:** (0.15 mm) .006" max*
*(.004" stencil solution may be available; contact IPG@samtec.com)

RECOGNITIONS

For complete scope of recognitions see www.samtec.com/quality





ALSO AVAILABLE (MOQ Required)


- Other sizes
 - Other platings
- Contact Samtec.

Mates with:
SMS, RSM




APPLICATIONS

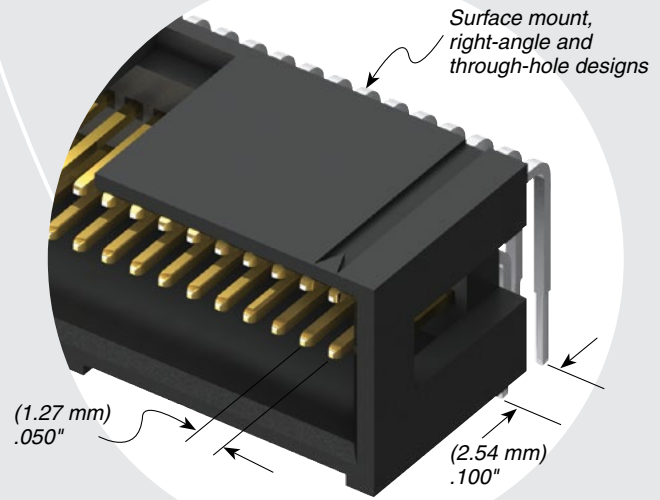

TML	1	NO. PINS PER ROW	LEAD STYLE	PLATING OPTION	D	TAIL OPTION	OTHER OPTION
			Specify LEAD STYLE from chart	<ul style="list-style-type: none"> -L = 10 μ" (0.25 μm) Gold on post, Matte Tin on tail -G = 10 μ" (0.25 μm) Gold on post, Gold flash on tail 		<ul style="list-style-type: none"> -RA = Right-angle -SM = Surface Mount (For locking clip add -LC) 	<ul style="list-style-type: none"> - "XXX" = Polarized position (Specify position of omitted pin)

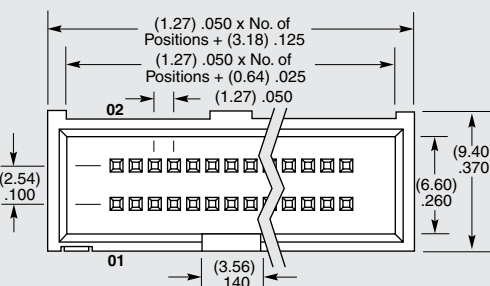

LEAD STYLE	POST HEIGHT (A)
-01	(3.05) .120
-02	(5.84) .230
-03	(4.32) .170

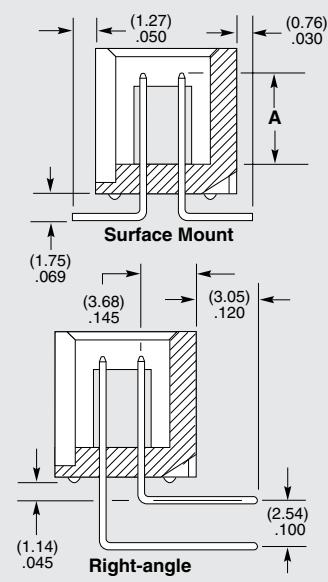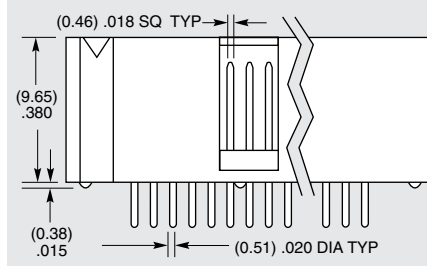

Note: Some sizes, styles and options are non-standard, non-returnable.

Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM

All parts within this catalog are built to Samtec's specifications. Customer specific requirements must be approved by Samtec and identified in a Samtec customer-specific drawing to apply.