

2.54mm Pitch Vertical Single and Dual Row Through Board Custom Length PCB Headers


VMHR-PX40-CCC-AAA-BBB SERIES

2.54mm Pitch Custom Pin Headers from 7.5mm to 36.5mm Overall Lengths

Gold Flash Plated Pins

1x40 & 2x40 Positions As Standard

Can Be Modified and Cut To Size

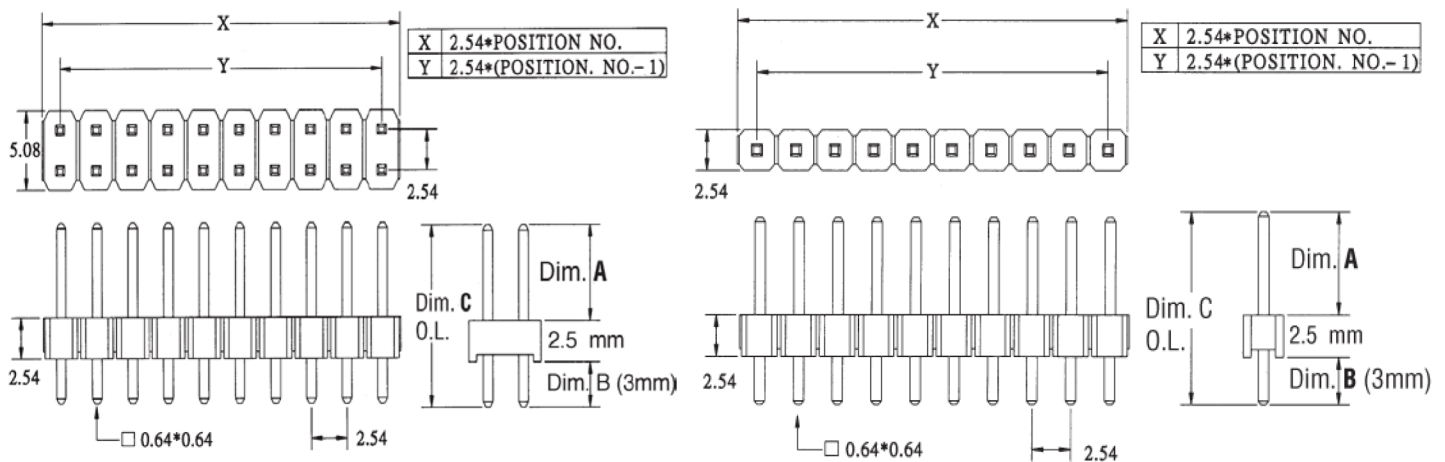

Ordering Information for VMHR-PX40-CCC-AAA-BBB

VMHR-PX40-CCC-AAA-BBB

1 2 3 4 5

OPTION 1 (R) **S**=Single Row or **D**=Dual Row

OPTION 2 (P) **1**=1x40 Positions or **2**=2x40 Positions

OPTION 3 (CCC) Overall Pin Length from 7.5mm (075) to 36.5mm (365) =DIM. C

OPTION 4 (AAA) Contact Pin Length in Increments of 0.5mm (i.e. 020 = 2mm) =DIM. A

OPTION 5 (BBB) 3mm Solder Tail Length (Standard Other lengths available on request) = DIM. B

Example Part: VMHS-1x40-085-030-030 single row, 40 pos. 8.5mm overall pin length, 3mm contact, 3mm solder tail

Please note: Some lengths, styles & options are non-standard, non-returnable and may be subject to minimum order quantities.

Specification for VMH Series

Contact Material:	Copper Alloy
Contact Plating:	Gold Flash
Body:	Thermoplastic UL94V-0
Contact Resistance:	20mΩ Max.
DWV:	500V AC(rms) for 1 Minute.
Insulation Resistance:	1000MΩ Min.
Temperature Range:	-40°C ~ +105°C