
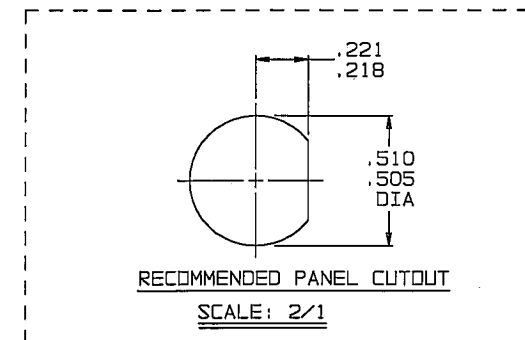
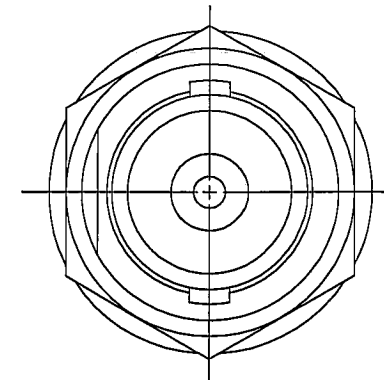


RED INDICATES ORIGINAL

DATA CONTAINED IN THIS DOCUMENT IS
PROPRIETARY TO TROMPETER ELECTRONICS INC.
AND SHALL NOT BE DISCLOSED, COPIED OR USED
FOR PROCUREMENT OR MANUFACTURE WITHOUT
EXPRESS WRITTEN PERMISSION.

DASH NO	MODEL NO	IMPD OHMS
-1	BJ28	50
-2	UBJ28	75

INCH	MM
.005	0.13
.030	0.76
.046	1.17
.156	3.96
.218	5.54
.221	5.61
.380	9.65
.505	12.83
.510	12.95
.562	14.27
1.280	32.51

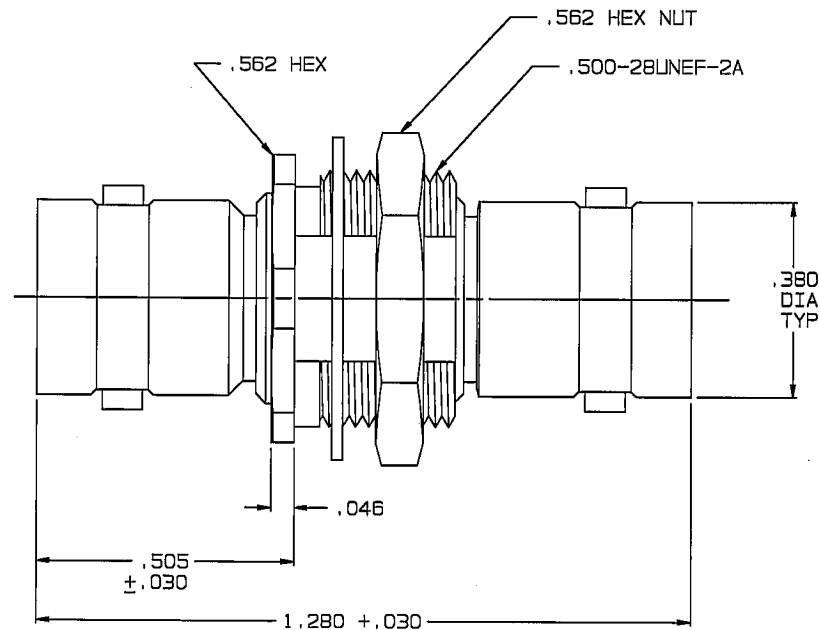

4. SOCKET CONTACT COAXIAL BNC TYPE
INSULATED FEED THRU BULKHEAD
JACK, 50 AND 75 OHM VERSIONS

3. MAX PANEL THK .156

2. FINISH: TFS-1A, (NICKEL)

1. ALL DIM ARE IN INCHES

REVISONS			1-0133	SH 1C
REV	EO	DESCRIPTION	DWN	APPROVED
T	13282	CHANGED NOTE 3 ON SHEET 2: 8 IN/LB TORQUE WAS 12 IN/LB TORQUE; SEE ECO	DKC	3/7/00

QTY		DESCRIPTION			PART NUMBER		ITEM
TOL UNLESS SPECIFIED		TROMPETER ELECTRONICS, INC.			BJ28/UBJ28		
.XX ±							
.XXX ± .005							
.XXXX ±							
ANGLE ±							
105-1043	DWN	DKC	2-29-00	MATERIAL	CODE IDENT	DRAWING NO.	REV
155-0574	CHK	3-7-66		—	14949	1-0133	T
155-0538	ENG						
155-0512	APPR	3-7-66		SCALE 4/1	DATE 9/15/66	SHEET 1C	
NEXT ASSY							

TROMPETER
ELECTRONICS, INC.

BJ28/UBJ28

CODE IDENT
14949

DRAWING NO.
1-0133

REV
T