


**KEMET Part Number: UD2-5NUN-L**  
(USRUD20500NUNL)

KEMET, UD2, Relays, Signal

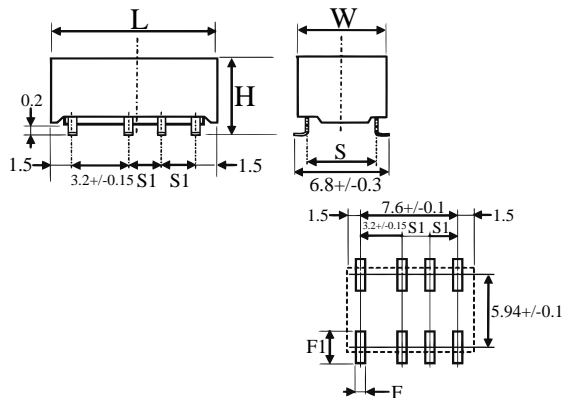

**Dimensions**

<b>L</b>	10.6mm +/-0.3mm
<b>W</b>	6.5mm +/-0.3mm
<b>H</b>	6mm MAX
<b>S</b>	5.08mm +/-0.15mm
<b>S1</b>	2.2mm +/-0.15mm
<b>F</b>	0.8mm +/-0.1mm
<b>F1</b>	2.66mm +/-0.1mm

**Packaging Specifications**

<b>Packaging:</b>	T&R
-------------------	-----

**General Information**

<b>Series:</b>	UD2
<b>Style:</b>	SMD
<b>Description:</b>	Miniature Signal Relay, Non-latch
<b>Features:</b>	Super-Compact Size, Flat-Package
<b>RoHS:</b>	Yes
<b>Coil Type:</b>	Single Coil (Non-Latching)

**Specifications**

<b>Temperature Range:</b>	-40/+85°C
<b>Coil Voltage:</b>	5 V
<b>Coil Resistance:</b>	178 Ohms +/-10%
<b>Contact Form:</b>	2 Form C (DPDT)
<b>Contact Material:</b>	Silver Alloy With Gold Alloy Overlay
<b>Voltage Characteristics:</b>	3.75 (Operate) / 0.5 (Release)
<b>Switching Power:</b>	30 W, 37.5 VA
<b>Switching Voltage DC:</b>	220 V
<b>Switching Voltage AC:</b>	250 VAC
<b>Switching Current:</b>	1 A
<b>Contact Current Class:</b>	>10A
<b>Carrying Current:</b>	1 Amps
<b>Contact Resistance:</b>	100 mOhms
<b>Operation Time:</b>	Approximately 2ms
<b>Release Time:</b>	Approximately 1ms
<b>Insulation Resistance:</b>	1 GOhms
<b>Withstanding Voltage:</b>	1000 VAC (1min) 1500 V Surge