


## Axial Leaded Ceramic Capacitors

## UP050F104Z-A-BZ

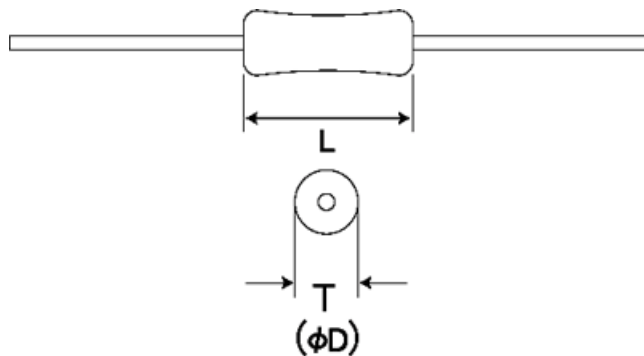

## ■ Features

- Item Summary  
50V, 0.1  $\mu$ F, -20% to 80%, Axial
- Lifecycle Stage  
Mass Production
- Standard packaging quantity (minimum)  
Taping 3000pcs

## ■ Products characteristics table

External Dimensions (EIA/JIS)	Axial/Axial
Rated Voltage (max)	50V
Capacitance	0.1 $\mu$ F
Capacitance Tolerance	-20% to 80%
Resistance	1,000 M $\Omega$ min.
Dielectric Loss Tangent	7.5%MAX
Temperature Characteristics (EIA/JIS)	-/F
Temperature Range (EIA/JIS)	-/-25 to +85 $^{\circ}$ C
Capacitance Change (EIA/JIS)	-/-80,+30%
RoHS Compliance	Yes
Soldering Method	Wave

## ■ External Dimensions

L	3.2mm -
D	2.2mm max

2013.02.23

The data is reference only. Electrical characteristics vary depending on environment or measurement condition.  
 TAIYO YUDEN reserves the right to make change to the Date at any time without notice.  
 Before making final selection, please check product specification.