


USBC-AM-BM-B-S-2

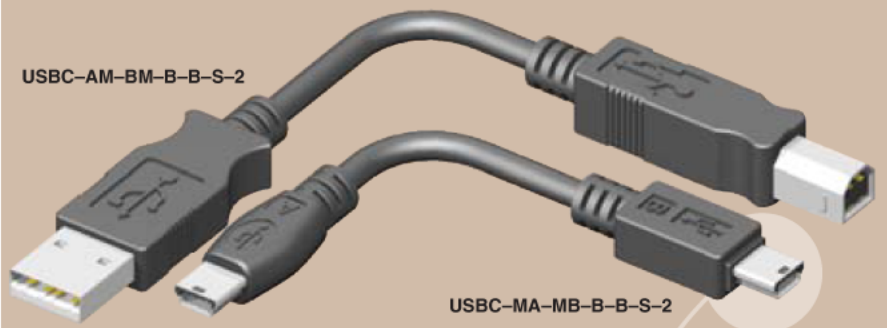

USBC-MA-MB-B-S-2

USBC SERIES



USB 2.0 CABLE PLUGS

SPECIFICATIONS

For complete specifications see www.samtec.com?USBC

- Insulator Material:** Glass Filled Thermoplastic
- Contact Material:** Copper Alloy
- Shell Material:** Cold Rolled Steel ((0,30mm) .012" thickness)
- Plating:** Gold on Contacts, Nickel on Shell, Tin on Tails
- Operating Temp Range:** 0°C to +50°C
- Current Rating:** 1.0A per contact
- Voltage Rating:** 30 VAC (R.M.S.)
- Contact Resistance:** 30 mΩ max
- Minimum Cycles:** 5000
- RoHS Compliant:** Yes

Mates with:
MUSB, USB,
USBR, SPM

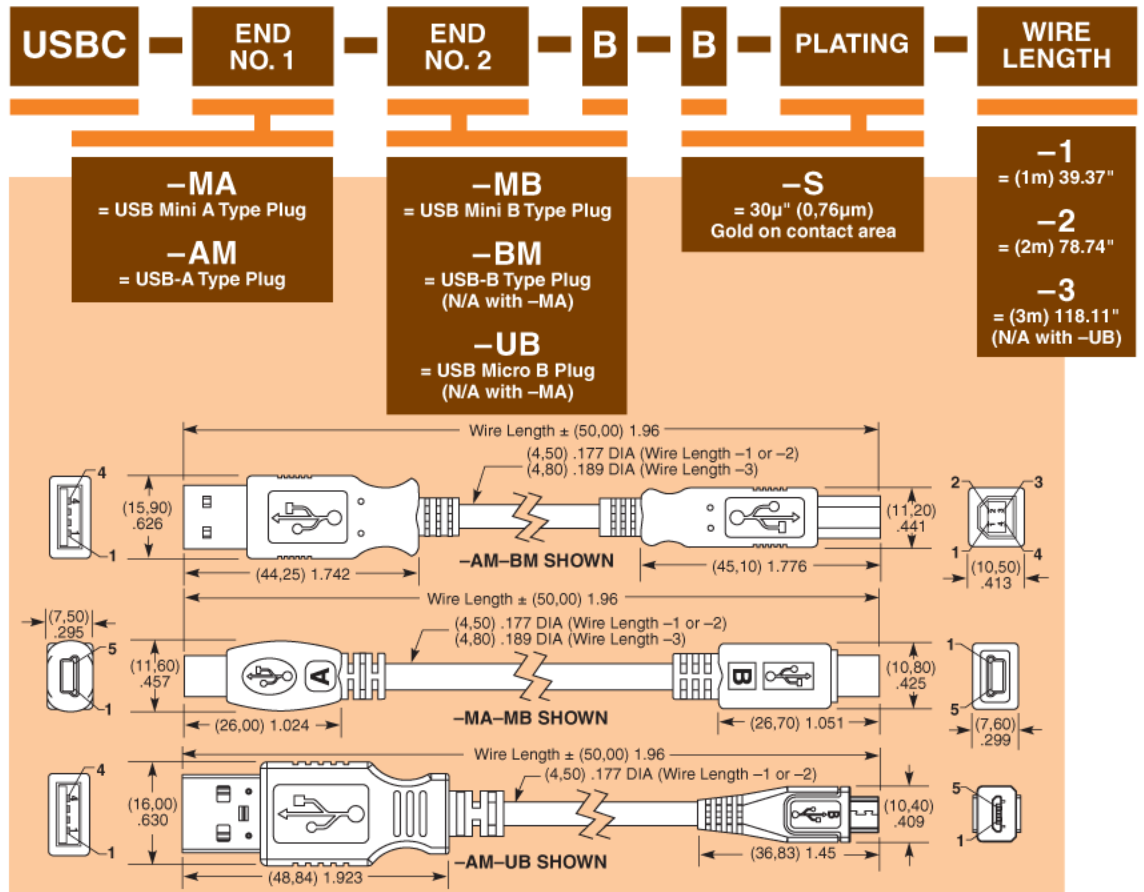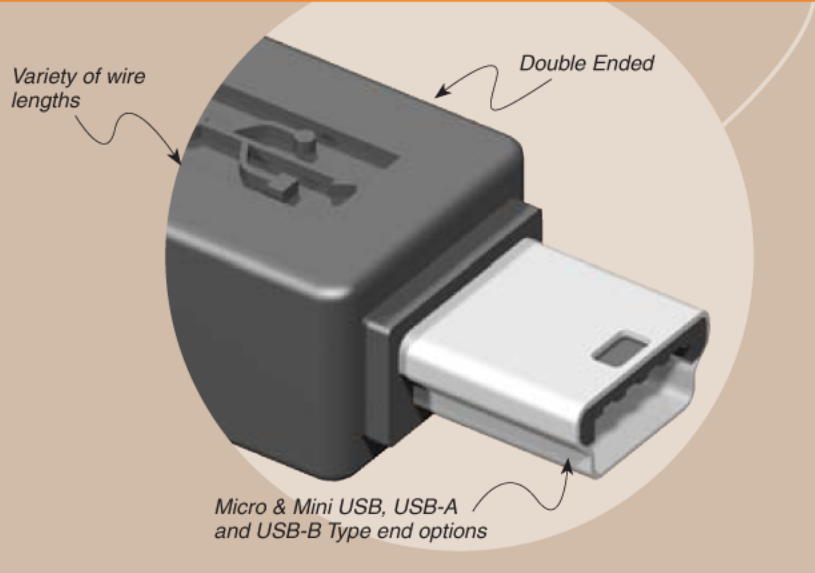

Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM