

Helping Customers Innovate, Improve & Grow



VC-801

## Description

Vectron's VC-801 Crystal Oscillator (XO) is a quartz stabilized square wave generator with a CMOS output. The VC-801 uses fundamental or 3rd overtone crystals resulting in very low jitter performance, and a monolithic IC which improves reliability and reduces cost.


### Features

- CMOS output XO
- Output Frequencies from 32.768kHz to 125.000MHz
- 5.0, 3.3, 2.5 or 1.8 V Operation
- Low Jitter Performance
- Output Disable Feature
- $\pm 20$ ppm Frequency Stability Available
- Operating Temperature ranging from  $-55^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$
- Small Industry Standard Package, 5.0 x 3.2 x 1.3 mm
- Product is compliant to RoHS directive  and fully compatible with lead free assembly

### Applications

- SONET/SDH/DWDM
- Ethernet, GE, SynchE
- Storage Area Networking
- Fiber Channel
- Digital Video
- Broadband Access
- Base Stations, Picocells

## Block Diagram

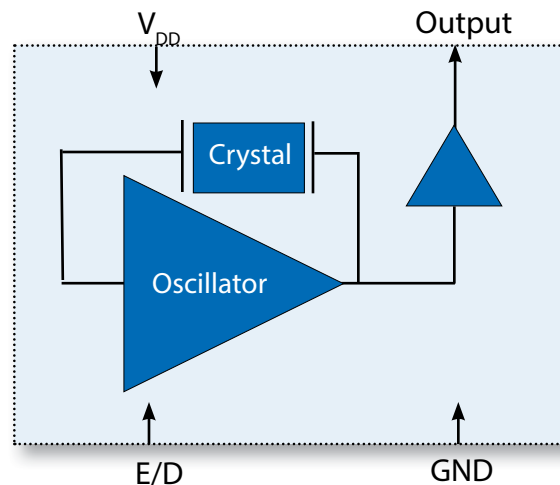


# Specifications


**Table 1. Electrical Performance, 5V Option**

| Parameter                                                                                                                      | Symbol                                                                   | Min                                                        | Typical   | Max                 | Units              |
|--------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------|------------------------------------------------------------|-----------|---------------------|--------------------|
| Supply Voltage                                                                                                                 |                                                                          |                                                            |           |                     |                    |
| Voltage <sup>1</sup>                                                                                                           | V <sub>DD</sub>                                                          | 4.5                                                        | 5.0       | 5.5                 | V                  |
| Max Voltage                                                                                                                    |                                                                          | -0.7                                                       |           | 7                   | V                  |
| Current <sup>2</sup><br>≤20.000MHz<br>20.001 to 50.000MHz<br>50.001 to 75.000MHz                                               | I <sub>DD</sub>                                                          |                                                            |           | 10<br>30<br>40      | mA<br>mA<br>mA     |
| Current, Output Disabled                                                                                                       |                                                                          |                                                            |           | 30                  | uA                 |
| Frequency                                                                                                                      |                                                                          |                                                            |           |                     |                    |
| Nominal Frequency <sup>3</sup>                                                                                                 | f <sub>N</sub>                                                           | 1.544                                                      |           | 75.000              | MHz                |
| Stability <sup>4,8</sup> (Ordering Option)                                                                                     |                                                                          | ±20, ±25, ±32, ±50, ±100                                   |           |                     | ppm                |
| Output                                                                                                                         |                                                                          |                                                            |           |                     |                    |
| Output Logic Levels <sup>2</sup><br>Output Logic High<br>Output Logic Low<br>Output Logic High Drive<br>Output Logic Low Drive | V <sub>OH</sub><br>V <sub>OL</sub><br>I <sub>OH</sub><br>I <sub>OL</sub> | 0.9*V <sub>DD</sub><br><br>16<br>16                        |           | 0.1*V <sub>DD</sub> | V<br>V<br>mA<br>mA |
| Load                                                                                                                           |                                                                          |                                                            |           | 15                  | pF                 |
| Output Rise /Fall Time <sup>2</sup><br><20.000MHz<br>20.000 to 50.000MHz<br>50.001 to 75.000MHz                                | t <sub>R</sub> /t <sub>F</sub>                                           |                                                            |           | 8<br>5<br>2         | ns<br>ns<br>ns     |
| Output Leakage, Output Disabled                                                                                                | I <sub>Z</sub>                                                           |                                                            |           | ±10                 | uA                 |
| Duty Cycle <sup>2,5</sup>                                                                                                      |                                                                          | 45                                                         | 50        | 55                  | %                  |
| Period Jitter <sup>6</sup><br>RMS<br>Peak-Peak                                                                                 | ϕJ                                                                       |                                                            | 3.0<br>21 |                     | ps<br>ps           |
| RMS Jitter, 12kHz-20MHz                                                                                                        | ϕJ                                                                       |                                                            | 0.5       | 1                   | ps                 |
| Enable/Disable                                                                                                                 |                                                                          |                                                            |           |                     |                    |
| Output Enable/Disable <sup>7</sup><br>Output Enable<br>Output Disable                                                          | V <sub>IH</sub><br>V <sub>IL</sub>                                       | 4.0                                                        |           | 0.8                 | V<br>V             |
| Disable time                                                                                                                   | t <sub>D</sub>                                                           |                                                            |           | 100                 | ns                 |
| Enable Internal Pull-Up Resistor                                                                                               |                                                                          |                                                            | 100       |                     | Kohm               |
| Start-Up Time                                                                                                                  | t <sub>SU</sub>                                                          |                                                            |           | 8                   | ms                 |
| Operating Temp (Ordering Option)                                                                                               | T <sub>OP</sub>                                                          | -10/70, -20/70, -40/85, -40/105, -40/125, -55/105, -55/125 |           |                     | °C                 |

- 1] The power supply should have by-pass capacitors as close to the supply and to ground as possible, for example 0.1 and 0.01uF.
- 2] Parameters are tested with the test circuit shown in Fig 1.
- 3] See Standard Frequencies and Ordering Information tables for more specific information.
- 4] Includes initial accuracy, operating temperature, supply voltage, shock and vibration (not under operation) and aging for ±50 and ±100ppm options.
- 5] Duty Cycle is measured as On Time/Period, see Fig 2.
- 6] Broadband Period Jitter measured using Wavecrest SIA3300C, 90K samples, see Application Note for Typical Phase Noise and Jitter Performance.
- 7] The Output is Enabled if the Enable/Disable is left open.
- 8] Only ±50 and ±100 stability option available for -40/105 °C, -40/125 °C, -55/105 °C and -55/125 °C Operating temperature range.

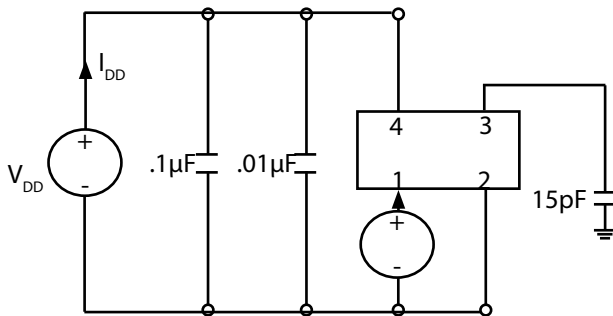

**Fig 1: Test Circuit**

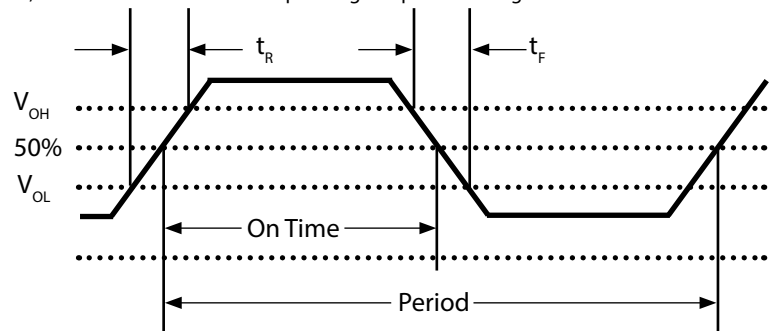

**Fig 2: Waveform**

# Specifications

**Table 2. Electrical Performance, 3.3V Option**

| Parameter                                                                                                                                                   | Symbol                                                                   | Min                                                        | Typical   | Max                      | Units                      |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------|------------------------------------------------------------|-----------|--------------------------|----------------------------|
| Supply Voltage                                                                                                                                              |                                                                          |                                                            |           |                          |                            |
| Voltage <sup>1</sup>                                                                                                                                        | V <sub>DD</sub>                                                          | 2.97                                                       | 3.30      | 3.63                     | V                          |
| Max Voltage                                                                                                                                                 |                                                                          | -0.5                                                       |           | 5.0                      | V                          |
| Current <sup>2</sup><br>32.768kHz to 1.499MHz<br>1.500 to 20.000 MHz<br>20.001 to 50.000MHz<br>50.001 to 100.000MHz<br>100.001 to 125.000MHz                | I <sub>DD</sub>                                                          |                                                            |           | 5<br>7<br>20<br>30<br>40 | mA<br>mA<br>mA<br>mA<br>mA |
| Current, Output Disabled                                                                                                                                    |                                                                          |                                                            |           | 30                       | uA                         |
| Frequency                                                                                                                                                   |                                                                          |                                                            |           |                          |                            |
| Nominal Frequency <sup>3</sup>                                                                                                                              | f <sub>N</sub>                                                           | 0.032                                                      |           | 125.000                  | MHz                        |
| Stability <sup>4,8</sup> (Ordering Option)                                                                                                                  |                                                                          | ±20, ±25, ±32, ±50, ±100                                   |           |                          | ppm                        |
| Output                                                                                                                                                      |                                                                          |                                                            |           |                          |                            |
| Output Logic Levels <sup>2</sup><br>Output Logic High<br>Output Logic Low<br>Output Logic High Drive<br>Output Logic Low Drive                              | V <sub>OH</sub><br>V <sub>OL</sub><br>I <sub>OH</sub><br>I <sub>OL</sub> | 0.9*V <sub>DD</sub><br><br>8<br>8                          |           | 0.1*V <sub>DD</sub>      | V<br>V<br>mA<br>mA         |
| Load                                                                                                                                                        |                                                                          |                                                            |           | 15                       | pF                         |
| Output Rise /Fall Time <sup>2</sup><br>32.768kHz to 345.6kHz<br>345.6kHz to 20.000MHz<br>20.001 to 50.000MHz<br>50.001 to 75.000MHz<br>75.001 to 125.000MHz | t <sub>R</sub> /t <sub>F</sub>                                           |                                                            |           | 200<br>6<br>4<br>3<br>2  | ns<br>ns<br>ns<br>ns<br>ns |
| Output Leakage, Output Disabled                                                                                                                             | I <sub>Z</sub>                                                           |                                                            |           | ±10                      | uA                         |
| Duty Cycle <sup>2,5</sup>                                                                                                                                   |                                                                          | 45                                                         | 50        | 55                       | %                          |
| Period Jitter <sup>6</sup><br>RMS<br>Peak-Peak                                                                                                              | ϕJ                                                                       |                                                            | 3.0<br>21 |                          | ps<br>ps                   |
| RMS Jitter, 12kHz-20MHz                                                                                                                                     | ϕJ                                                                       |                                                            | 0.5       | 1                        | ps                         |
| Enable/Disable                                                                                                                                              |                                                                          |                                                            |           |                          |                            |
| Output Enable/Disable <sup>7</sup><br>Output Enable<br>Output Disable                                                                                       | V <sub>IH</sub><br>V <sub>IL</sub>                                       | 2.0                                                        |           | 0.5                      | V<br>V                     |
| Disable time                                                                                                                                                | t <sub>D</sub>                                                           |                                                            |           | 100                      | ns                         |
| Enable Internal Pull-Up Resistor                                                                                                                            |                                                                          |                                                            | 100       |                          | Kohm                       |
| Start-Up Time                                                                                                                                               | t <sub>SU</sub>                                                          |                                                            |           | 8                        | ms                         |
| Operating Temp (Ordering Option)                                                                                                                            | T <sub>OP</sub>                                                          | -10/70, -20/70, -40/85, -40/105, -40/125, -55/105, -55/125 |           |                          | °C                         |

1] The power supply should have by-pass capacitors as close to the supply and to ground as possible, for example 0.1 and 0.01uF.

2] Parameters are tested with the test circuit shown in Fig 1.

3] See Standard Frequencies and Ordering Information tables for more specific information.

4] Includes initial accuracy, operating temperature, supply voltage, shock and vibration (not under operation) and aging for  $\pm 50$  and  $\pm 100$ ppm options.

5] Duty Cycle is measured as On Time/Period, see Fig 2.

6] Broadband Period Jitter measured using Wavecrest SIA3300C, 90K samples, see Application Note for Typical Phase Noise and Jitter Performance.

7] The Output is Enabled if the Enable/Disable is left open.

8] Only  $\pm 50$  and  $\pm 100$  stability option available for -40/105 °C, -40/125 °C, -55/105 °C and -55/125 °C Operating temperature range.

# Specifications

**Table 3. Electrical Performance, 2.5V Option**

| Parameter                                                                                                                                                                                                     | Symbol                                                                                                         | Min                                                        | Typical   | Max                            | Units                            |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------|------------------------------------------------------------|-----------|--------------------------------|----------------------------------|
| Supply Voltage                                                                                                                                                                                                |                                                                                                                |                                                            |           |                                |                                  |
| Voltage <sup>1</sup>                                                                                                                                                                                          | V <sub>DD</sub>                                                                                                | 2.25                                                       | 2.50      | 2.75                           | V                                |
| Max Voltage                                                                                                                                                                                                   |                                                                                                                | -0.5                                                       |           | 5.0                            | V                                |
| Current <sup>2</sup><br>32.768kHz to 1.499MHz<br>1.500 to 20.000 MHz<br>20.001 to 50.000MHz<br>50.001 to 75.000MHz<br>75.001 to 100.000MHz<br>100.001 to 125.000MHz                                           | I <sub>DD</sub>                                                                                                |                                                            |           | 5<br>7<br>15<br>20<br>25<br>30 | mA<br>mA<br>mA<br>mA<br>mA<br>mA |
| Current, Output Disabled                                                                                                                                                                                      |                                                                                                                |                                                            |           | 30                             | uA                               |
| Frequency                                                                                                                                                                                                     |                                                                                                                |                                                            |           |                                |                                  |
| Nominal Frequency <sup>3</sup>                                                                                                                                                                                | f <sub>N</sub>                                                                                                 | 0.032                                                      |           | 125.000                        | MHz                              |
| Stability <sup>4,9</sup> (Ordering Option)                                                                                                                                                                    |                                                                                                                | ±20, ±25, ±32, ±50, ±100                                   |           |                                | ppm                              |
| Output                                                                                                                                                                                                        |                                                                                                                |                                                            |           |                                |                                  |
| Output Logic Levels <sup>2</sup><br>Output Logic High<br>Output Logic Low<br>Output Logic High Drive<br>Output Logic Low Drive<br>Output Logic High Drive <sup>8</sup><br>Output Logic Low Drive <sup>8</sup> | V <sub>OH</sub><br>V <sub>OL</sub><br>I <sub>OH</sub><br>I <sub>OL</sub><br>I <sub>OH</sub><br>I <sub>OL</sub> | 0.9*V <sub>DD</sub><br><br>4<br>4<br>8<br>8                |           | 0.1*V <sub>DD</sub>            | V<br>V<br>mA<br>mA<br>mA<br>mA   |
| Load                                                                                                                                                                                                          | I <sub>OUT</sub>                                                                                               |                                                            |           | 15                             | pF                               |
| Output Rise /Fall Time <sup>2</sup><br>32.768kHz to 345.6kHz<br>345.6kHz to 20.000MHz<br>20.001 to 50.000MHz<br>50.001 to 75.000MHz<br>75.001 to 125.000MHz                                                   | t <sub>R</sub> /t <sub>F</sub>                                                                                 |                                                            |           | 200<br>6<br>5<br>3<br>2        | ns<br>ns<br>ns<br>ns<br>ns       |
| Output Leakage, Output Disabled                                                                                                                                                                               | I <sub>Z</sub>                                                                                                 |                                                            |           | ±10                            | uA                               |
| Duty Cycle <sup>2,5</sup>                                                                                                                                                                                     |                                                                                                                | 45                                                         | 50        | 55                             | %                                |
| Period Jitter <sup>6</sup><br>RMS<br>Peak-Peak                                                                                                                                                                | φJ                                                                                                             |                                                            | 3.0<br>21 |                                | ps<br>ps                         |
| RMS Jitter, 12kHz-20MHz                                                                                                                                                                                       | φJ                                                                                                             |                                                            | 0.5       | 1                              | ps                               |
| Enable/Disable                                                                                                                                                                                                |                                                                                                                |                                                            |           |                                |                                  |
| Output Enable/Disable <sup>7</sup><br>Output Enable<br>Output Disable                                                                                                                                         | V <sub>IH</sub><br>V <sub>IL</sub>                                                                             | 1.75                                                       |           | 0.5                            | V<br>V                           |
| Disable time                                                                                                                                                                                                  | t <sub>D</sub>                                                                                                 |                                                            |           | 100                            | ns                               |
| Enable Internal Pull-Up Resistor                                                                                                                                                                              |                                                                                                                |                                                            | 100       |                                | Kohm                             |
| Start-Up Time                                                                                                                                                                                                 | t <sub>SU</sub>                                                                                                |                                                            |           | 8                              | ms                               |
| Operating Temp (Ordering Option)                                                                                                                                                                              | T <sub>OP</sub>                                                                                                | -10/70, -20/70, -40/85, -40/105, -40/125, -55/105, -55/125 |           |                                | °C                               |

1] The power supply should have by-pass capacitors as close to the supply and to ground as possible, for example 0.1 and 0.01uF.

2] Parameters are tested with the test circuit shown in Fig 1.

3] See Standard Frequencies and Ordering Information tables for more specific information.

4] Includes initial accuracy, operating temperature, supply voltage, shock and vibration (not under operation) and aging for  $\pm 50$  and  $\pm 100$ ppm options.

5] Duty Cycle is measured as On Time/Period, see Fig 2.

6] Broadband Period Jitter measured using Wavecrest SIA3300C, 90K samples, see Application Note for Typical Phase Noise and Jitter Performance.

7] The Output is Enabled if the Enable/Disable is left open.

8] For 3rd overtone crystal designs.

9] Only  $\pm 50$  and  $\pm 100$  stability option available for -40/105 °C, -40/125 °C, -55/105 °C and -55/125 °C Operating temperature range.

**Table 4. Electrical Performance, 1.8V Option**

| Parameter                                                                                                                                                                                                     | Symbol                                                                                                         | Min                                                        | Typical   | Max                 | Units                          |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------|------------------------------------------------------------|-----------|---------------------|--------------------------------|
| Supply Voltage                                                                                                                                                                                                |                                                                                                                |                                                            |           |                     |                                |
| Voltage <sup>1</sup>                                                                                                                                                                                          | V <sub>DD</sub>                                                                                                | 1.71                                                       | 1.80      | 1.89                | V                              |
| Max Voltage                                                                                                                                                                                                   |                                                                                                                | -0.5                                                       |           | 3.6                 | V                              |
| Current <sup>2</sup><br>1.544 to 20.000 MHz<br>20.001 to 70.000MHz<br>70.001 to 100.000MHz<br>100.001 to 125.000MHz                                                                                           | I <sub>DD</sub>                                                                                                |                                                            |           | 5<br>15<br>20<br>25 | mA<br>mA<br>mA<br>mA           |
| Current, Output Disabled                                                                                                                                                                                      |                                                                                                                |                                                            |           | 30                  | uA                             |
| Frequency                                                                                                                                                                                                     |                                                                                                                |                                                            |           |                     |                                |
| Nominal Frequency <sup>3</sup>                                                                                                                                                                                | f <sub>N</sub>                                                                                                 | 1.544                                                      |           | 125.000             | MHz                            |
| Stability <sup>4,9</sup> (Ordering Option)                                                                                                                                                                    |                                                                                                                | ±20, ±25, ±32, ±50, ±100                                   |           |                     | ppm                            |
| Output                                                                                                                                                                                                        |                                                                                                                |                                                            |           |                     |                                |
| Output Logic Levels <sup>2</sup><br>Output Logic High<br>Output Logic Low<br>Output Logic High Drive<br>Output Logic Low Drive<br>Output Logic High Drive <sup>8</sup><br>Output Logic Low Drive <sup>8</sup> | V <sub>OH</sub><br>V <sub>OL</sub><br>I <sub>OH</sub><br>I <sub>OL</sub><br>I <sub>OH</sub><br>I <sub>OL</sub> | 0.9*V <sub>DD</sub><br><br>2.8<br>2.8<br>8<br>8            |           | 0.1*V <sub>DD</sub> | V<br>V<br>mA<br>mA<br>mA<br>mA |
| Load                                                                                                                                                                                                          |                                                                                                                |                                                            |           | 15                  | pF                             |
| Output Rise /Fall Time <sup>2</sup><br>1.544 to 20.000MHz<br>20.001 to 50.000MHz<br>50.001 to 125.000MHz                                                                                                      | t <sub>R</sub> /t <sub>F</sub>                                                                                 |                                                            |           | 6<br>5<br>3         | ns<br>ns<br>ns                 |
| Output Leakage, Output Disabled                                                                                                                                                                               | I <sub>Z</sub>                                                                                                 |                                                            |           | ±10                 | uA                             |
| Duty Cycle <sup>2,5</sup>                                                                                                                                                                                     |                                                                                                                | 45                                                         | 50        | 55                  | %                              |
| Period Jitter <sup>6</sup><br>RMS<br>Peak-Peak                                                                                                                                                                | ϕJ                                                                                                             |                                                            | 3.0<br>21 |                     | ps<br>ps                       |
| RMS Jitter, 12kHz-20MHz                                                                                                                                                                                       | ϕJ                                                                                                             |                                                            | 0.5       | 1                   | ps                             |
| Enable/Disable                                                                                                                                                                                                |                                                                                                                |                                                            |           |                     |                                |
| Output Enable/Disable <sup>7</sup><br>Output Enable<br>Output Disable                                                                                                                                         | V <sub>IH</sub><br>V <sub>IL</sub>                                                                             | 1.26                                                       |           | 0.5                 | V<br>V                         |
| Disable time                                                                                                                                                                                                  | t <sub>D</sub>                                                                                                 |                                                            |           | 100                 | ns                             |
| Enable Internal Pull-Up Resistor                                                                                                                                                                              |                                                                                                                |                                                            | 1         |                     | Mohm                           |
| Start-Up Time                                                                                                                                                                                                 | t <sub>SU</sub>                                                                                                |                                                            |           | 8                   | ms                             |
| Operating Temp (Ordering Option)                                                                                                                                                                              | T <sub>OP</sub>                                                                                                | -10/70, -20/70, -40/85, -40/105, -40/125, -55/105, -55/125 |           |                     | °C                             |

1] The power supply should have by-pass capacitors as close to the supply and to ground as possible, for example 0.1 and 0.01uF.

2] Parameters are tested with the test circuit shown in Fig 1.

3] See Standard Frequencies and Ordering Information tables for more specific information.

4] Includes initial accuracy, operating temperature, supply voltage, shock and vibration (not under operation) and aging for  $\pm 50$  and  $\pm 100$ ppm options.

5] Duty Cycle is measured as On Time/Period, see Fig 2.


6] Broadband Period Jitter measured using Wavecrest SIA3300C, 90K samples, see Application Note for Typical Phase Noise and Jitter Performance.

7] The Output is Enabled if the Enable/Disable is left open.

8] For 3rd overtone crystal designs.

9] Only  $\pm 50$  and  $\pm 100$  stability option available for -40/105 °C, -40/125 °C, -55/105 °C and -55/125 °C Operating temperature range.

## Outline Drawing & Pad Layout

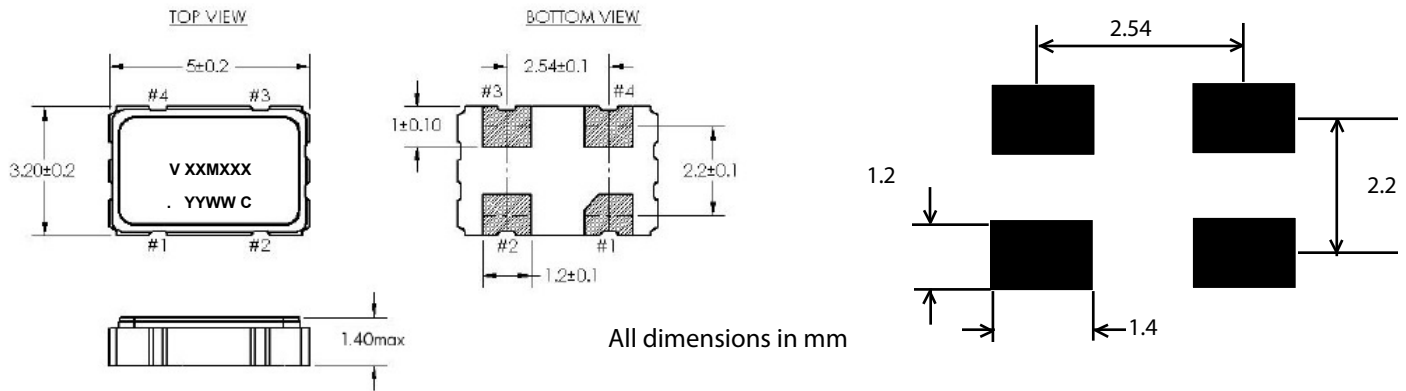

**Table 5. Pin Out**

| Pin | Symbol          | Function                   |
|-----|-----------------|----------------------------|
| 1   | E/D             | Enable Disable             |
| 2   | GND             | Case and Electrical Ground |
| 3   | Output          | Output                     |
| 4   | V <sub>DD</sub> | Power Supply Voltage       |

**Table 6. Enable Disable Function**

| E/D Pin | Output         |
|---------|----------------|
| High    | Clock Output   |
| Open    | Clock Output   |
| Low     | High Impedance |

## Reliability

Vectron qualification includes aging at various extreme temperatures, shock and vibration, temperature cycling, and IR reflow simulation. The VC-801 family is capable of meeting the following qualification tests:

**Table 7. Environmental Compliance**

| Parameter                  | Conditions                               |
|----------------------------|------------------------------------------|
| Mechanical Shock           | MIL-STD-883, Method 2002                 |
| Mechanical Vibration       | MIL-STD-883, Method 2007                 |
| Solderability              | MIL-STD-883, Method 2003                 |
| Gross and Fine Leak        | MIL-STD-883, Method 1014                 |
| Resistance to Solvents     | MIL-STD-883, Method 2015                 |
| Moisture Sensitivity Level | MSL 1                                    |
| Contact Pads               | Gold (0.3 um min 1.0 um max) over Nickel |
| Weight                     | 62 mg                                    |

Although ESD protection circuitry has been designed into the VC-801 proper precautions should be taken when handling and mounting. Vectron employs a human body model (HBM) and a charged device model (CDM) for ESD susceptibility testing and design protection evaluation.

**Table 8. ESD Ratings**

| Model                | Minimum | Conditions               |
|----------------------|---------|--------------------------|
| Human Body Model     | 1500V   | MIL-STD-883, Method 3015 |
| Charged Device Model | 1000V   | JESD22-C101              |

Stresses in excess of the absolute maximum ratings can permanently damage the device. Functional operation is not implied at these or any other conditions in excess of conditions represented in the operational sections of this datasheet. Exposure to absolute maximum ratings for extended periods may adversely affect device reliability. Permanent damage is also possible if E/D is applied before V<sub>DD</sub>.


**Table 9. Absolute Maximum Ratings**

| Parameter           | Symbol          | Ratings    | Unit     |
|---------------------|-----------------|------------|----------|
| Storage Temperature | T <sub>S</sub>  | -55 to 125 | °C       |
| Soldering Temp/Time | T <sub>LS</sub> | 260 / 30   | °C / sec |

## IR Reflow

### Solderprofile:

The VC-801 is qualified to meet the JEDEC standard for Pb-Free assembly. The temperatures and time intervals listed are based on the Pb-Free small body requirements. The VC-801 device is hermetically sealed so an aqueous wash is not an issue.

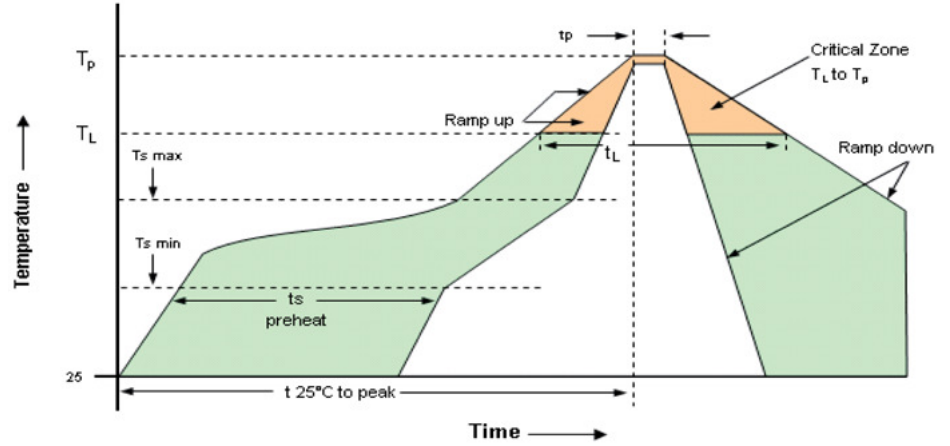


**Table 10. Reflow Profile**

| Parameter                                                  | Symbol             | Value                                     |
|------------------------------------------------------------|--------------------|-------------------------------------------|
| PreHeat Time<br>T <sub>s</sub> -min<br>T <sub>s</sub> -max | t <sub>s</sub>     | 60 sec Min, 260 sec Max<br>150°C<br>200°C |
| Ramp Up                                                    | R <sub>UP</sub>    | 3 °C/sec Max                              |
| Time Above 217 °C                                          | t <sub>L</sub>     | 60 sec Min, 150 sec Max                   |
| Time To Peak Temperature                                   | T <sub>AMB-P</sub> | 480 sec Max                               |
| Time at 260 °C                                             | t <sub>p</sub>     | 30 sec Max                                |
| Ramp Down                                                  | R <sub>DN</sub>    | 6 °C/sec Max                              |

## Tape and Reel

**Table 6. Tape and Reel Information**

| Tape Dimensions (mm) |     |     |     |     |     | Reel Dimensions (mm) |      |     |      |     |      |      |            |
|----------------------|-----|-----|-----|-----|-----|----------------------|------|-----|------|-----|------|------|------------|
| Dimension            | W   | F   | Do  | Po  | P1  | A                    | B    | C   | D    | N   | W1   | W2   | # Per Reel |
| Tolerance            | Typ | Typ | Typ | Typ | Typ | Typ                  | Min  | Typ | Min  | Min | Typ  | Max  |            |
| VC-801               | 12  | 5.5 | 1.5 | 4   | 8   | 178                  | 1.78 | 13  | 20.6 | 55  | 12.4 | 22.4 | 1000       |

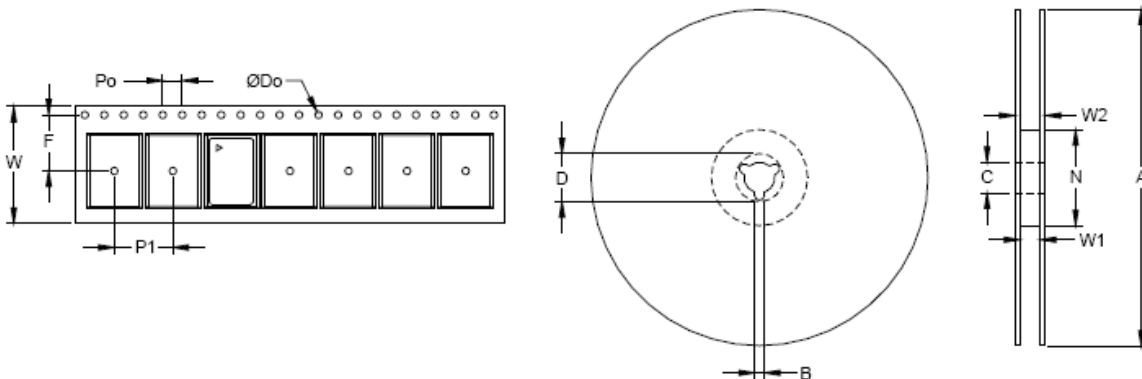

**Table 12. Standard Output Frequencies (MHz)**

|        |           |         |         |           |         |         |        |
|--------|-----------|---------|---------|-----------|---------|---------|--------|
| 9.8304 | 10.000    | 11.0590 | 11.0596 | 11.2896   | 12.000  | 12.272  | 12.288 |
| 12.353 | 13.000    | 13.500  | 13.560  | 14.318    | 14.7456 | 16.000  | 16.376 |
| 16.384 | 16.777216 | 16.800  | 17.734  | 17.734475 | 18.432  | 19.440  | 19.660 |
| 19.800 | 20.000    | 20.480  | 22.000  | 22.5792   | 24.000  | 24.5453 | 24.576 |
| 25.000 | 26.000    | 27.000  | 27,120  | 28.686    | 28.375  | 30.000  | 32.000 |
| 32.768 | 33.000    | 33.333  | 34.368  | 36.000    | 37.056  | 47.500  | 40.000 |
| 42.500 | 44.000    | 44.736  | 48.000  | 48.090    | 50.000  | 54.000  | 60.000 |
| 62.500 | 66.000    | 66.666  | 75.000  | 80.000    | 100.000 | 125.000 |        |

## Ordering Information

### VC-801- E A W- K A A N- xxMxxxxxxxXX

**Product**

Crystal Oscillator

**Package**

5x3.2 mm

**Power Supply**

D: +5.0Vdc

E: +3.3Vdc

H: +2.5Vdc

J: +1.8Vdc

**Output**

A: CMOS

**Temp Range**

W: -10/70°C

J: -20/70°C

E: -40/85°C

F: -40/105°C (±50 and ±100ppm)

7: -40/125°C (±50 and ±100ppm)

B: -55/105°C (±50 and ±100ppm)

C: -55/125°C (±50 and ±100ppm)

**Packaging**

TR: Tape and Reel

blank: Cut Tape / non Tape and Reel quantities

\_SNPB: Tin lead solder dipped

**Frequency****M** for MHz or**K** for kHz (32.768 kHz is available)**Custom Options**

N: Standard Option

**Load**

A: 15pF

B: 30pF

C: 50pF

**Enable/Disable**

A: Enable/Disable, Enable High

**Stability**

E: ±20ppm

F: ±25ppm

H: ±32ppm

K: ±50ppm

S: ±100ppm

*\*Note: not all combination of options are available. Other specifications may be available upon request. Please consult with factory.*

**Example:****VC-801-EAE-KAAN-25M0000000TR****VC-801-EAE-KAAN-25M0000000****VC-801-EAE-KAAN-25M0000000\_SNPB****Tape and Reel****Cut Tape****Tin lead solder dipped**




## Revision History

| Revision Date    | Approved | Description                                                                                                   |
|------------------|----------|---------------------------------------------------------------------------------------------------------------|
| October 17, 2014 | VN       | Modified package drawing to reflect 1.40mm maximum height. Added Revision History Table.                      |
| January 20, 2015 | VN       | Included ordering options for -40/105°C, -40/125°C and -55/105°C Operating temperature ranges                 |
| August 10, 2018  | FB       | Update logo and ordering information, Add SNPB DIP ordering information,                                      |
| March 22, 2019   | FB       | Update logo, contact information, disclaimer, change SNPB DIP to SNPB, add weight and gold plating thickness. |
| April 30, 2020   | FB       | Add tape and reel ordering option, updates and corrections as needed                                          |

***Previous Ordering Information for Reference Only  
Do Not Use to Build a New Part Number***

### VCC4- B3B- xxMxxxxxxxx

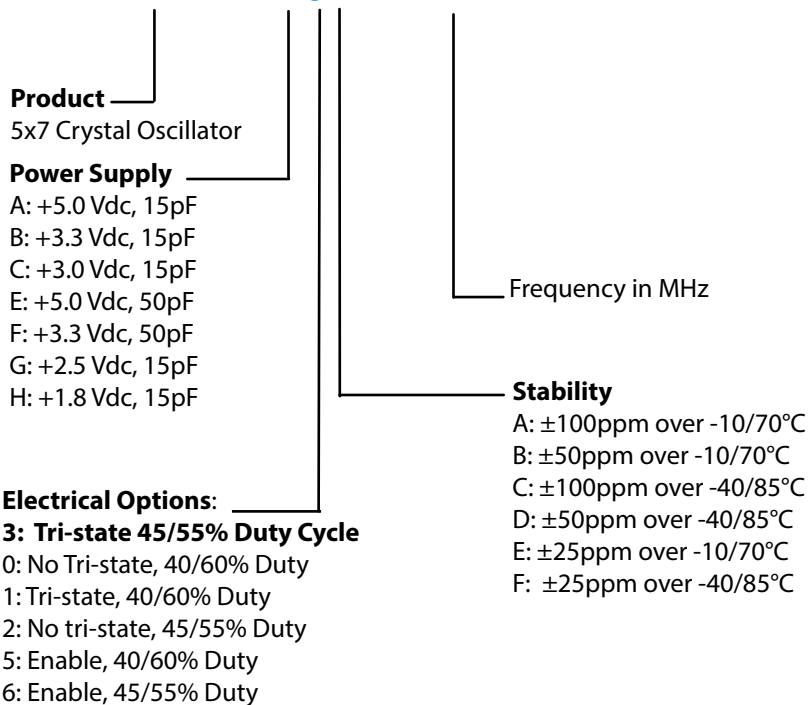

The ordering codes for the VCC4 were changed to VC-801 in 2016. If you had ordered a specific code based off this ordering method, it is still available for purchase under the old code however no new part numbers will be created using this system.

## Contact Information

### **USA:**

100 Watts Street  
Mt Holly Springs, PA 17065  
Tel: 1.717.486.3411  
Fax: 1.717.486.5920

### **Europe:**

Landstrasse  
74924 Neckarbischofsheim  
Germany  
Tel: +49 (0) 7268.801.0  
Fax: +49 (0) 7268.801.281



Information contained in this publication regarding device applications and the like is provided only for your convenience and may be superseded by updates. It is your responsibility to ensure that your application meets with your specifications. MICROCHIP MAKES NO REPRESENTATION OR WARRANTIES OF ANY KIND WHETHER EXPRESS OR IMPLIED, WRITTEN OR ORAL, STATUTORY OR OTHERWISE, RELATED TO THE INFORMATION INCLUDING, BUT NOT LIMITED TO ITS CONDITION, QUALITY, PERFORMANCE, MERCHANTABILITY OR FITNESS FOR PURPOSE. Microchip disclaims all liability arising from this information and its use. Use of Microchip devices in life support and/or safety applications is entirely at the buyer's risk, and the buyer agrees to defend, indemnify and hold harmless Microchip from any and all damages, claims, suits, or expenses resulting from such use. No licenses are conveyed, implicitly, or otherwise, under any Microchip intellectual property rights unless otherwise stated.

### **Trademarks**

The Microchip and Vectron names and logos are registered trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.