



SIGN	DATE	DESCRIPTION	APPROVER
1	1/27'07	Soldering temperature changed from 245° to 250°	Tony
2	10/10`13	Update the drawing	Chen Bo
		THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!	

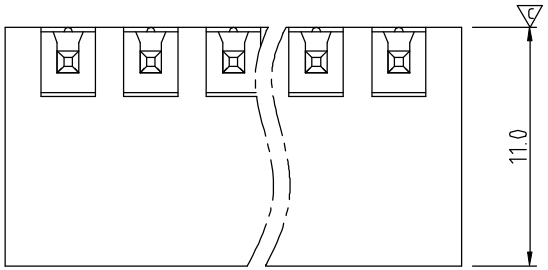

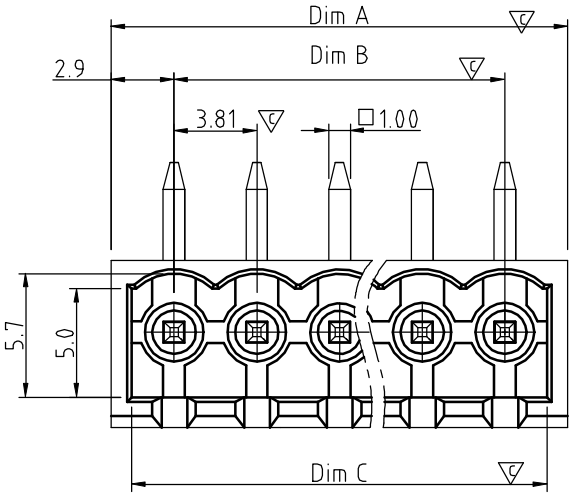

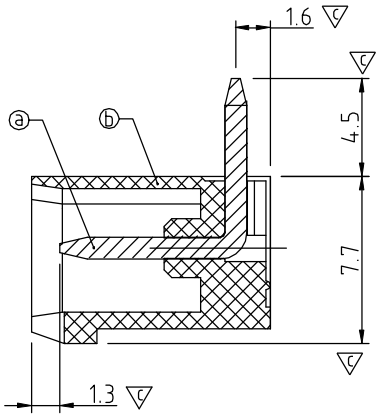

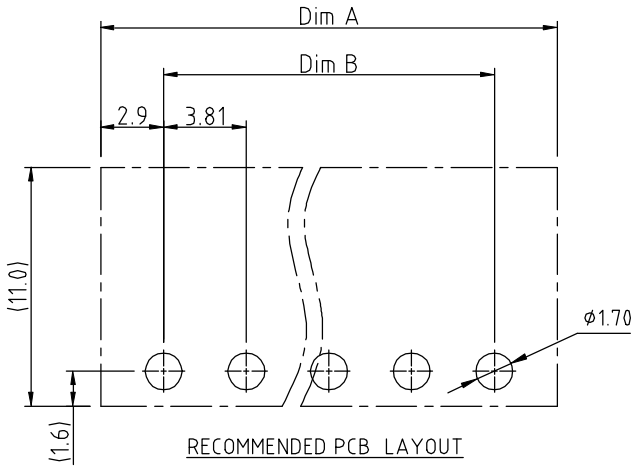

RECOMMENDED PCB LAYOUT

Material:

- Item ⓐ Contact pin:Copper,Tin plated
- Item ⓑ Terminal(housing): Thermoplastic (UL94V-0)

Electrical:	cULus
Voltage rating:	300V
Current rating:	8A
Withstanding Voltage:	1.6 KV
Operating temperature:	-40°C to +115°C
⚠1 Soldering temperature:	260°C±5°C/5 Sec
Safety Approval:	c UL us
Critical dimension:	▽

DIMENSION

Dim A	N×3.81+2
Dim B	(N-1)X3.81
Dim C	(N-1)X3.81+3.9

N= NUMBER OF POLES

Poles	Dim A	Dim B	Dim C
2P-5P	±0.15		+0.15 -0.0
6P-10P	±0.20		+0.20 -0.0
11P-15P	±0.25		+0.25 -0.0
16P-20P	±0.30		+0.30 -0.0
21P-24P	±0.35		+0.35 -0.0

VE xx 3 1 x 1 xxxx G

- No. OF POLES
  - 02: 2 POLES
  - :
  - :
  - 24: 24 POLES
- x
  - 0 Black (RAL9005)
  - 2 Red (RAL3001/D)
  - 3 Orange(RAL2011/P)
  - 4 Yellow(RAL1018/A)
  - 5 Green(RAL6018/T)
  - 6 Blue (RAL5015/A)
  - 8 Grey(RAL7035/D)
  - 9 White(RAL1102)
  - C Green(RAL6018/U)
- xxxx
  - 0000: "@" Logo (Standard)
  - 000A: "ANYTEK" Mark
  - Any special item by customer requst. please contact sales department.
- G RoHS compliant (lead<4%) In copper Alloy

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	VE-3.81 Series 90° (Close)				
PART NO.	VExx31x1xxxxG			DWG NO.	8VE0004
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	
		Chen Bo 10/10`13	Chen Bo 10/10`13	UNIT: mm	
				SCALE: NONE	
				SHEET: 01/01	REV.: E

Tolerance	
X.	±0.50
X.X	±0.30
X.XX	±0.10
X°	±1°