


2

1

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

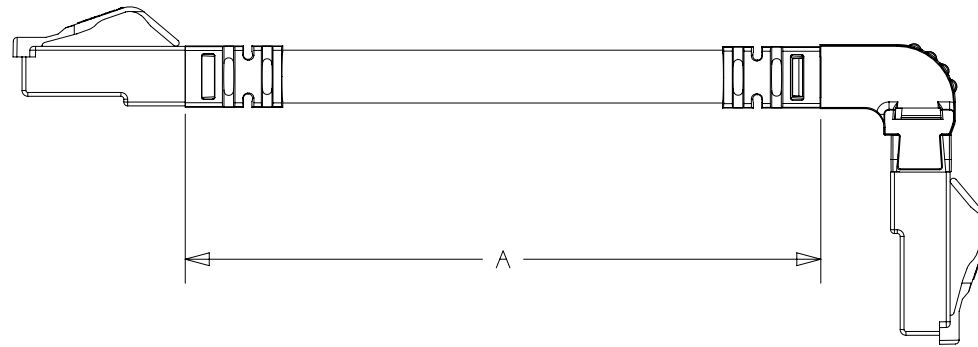

PANDUIT P/N	"A"
VS-AVT-CABLE-02	2 FT
VS-AVT-CABLE-04	4 FT
VS-AVT-CABLE-08	8 FT
VS-AVT-CABLE-16	16 FT
VS-AVT-CABLE-20	20 FT
VS-AVT-CABLE-30	30 FT

NOTES:

1. AVT DEVICE SYSTEM CABLE PROVIDES POWER AND SIGNAL BETWEEN THE INDICATOR MODULE AND THE VDD ISOLATION MODULE.
2. THIS CABLE SHOULD NOT BE USED FOR ETHERNET COMMUNICATION.
3. SEE PRICE LIST FOR CURRENT PRICE AND ORDERING INFORMATION.

PRODUCT SPEC		PACKAGING SPEC	
PART NUMBER SEE TABLE		WORK INSTRUCTION	
INSPECTION INSTRUCTION NUMBER		FMEA & CONTROL PLAN NUMBER	
TITLE AVT SYSTEM CABLE			
CUSTOMER DRAWING			
ITEM REVISION NAME 14I216AR/06		PANDUIT	
DATASET FILE NAME 14I216AR_DC/06			
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm] .x ± .1 [2.54] .xxx ± .005 [.127] .xx ± .01 [.25] ANGLES ± 5 °		MATERIAL: RoHS COMPLIANT	
THIRD ANGLE PROJECTION 		DRAWING NUMBER: 14I216AR_DC	
DRAWN BY DFA	DATE 5/25/17	CHK MSAD	SCALE NONE
SHT 1 OF 1		SIZE A	

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
1	10/2/17	DFA	CLW	MSAD	ADDED 4, 16, 20 AND 30 FT CABLES TO TABLE	GAECN05158
0	5/25/17	DFA	CLW	MSAD	INITIAL RELEASE	GAECN05094

2

1

D10100DA/20