


Product availability: Stock - Normally stocked in distribution facility

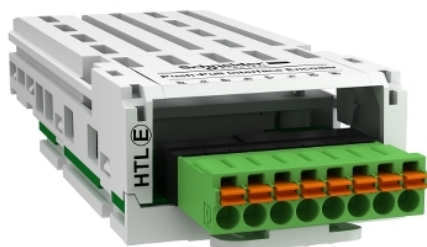

### Main

Range of product	Altivar
Product or component type	Encoder interface module
Range compatibility	Altivar Process ATV900 Altivar Process Modular Altivar Machine ATV340
Encoder type	High threshold logic (HTL)
[Us] rated supply voltage	12 V DC 15 V DC 24 V DC

### Complementary

Maximum supply current	0.2 A 12 V DC 0.175 A 15 V DC 0.1 A 24 V DC
Protection type	Short-circuit protection Overload protection
Maximum cable distance between devices	1640.42 ft (500 m)
Maximum operating frequency	12 kHz
Input signal	Push-pull differential A/AB/B Push-pull single ended AB Push-pull single ended A Open collector differential A/AB/B Open collector PNP AB Open collector NPN AB Open collector PNP A Open collector NPN A
Connector type	1 removable spring connector
Net weight	0.33 lb(US) (0.15 kg)

### Ordering and shipping details

Category	22209 - ATV650
Discount Schedule	CP4E
GTIN	00785901638117
Package weight(Lbs)	1.13 kg (2.5 lb(US))
Returnability	Yes
Country of origin	ID

### Offer Sustainability

EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a>
Mercury free	Yes
RoHS exemption information	<a href="#">Yes</a>
China RoHS Regulation	<a href="#">China RoHS Declaration</a>