



## Main

Range of product	Lexium 32i
Product or component type	Connector module
Accessory / separate part category	Connection accessories
Electrical connection	Industrial connector

## Complementary

Product compatibility	Drive control unit LXM32i CANopen
Accessory / separate part destination	Motor BMI with drive control unit Lexium 32i
Range compatibility	Lexium 32i
Communication interface	CANmotion CANopen DS402
Input/output type	4 discrete inputs
Discrete input logic	Sink
Net weight	0.218 kg

## Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	8.2 cm
Package 1 Width	11.5 cm
Package 1 Length	17.0 cm
Package 1 Weight	218.0 g
Unit Type of Package 2	S03
Number of Units in Package 2	12
Package 2 Height	30.0 cm
Package 2 Width	30.0 cm
Package 2 Length	40.0 cm
Package 2 Weight	3.329 kg

## Offer Sustainability

REACH Regulation	<a href="#">REACH Declaration</a>
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a>
Mercury free	Yes
China RoHS Regulation	<a href="#">China RoHS Declaration</a>
RoHS exemption information	<a href="#">Yes</a>
Environmental Disclosure	<a href="#">Product Environmental Profile</a>
Circularity Profile	<a href="#">End Of Life Information</a>

## Contractual warranty


---

Warranty

18 months

---

Connection of I/O Module for CANopen with Industrial Connectors

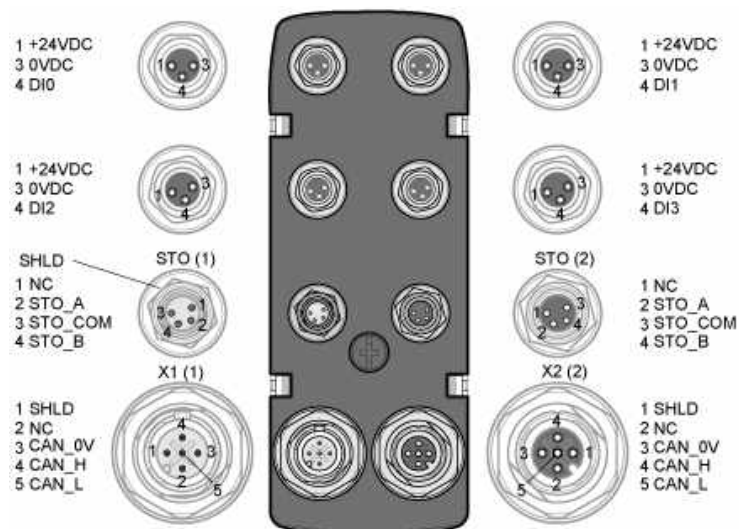

- (1) IN
- (2) OUT

Signal	Meaning
+24VDC	24 V signal power supply
0VDC	Reference potential to +24VDC
DI0	Digital input 0
DI1	Digital input 1
DI2	Digital input 2
DI3	Digital input 3
STO_A	Safety function STO
STO_COM	Reference potential for safety function STO
STO_B	Safety function STO
SHLD	Shield (grounded internally)
CAN_0V	Reference potential for CAN
CAN_H	CAN interface
CAN_L	CAN interface
NC	Not connected