


Ceramic Disc Capacitors Safety Standard Approved Disc Capacitor

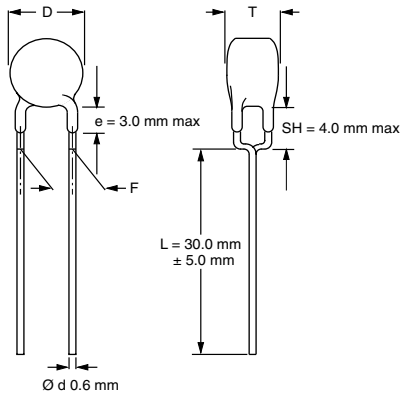

Capacitors with 5.0 mm, 7.5 mm or 10 mm lead spacing

DISSIPATION FACTOR:

2.5 % maximum

CATEGORY TEMPERATURE RANGE:

- 40 °C to + 125 °C

TEMPERATURE CHARACTERISTICS:

See Ordering Information Tables

CLIMATIC CATEGORY:

40/125/21 according to EN60068-1

COATING:

according to UL 94V-0
epoxy resin, isolating, flame retardant

WEEE/RoHS:

Components in accordance with EU Directive 2002/95/EC
Lead (Pb)-free terminals and internal solder joints

APPROVALS:

ENEC - VDE DE 1-30691
UL 1414 file E183844
CSA 22.2

PACKAGING:

Bulk; tape and reel; taped ammpack

FEATURES

- Complying with “EN 132 400” and “IEC 60384-14, 2nd edition, including amendment 1.1995”
- High reliability
- Vertical (inline) kinked or straight leads



**RoHS
COMPLIANT**

APPLICATIONS

- Across-the-line
- Line by-pass
- Antenna coupling

DESIGN

The capacitors consist of a ceramic disc both sides of which are silver-plated. Connection leads are made of tinned copper having a diameter of 0.6 mm.

The capacitors may be supplied with vertical (inline) kinked leads having a lead spacing of 5.0 mm, 7.5 mm or 10.0 mm. Encapsulation is made of flammable resistant epoxy resin in accordance with “UL94V-0”.

CAPACITANCE RANGE:

10 pF to 0.01 µF

RATED VOLTAGE U_R:

IEC 60384-14.2:
(X1): 440 V (AC), 50 Hz
(Y2): 300 V (AC), 50 Hz

TEST VOLTAGE:

Component Test (100 %):
2600 V (AC), 50 Hz, 2 seconds
(2600 V (AC) for LS 7.5 mm and 10 mm)
(2200 V (AC) for LS 5.0 mm)

Random sampling test (destructive test):



2600 V (AC), 50 Hz, 60 seconds
Voltage proof of coating (destructive test):
2600 V (AC), 50 Hz, 60 seconds

INSULATION RESISTANCE:

10 000 MΩ minimum

TOLERANCE OF CAPACITANCE:

± 20 % (Code M); ± 10 % (Code K)

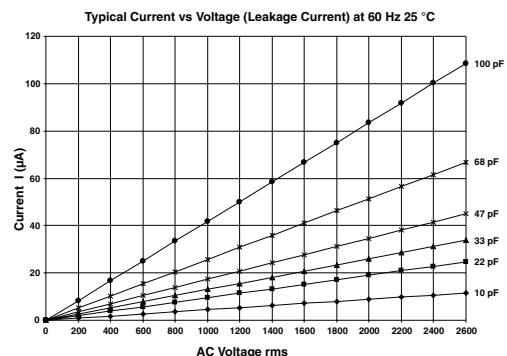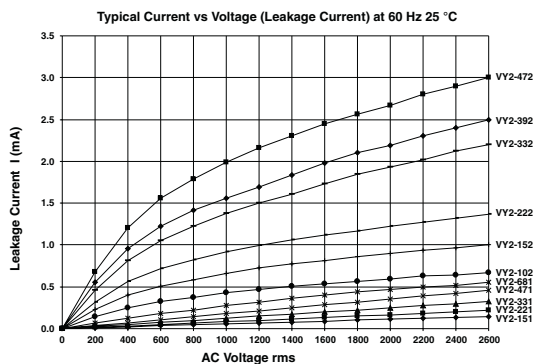

The capacitors meet the essential requirements of “EIA 198”. Unless stated otherwise all electrical values apply at an ambient temperature of 25 ± 3 °C, at normal atmospheric conditions



Ceramic Disc Capacitors
Safety Standard Approved Disc Capacitor

Vishay BCcomponents

ORDERING INFORMATION													
C (pF)	TOL. (%)	TEMP. COEFFICIENT	BODY DIAMETER D _{max} (mm)	BODY THICK T _{max} (mm)	LEAD SPACING F (mm)	COATING EXTENSION e _{max} ⁽⁴⁾ (mm)	CLEAR TEXT CODE						
							15 th DIGIT*: T = REEL; U = AMMO; 3 = BULK ⁽²⁾						
VY2 FOR LEADSPACING 5.0 mm				2200 VAC, 50 Hz, 2 SECONDS									
10	± 10	U2J (N750)	7.5	5.0	5.0	3.0	VY2100K29U2JS6*V5						
15							VY2150K29U2JS6*V5						
22							VY2220K29U2JS6*V5						
33							VY2330K29U2JS6*V5						
47							VY2470K29U2JS6*V5						
68							VY2680K29Y5SS6*V5						
100							VY2101K29Y5SS6*V5						
150							VY2151K29Y5SS6*V5						
220							VY2221K29Y5SS6*V5						
330							VY2331K29Y5SS6*V5						
470	± 20	Y5S (2C3)	7.5	5.0	5.0	3.0	VY2471K29Y5SS6*V5						
680							VY2681M29Y5US6*V5						
1000							VY2102M29Y5US6*V5						
1500							VY2152M31Y5US6*V5						
2200							VY2222M35Y5US6*V5						
3300							VY2332M41Y5US6*V5						
3900							VY2392M43Y5US6*V5						
10							± 10	Y5U (2E3)	8.0	5.0	5.0	3.0	VY2100K29U2JS6*V5
15													VY2150K29U2JS6*V5
22													VY2220K29U2JS6*V5
33	VY2330K29U2JS6*V5												
47	VY2470K29U2JS6*V5												
68	VY2680K29Y5SS6*V5												
100	VY2101K29Y5SS6*V5												
150	VY2151K29Y5SS6*V5												
220	VY2221K29Y5SS6*V5												
330	VY2331K29Y5SS6*V5												
470	± 20	Y5U (2E3)	9.0	5.0	5.0	3.0	VY2471K29Y5SS6*V5						
680							VY2681M29Y5US6*V5						
1000							VY2102M29Y5US6*V5						
1500							VY2152M31Y5US6*V5						
2200							VY2222M35Y5US6*V5						
3300							VY2332M41Y5US6*V5						
3900							VY2392M43Y5US6*V5						
10							± 10	Y5U (2E3)	10.5	5.0	5.0	3.0	VY2100K29U2JS6*V5
15													VY2150K29U2JS6*V5
22													VY2220K29U2JS6*V5
33	VY2330K29U2JS6*V5												
47	VY2470K29U2JS6*V5												
68	VY2680K29Y5SS6*V5												
100	VY2101K29Y5SS6*V5												
150	VY2151K29Y5SS6*V5												
220	VY2221K29Y5SS6*V5												
330	VY2331K29Y5SS6*V5												
470	± 20	Y5U (2E3)	11.0	5.0	5.0	3.0	VY2471K29Y5SS6*V5						
680							VY2681M29Y5US6*V5						
1000							VY2102M29Y5US6*V5						
1500							VY2152M31Y5US6*V5						
2200							VY2222M35Y5US6*V5						
3300							VY2332M41Y5US6*V5						
3900							VY2392M43Y5US6*V5						

ORDERING INFORMATION													
C (pF)	TOL. (%)	TEMP. COEFFICIENT	BODY DIAMETER D _{max} (mm)	BODY THICK T _{max} (mm)	LEAD SPACING F (mm)	COATING EXTENSION e _{max} ⁽⁴⁾ (mm)	CLEAR TEXT CODE						
							15 th DIGIT*: T = REEL; U = AMMO; 3 = BULK ⁽²⁾						
VY2 FOR LEADSPACING 7.5 mm				2600 VAC, 50 Hz, 2 SECONDS									
10	± 10	U2J (N750)	7.5	5.0	7.5	3.0	VY2100K29U2JS6*V7						
15							VY2150K29U2JS6*V7						
22							VY2220K29U2JS6*V7						
33							VY2330K29U2JS6*V7						
47							VY2470K29U2JS6*V7						
68							VY2680K29Y5SS6*V7						
100							VY2101K29Y5SS6*V7						
150							VY2151K29Y5SS6*V7						
220							VY2221K29Y5SS6*V7						
330							VY2331K29Y5SS6*V7						
470	± 20	Y5S (2C3)	7.5	5.0	7.5	3.0	VY2471K29Y5SS6*V7						
680							VY2681M29Y5US6*V7						
1000							VY2102M29Y5US6*V7						
1500							VY2152M31Y5US6*V7						
2200							VY2222M35Y5US6*V7						
3300							VY2332M41Y5US6*V7						
3900							VY2392M43Y5US6*V7						
10							± 10	Y5U (2E3)	8.0	5.0	7.5	3.0	VY2100K29U2JS6*V7
15													VY2150K29U2JS6*V7
22													VY2220K29U2JS6*V7
33	VY2330K29U2JS6*V7												
47	VY2470K29U2JS6*V7												
68	VY2680K29Y5SS6*V7												
100	VY2101K29Y5SS6*V7												
150	VY2151K29Y5SS6*V7												
220	VY2221K29Y5SS6*V7												
330	VY2331K29Y5SS6*V7												
470	± 20	Y5U (2E3)	9.0	5.0	7.5	3.0	VY2471K29Y5SS6*V7						
680							VY2681M29Y5US6*V7						
1000							VY2102M29Y5US6*V7						
1500							VY2152M31Y5US6*V7						
2200							VY2222M35Y5US6*V7						
3300							VY2332M41Y5US6*V7						
3900							VY2392M43Y5US6*V7						
10							± 10	Y5U (2E3)	10.5	5.0	7.5	3.0	VY2100K29U2JS6*V7
15													VY2150K29U2JS6*V7
22													VY2220K29U2JS6*V7
33	VY2330K29U2JS6*V7												
47	VY2470K29U2JS6*V7												
68	VY2680K29Y5SS6*V7												
100	VY2101K29Y5SS6*V7												
150	VY2151K29Y5SS6*V7												
220	VY2221K29Y5SS6*V7												
330	VY2331K29Y5SS6*V7												
470	± 20	Y5U (2E3)	11.0	5.0	7.5	3.0	VY2471K29Y5SS6*V7						
680							VY2681M29Y5US6*V7						
1000							VY2102M29Y5US6*V7						
1500							VY2152M31Y5US6*V7						
2200							VY2222M35Y5US6*V7						
3300							VY2332M41Y5US6*V7						
3900							VY2392M43Y5US6*V7						
10							± 10	Y5U (2E3)	12.5	5.0	7.5	3.0	VY2100K29U2JS6*V7
15													VY2150K29U2JS6*V7
22													VY2220K29U2JS6*V7
33	VY2330K29U2JS6*V7												
47	VY2470K29U2JS6*V7												
68	VY2680K29Y5SS6*V7												
100	VY2101K29Y5SS6*V7												
150	VY2151K29Y5SS6*V7												
220	VY2221K29Y5SS6*V7												
330	VY2331K29Y5SS6*V7												
470	± 20	Y5U (2E3)	14.5	5.0	7.5	3.0	VY2471K29Y5SS6*V7						
680							VY2681M29Y5US6*V7						
1000							VY2102M29Y5US6*V7						
1500							VY2152M31Y5US6*V7						
2200							VY2222M35Y5US6*V7						
3300							VY2332M41Y5US6*V7						
3900							VY2392M43Y5US6*V7						
10							± 10	Y5U (2E3)	16.0	5.0	7.5	3.0	VY2100K29U2JS6*V7
15													VY2150K29U2JS6*V7
22													VY2220K29U2JS6*V7
33	VY2330K29U2JS6*V7												
47	VY2470K29U2JS6*V7												
68	VY2680K29Y5SS6*V7												
100	VY2101K29Y5SS6*V7												
150	VY2151K29Y5SS6*V7												
220	VY2221K29Y5SS6*V7												
330	VY2331K29Y5SS6*V7												
470	± 20	Y5U (2E3)	16.0	5.0	7.5	3.0	VY2471K29Y5SS6*V7						
680							VY2681M29Y5US6*V7						
1000							VY2102M29Y5US6*V7						
1500							VY2152M31Y5US6*V7						
2200							VY2222M35Y5US6*V7						
3300							VY2332M41Y5US6*V7						
3900							VY2392M43Y5US6*V7						
0.01 µF							± 20	Y5U (2E3)	16.0	5.0	7.5	3.0	VY2103M63Y5US63V7

ORDERING INFORMATION							
C (pF)	TOL. (%)	TEMP. COEFFICIENT	BODY DIAMETER D _{max} (mm)	BODY THICK T _{max} (mm)	LEAD SPACING F (mm)	COATING EXTENSION e _{max} ⁽³⁾ (mm)	CLEAR TEXT CODE
							15 th DIGIT*: T = REEL; U = AMMO; 3 = BULK ⁽²⁾
VY2 FOR LEADSPACING 10.0 mm						2600 VAC, 50 Hz, 2 SECONDS	
10	± 10	U2J (N750)	7.5	5.0	10.0	3.0	VY2100K29U2JS6*V0
15							VY2150K29U2JS6*V0
22							VY2220K29U2JS6*V0
33							VY2330K29U2JS6*V0
47							VY2470K29U2JS6*V0
68							VY2680K29Y5SS6*V0
100							VY2101K29Y5SS6*V0
150							VY2151K29Y5SS6*V0
220							VY2221K29Y5SS6*V0
330							VY2331K29Y5SS6*V0
470	± 20	Y5U (2E3)	8.0	5.0	10.0	3.0	VY2471K29Y5SS6*V0
680							VY2681M29Y5US6*V0
1000							VY2102M29Y5US6*V0
1500							VY2152M31Y5US6*V0
2200							VY2222M35Y5US6*V0
3300							VY2332M41Y5US6*V0
3900							VY2392M43Y5US6*V0
4700							VY2472M49Y5US6*V0
6800							VY2682M59Y5US6*V0
0.01 µF							VY2103M63Y5US6*V0

Notes

1. Straight leads are available on request.
2. 15th digit of the clear text code number to be completed with the packaging code.
3. Coating extension e valid for straight leads only.
4. On request available: ± 10 % tolerance for capacitance value 680 pF.

LEADSPACING 5.0 AND 7.5 mm

PACKAGING					
CAPACITANCE VALUE	SIZE CODE	BODY DIAMETER D _{max} (mm)	PACKAGING QUANTITIES		
			BULK	REEL	AMMO
10 pF to 4700 pF	29 ~ 49	12.5	1000	1000	1000
6800 pF to 0.01 µF	59 ~ 63	16.0	500	-	-

LEADSPACING 10.0 mm

PACKAGING					
CAPACITANCE VALUE	SIZE CODE	BODY DIAMETER D _{max} (mm)	PACKAGING QUANTITIES		
			BULK	REEL	AMMO
10 pF to 4700 pF	29 ~ 49	12.5	1000	500	750
6800 pF to 0.01 µF	59 ~ 63	16.0	500	500	750


Note

1. The capacitors are supplied in bulk packaging (cardboard boxes), in tape on reel or in ammopack.



Ceramic Disc Capacitors
Safety Standard Approved Disc Capacitor

Vishay BCcomponents

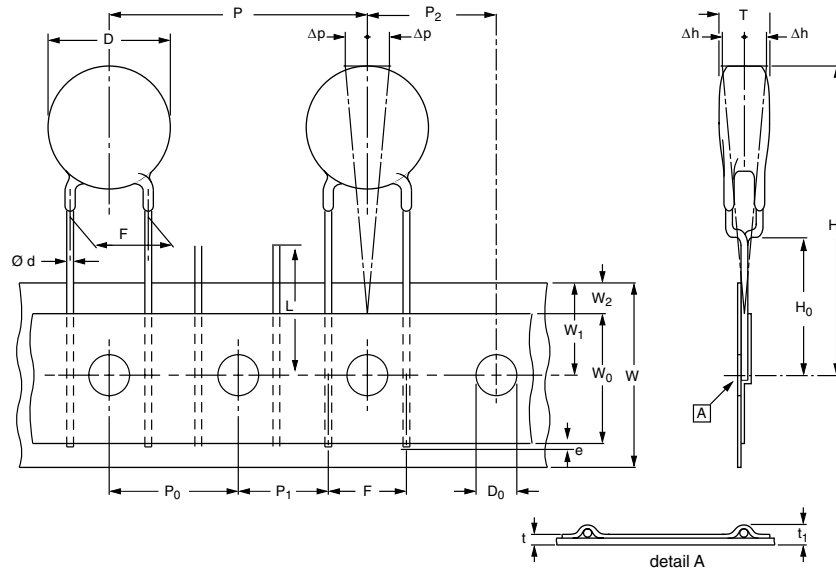


Inline kink (V) leaded capacitors on tape, lead spacing 5.0 mm (0.200"), 7.5 mm (0.300") and 10 mm (0.400")

STANDARD RECOGNITION

IEC 60384 - 14/2nd Issue (1993) incl. Am.1 (1995) - Safety Tests
EN 132 400 (1994) - Safety Tests

UL 1414 - Across-the-line, antenna-coupling and line-by-pass component
CCC - Chinese Safety Standard is available on request

MARKING: 2 SIDES
(EXAMPLE)

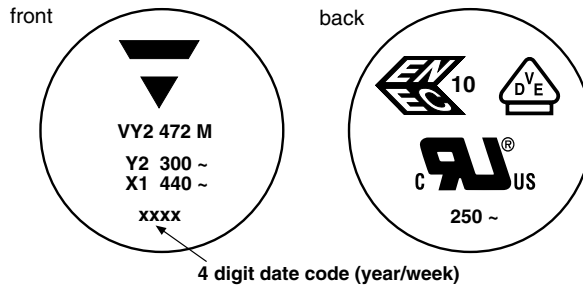

LABEL
(EXAMPLE)



PN: VY2331K29Y5SS6UV7 Lot1: 14Z549306 DC1: 0601
QTY: 1000 Lot2: DC2:
PO: Batch: 200601CN
SO: Region: 9520 SL: 0010
Ser.No: 0601H72383




2/5

DIMENSIONS OF TAPE				
SYMBOL	PARAMETER	DIMENSIONS (mm)		
		Fig.1 5 mm	Fig.1 7.5 mm	Fig.2 10 mm
D ¹⁾	body diameter	11.0 max.	14.0 max.	22.0 max.
d	lead diameter	0.6 ± 0.05	0.6 ± 0.05	0.6 ± 0.05
P	pitch of component	12.7 ± 1	15.0 ± 1	25.4 ± 1
P ₀ ²⁾	pitch of sprocket hole	12.7 ± 0.3	15.0 ± 0.4	12.7 ± 0.3
P ₁ ³⁾	distance, hole centre to lead	3.85 ± 0.7	3.75 ± 0.7	7.7 ± 1.0
P ₂ ³⁾	distance, hole to centre of component	6.35 ± 1.3	7.5 ± 1.3	12.7 ± 1.5
F	lead spacing	5.0 (+ 0.6/- 0.4)	7.5 (± 1.0)	10 (± 1.0)
Δh	average deviation across tape	± 1.0 max.	± 1.0 max.	± 1.0 max.
ΔP	average deviation in direction of reeling	± 1.0 max.	± 1.0 max.	± 1.0 max.
W	carrier tape width	18.0 + 1/- 0.5	18.0 + 1/- 0.5	18.0 + 1/- 0.5
W ₀	hold-down tape width	5.0 min.	5.0 min.	5.0 min.
W ₁	position of sprocket hole	9.0 + 0.75 - 0.5	9.0 + 0.75 - 0.5	9.0 + 0.75 - 0.5
W ₂	distance of hold-down tape	3.0 max.	3.0 max.	3.0 max.
H ₁	maximum component height	32.0	40.1	40.0
H ₀	height to seating plane	16.0 ± 0.5	16.0 ± 0.5	16.0 ± 0.5
H ₀	height to seating plane straight leads	20.0 ± 0.5	20.0 ± 0.5	20.0 ± 0.5
L	length of cut leads	11.0 max.	11.0 max.	11.0 max.
l	length of lead protrusion	1.0 max.	1.0 max.	1.0 max.
D ₀	diameter of sprocket hole	4.0 ± 0.2	4.0 ± 0.2	4.0 ± 0.2
t	total tape thickness	0.9 max.	0.9 max.	0.9 max.


Notes

1. See ordering information table.
2. Cumulative pitch error: ± ≤ 1 mm/20 pitches.
3. Obliquity maximum 3°.

REEL AND TAPE DATA in millimeters

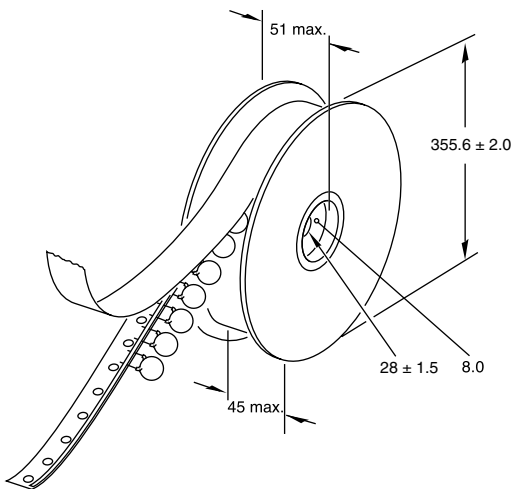

Reel with capacitors on tape

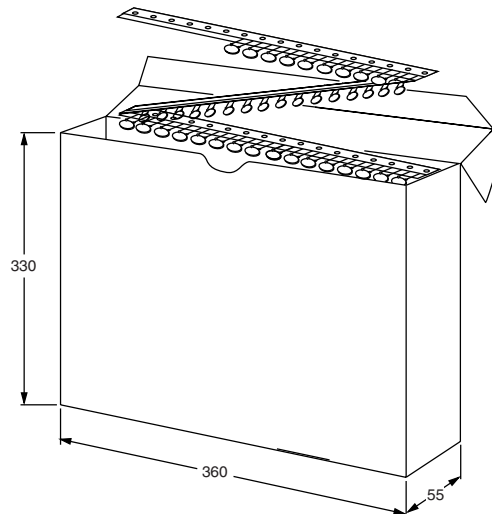

Ampopack with capacitors on tape



Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.