

X2-3.5-0-SP-SM ✓ ACTIVE

RAYCHEM | RAYCHEM SWFR X2

TE Internal #: EM7484-000

Black, 2:1, Single Wall Tubing, Shrinks To .069 in [1.75 mm], ZEROHAL Polyolefin, .15 in [3.8 mm] Inner Diameter, Flame-Retardant, RAYCHEM SWFR X2

[View on TE.com >](#)



Heat Shrink Tubing > SWFR-X2 Heat Shrink Tubing



Primary Product Color: **Black**

Wall Type: **Single Wall**

Expanded Inside Diameter (Min): **3.8 mm [.15 in]**

Recovered Inside Diameter (Max): **1.75 mm [.069 in]**

Shrink Ratio: **2:1**

[All SWFR-X2 Heat Shrink Tubing \(21\)](#)

Features

Product Type Features

Wall Type	Single Wall
-----------	-------------

Electrical Characteristics

Operating Voltage (Max)	.6 kV
-------------------------	-------

Body Features

Fluid Type	Water
Primary Product Color	Black
Shrink Ratio	2:1
Primary Product Material	ZEROHAL Polyolefin
Flexibility	Very Flexible

Dimensions

Recovered Wall Thickness (Nominal)	.46 mm[.018 in]
Expanded Inside Diameter (Min)	3.8 mm[.15 in]
Recovered Inside Diameter (Max)	1.75 mm[.069 in]

Usage Conditions

Shrink Temperature (Min)	70 °C
--------------------------	-------



Tubing Flammability Type	Flame-Retardant
Operating Temperature Range	-30 – 125 °C
Recovery Temperature	90 °C

Operation/Application

Mechanical Resistance	Abrasion
-----------------------	----------

Product Availability

Applicable Region	Global
-------------------	--------

Packaging Features

Packaging Method	Spool
------------------	-------

Other

Meets Low Outgassing Requirements	No
Product Source	China

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # EG1114-000
CV1981-ST-230V1600W-EU

Also in the Series | RAYCHEM SWFR X2

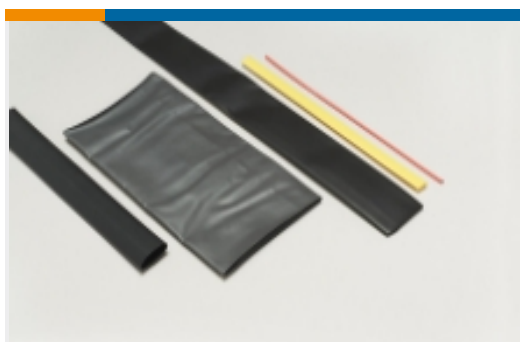

Heat Shrink Tubing(21)

Customers Also Bought



TE Part #321233
TERMINAL,PIDG SPD 16-14 8



TE Part #754073-000
TMS-RJS-RIBBON-4HT



TE Part #102387-4
20 MODIV HSG COMP DR .100 POL




TE Part #5-104361-4
05 MTE HDR SRRA LATCH W/HLDWN



TE Part #2-34854-1
TERMINAL,PG R 12-10 10



TE Part #1-6609132-0
3EZM4S=F8124

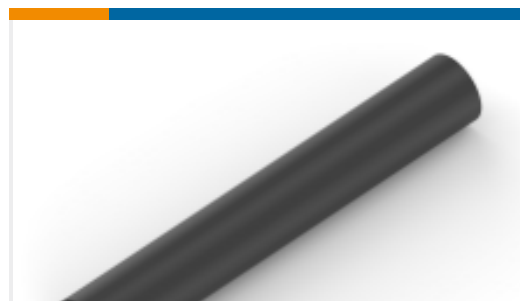

TE Part #NB10802001
ATUM-32/8-0-STK



TE Part #34110
SOLIS R 22-16 COMM 22-18 MIL 6

Documents

Product Drawings

X2-3.5-0-SP-SM

English



X2-3.5-0-SP-SM

English

Datasheets & Catalog Pages

[Highly Flame-Retardant, Zero halogen, Low Recovery Temperature, Metric-Sized Heat-Shrinkable Tubing](#)

English

Product Specifications

[Application Specification](#)

English