

OMRON ELECTRONICS

See full Datasheet below...

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

BUY NOW

 **MASTER**TM
E L E C T R O N I C S

BUY NOW

masterelectronics.com & onlinecomponents.com
are **authorized** e-commerce distributors
of electronic components.


XM2/XM3

D-sub Connectors

D-sub Connectors Ideal for Interfacing with OA Equipment

OA:Office Automation


- D-sub Connectors Ideal for Interfacing with OA Equipment.
- Shielded connectors that prevent EMI.
- Noise can be suppressed effectively by using the XM2S Plastic Hood with metallic finish.
- XM3B-F multi-hole ferrite-core models are also available. Use these models to suppress high-frequency noise and save PCB mounting space.
- Compact and tough structure with a metal shell provided.
- A wide variety of mounting brackets and grounding metals are available.

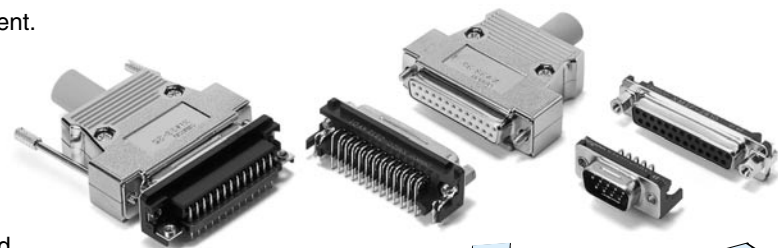

Connection Examples

●XM2F Sockets with Straight Terminal

Shape	XM2F-□□10	XM2F-□□10-132
Number of contacts	9,15,25,37	9,15,25,37

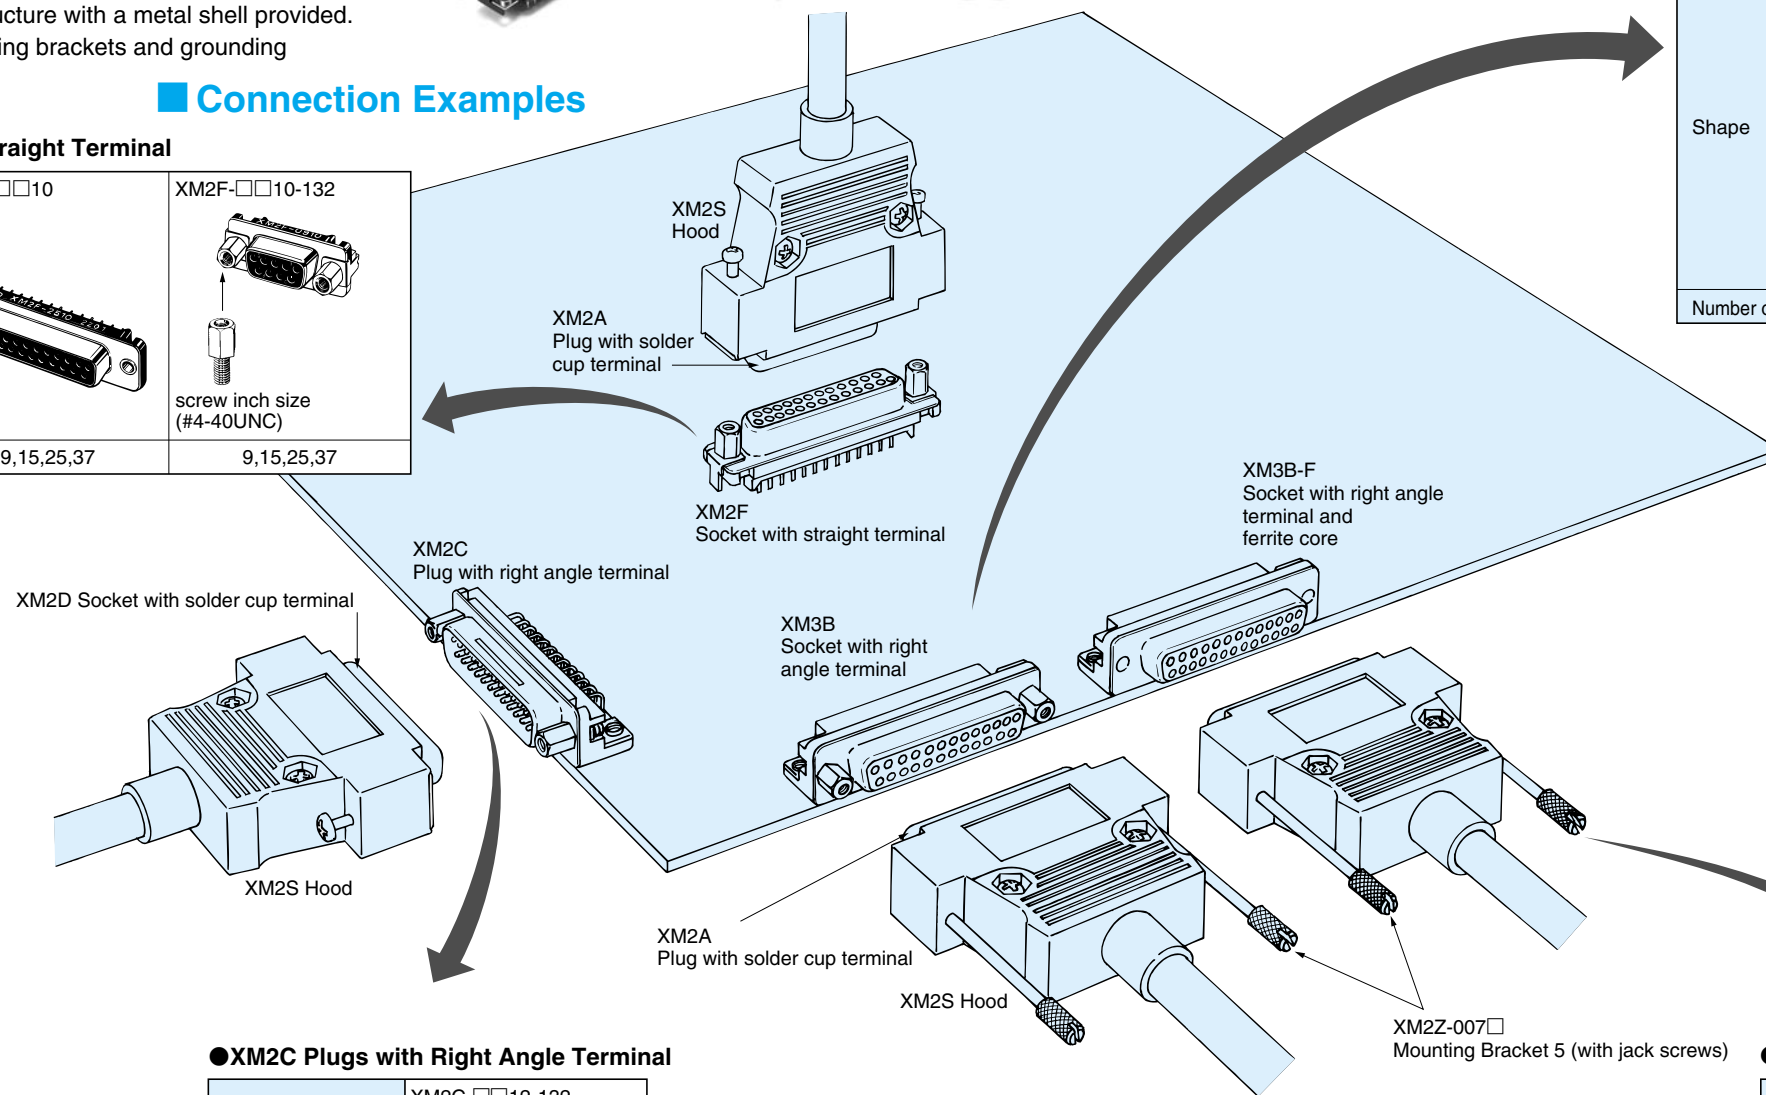

●XM3B Sockets with Right Angle Terminal

Shape	XM3B-□□22-132 screw inch size (#4-40UNC)	XM3B-□□22
Number of contacts	9,15,25,37	9,15,25,37

●XM2C Plugs with Right Angle Terminal

Shape	XM2C-□□12-132
Number of contacts	9,15,25,37

●Hood/Solder Cup Terminal

Shape	Hood XM2S-□□13 with accessory	Plug XM2A-□□01	Socket XM2D-□□01
Number of contacts	9,15,25,37	9,15,25,37	9,15,25,37