

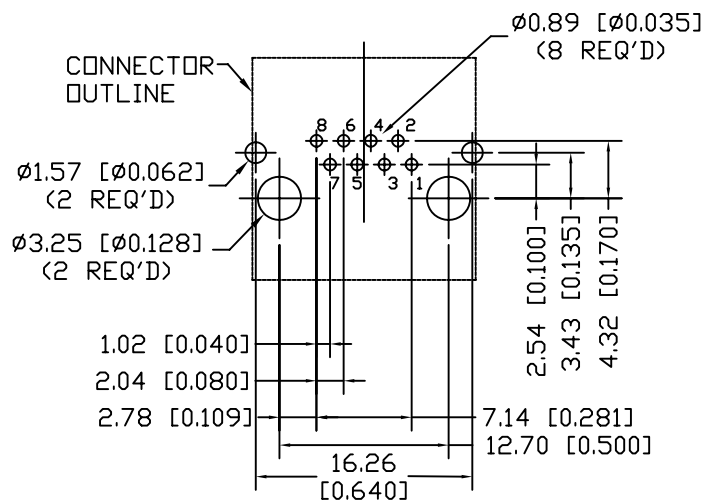


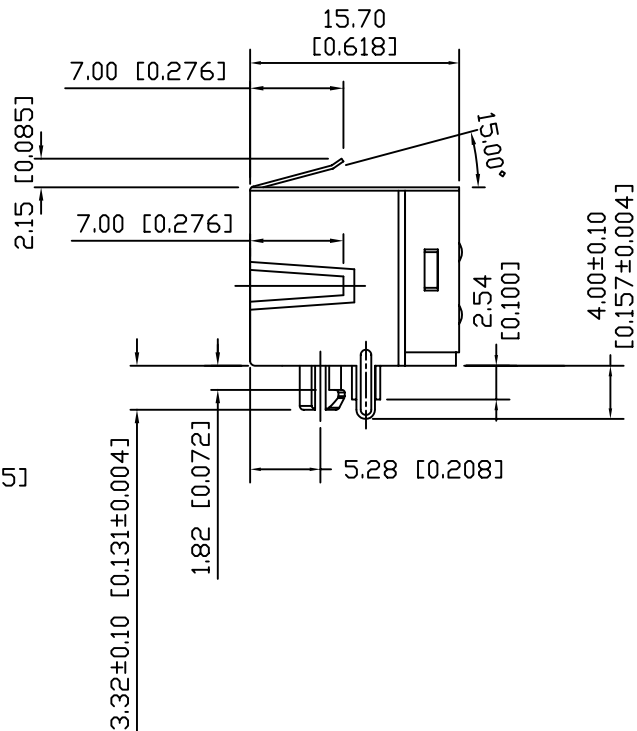

SUGGESTED PCB LAYOUT
(TOP VIEW)

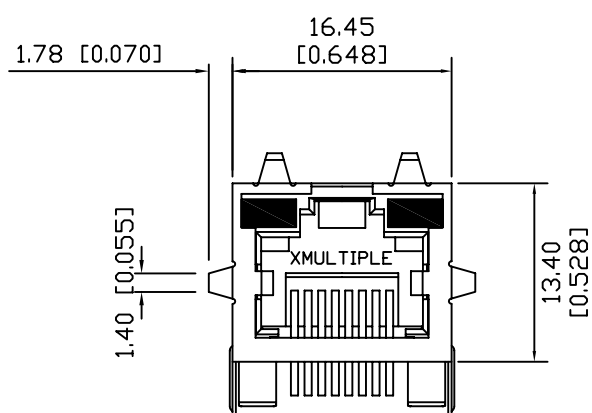

XRJM-S-01-8-8-0

Shielded Plating Type
S SHIELDED


M-[Thru Hole]

LED COLOR OPTION

NO. OF CONTACT

NO. OF POSITION

NO. OF PORTS

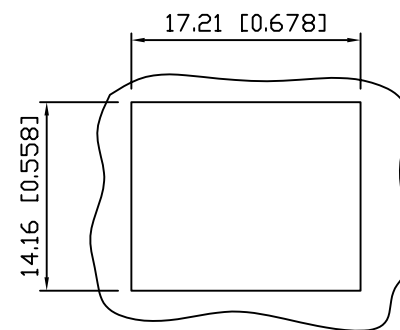

RECOMMENDED
PANEL CUTOUT DIMENSION

NOTES:

- MATERIALS:
HOUSING: HIGH TEMP. THERMOPLASTIC, BLACK, UL 94V-0
CONTACTS: 0.014 INCHES (0.35 MILLIMETERS) THICK PHOSPHOR BRONZE PLATED WITH 100 μ (2.54 MICROMETERS) MINIMUM THICK TIN IN SOLDER AREA.
15 μ (0.38 MICROMETERS) MINIMUM GOLD IN LOCALIZED PLATE AREA.
ENTIRE CONTACTS PLATED WITH 50 μ (1.27 MICROMETERS) MINIMUM THICK NICKEL.
SHIELDED: 0.0098 INCHES (0.25 MILLIMETERS) THICK COPPER ZINC ALLOY PLATED WITH NICKEL.
- JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS PART 68, SUBPART F
- OPERATING TEMPERATURE: -45°C~+85°C
- UNSPECIFIED TOLERANCE: .XX $\pm$ 0.25[0.010]
.X $\pm$ 0.30[0.012]

RoHS Compliant

X MULTIPLE				CONNECTING THE INFORMATION AGE	
XMULTIPLE ASIA 4F, No. 347, Yang Guang St., Neihu Chiu, Taipei, Taiwan 11475		XMULTIPLE USA 1420 Los Angeles Ave., Suite G, Simi Valley, CA 93065		CUSTOMER/NO:	
THIS DRAWING IS A CONTROLLED DOCUMENT.				DWG NO: XRJM-S-01-8-8-0	
TITLE: RJ45 Connectors, W/O LED, 8P, 8C, Shielded, Thru-Hole				DRAWN: NANCY	
PART NO:		XRJM-S-01-8-8-0		CHKD: JEFF	
		DIMENSIONS	SHEET	REV	DATE:
mm[inch]		1 of 1	E		13/09/05