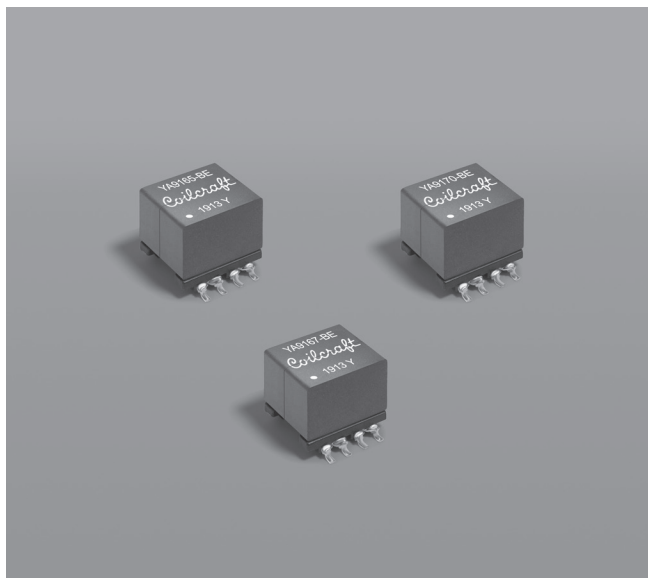


NEW!

Flyback Transformers

For Maxim
MAX17690 DCM
Flyback Controller

- Designed for Maxim Integrated MAX17690 60 V No-Opto Isolated Flyback Controller
- Discontinuous conduction mode Flyback transformers
- Optimized for 125 – 150 kHz with 8 – 28 V or 18 – 60 V input
- 1500 Vrms, one minute isolation between primary and secondary

Core material Ferrite**Terminations** RoHS tin-silver-copper over tin over nickel over phos bronze. Other terminations available at additional cost.**Weight** 4.27 – 4.60 g**Ambient temperature** –40°C to +85°C**Max Part Temperature** +125°C (ambient + temperature rise)**Storage temperature** Component: –40°C to +125°C

Tape and reel packaging: –40°C to +80°C

Resistance to soldering heat Max three 40 second reflows at +260°C, parts cooled to room temperature between cycles**Moisture Sensitivity Level (MSL)** 1 (unlimited floor life at <30°C / 85% relative humidity)**Failures in Time (FIT) / Mean Time Between Failures (MTBF)**

38 per billion hours / 26,315,789 hours, calculated per Telcordia SR-332

PCB washing Tested to MIL-STD-202 Method 215 plus an additional aqueous wash. See [Doc787_PCB_Washing.pdf](#).

Part number ¹	Inductance at 0 A ² ±10% (µH)	Isat ³ (A)	DCR max (Ohms)		Leakage inductance max (µH) ⁴	Turns ratio pri : sec	Isolation ⁵ (Vrms)	Power (W)	Output
			pri	sec					
8 – 28 V input									
YA9165-BED	4.0	13.0	0.0156	0.0144	0.15	1 : 0.70	1500	12	5 V, 2.40 A
YA9166-BED	4.0	13.0	0.0156	0.0598	0.12	1 : 1.60	1500	12	12 V, 1 A
YA9167-BED	4.0	13.0	0.0156	0.1900	0.12	1 : 3.14	1500	12	24 V, 0.50 A
18 – 60 V input									
YA9168-BED	20.0	4.7	0.0360	0.0120	0.40	1 : 0.31	1500	12	5 V, 2.40 A
YA9169-BED	20.0	4.7	0.0380	0.0540	0.28	1 : 0.71	1500	12	12 V, 1 A
YA9170-BED	20.0	4.7	0.0360	0.1950	0.28	1 : 1.39	1500	12	24 V, 0.50 A

1. **Packaging:** D = 13" machine-ready reel. EIA-481 embossed plastic tape. Quantities less than full reel available: in tape (not machine ready) or with leader and trailer (\$25 charge).

2. Inductance is for the primary, measured at 150 kHz, 0.1 Vrms, 0 Adc.

3. DC current that causes the primary inductance drop 30% from its value without current. [Click for temperature derating information.](#)


4. Leakage Inductance is for the primary, measured with secondary windings shorted together.

5. 1500 Vrms, one minute isolation (hipot) between windings.

6. Electrical specifications at 25°C.


Refer to Doc 362 "Soldering Surface Mount Components" before soldering.

Schematics

YA9165, YA9166,
YA9167, YA9170

*Connect pin 1 to 2 and pin 3 to 4 on the PC board

YA9168, YA9169



*Connect pin 1 to 2, 3 to 4, 5 to 6, and pin 7 to 8 on the PC board



www.coilcraft.com

US +1-847-639-6400 sales@coilcraft.com

UK +44-1236-730595 sales@coilcraft-europe.com

Taiwan +886-2-2264 3646 sales@coilcraft.com.tw

China +86-21-6218 8074 sales@coilcraft.com.cn

Singapore +65-6484 8412 sales@coilcraft.com.sg

Document 1531-1 Revised 10/09/19



© Coilcraft Inc. 2019

This product may not be used in medical or high risk applications without prior Coilcraft approval. Specification subject to change without notice. Please check web site for latest information.





Flyback Transformers

L vs Current

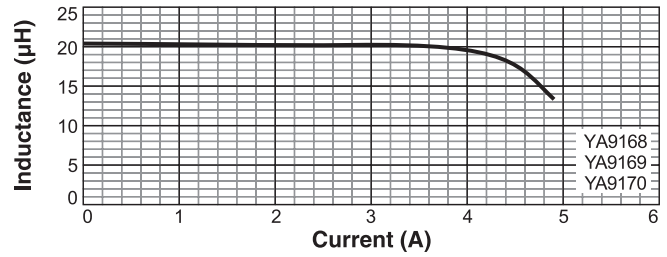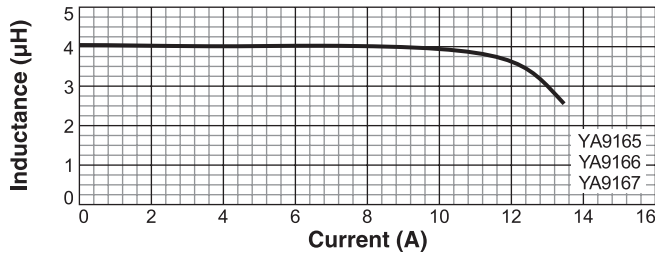

Dimensions

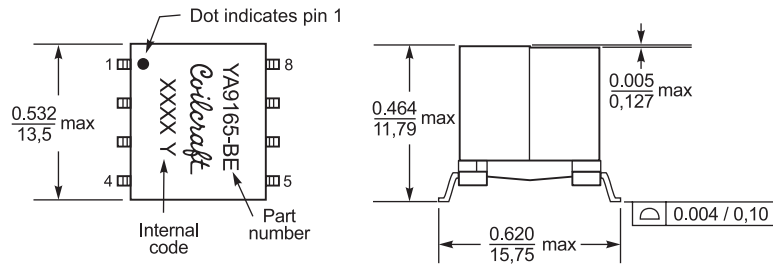

Recommended Land Pattern

Dimensions are in $\frac{\text{inches}}{\text{mm}}$

Packaging 200/13" reel Plastic tape: 32 mm wide, 0.50 mm thick, 24 mm pocket spacing, 12 mm pocket depth



US +1-847-639-6400 sales@coilcraft.com
UK +44-1236-730595 sales@coilcraft-europe.com
Taiwan +886-2-2264 3646 sales@coilcraft.com.tw
China +86-21-6218 8074 sales@coilcraft.com.cn
Singapore + 65-6484 8412 sales@coilcraft.com.sg

Document 1531-2 Revised 10/09/19

© Coilcraft Inc. 2019
 This product may not be used in medical or high risk applications without prior Coilcraft approval. Specification subject to change without notice. Please check web site for latest information.