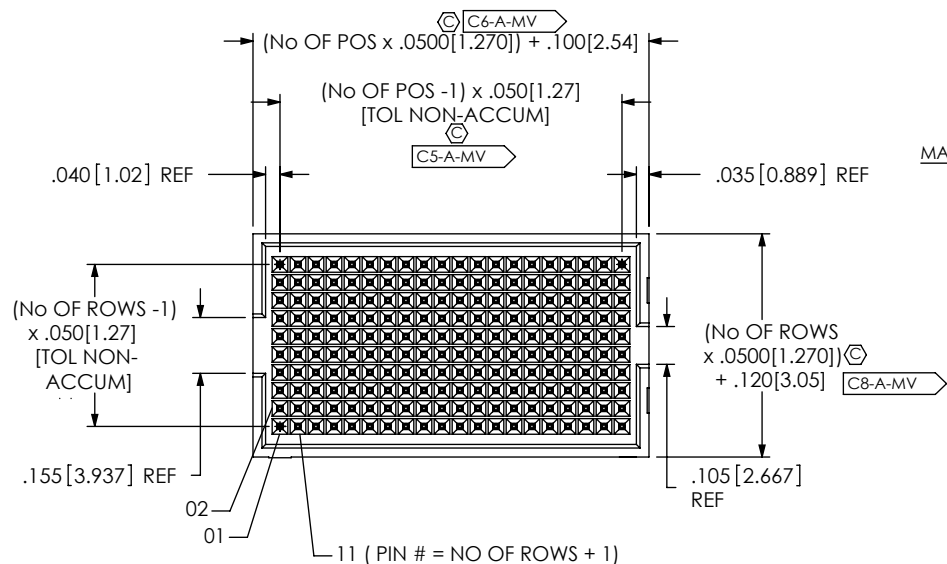


DO NOT
SCALE FROM
THIS PRINT

YFW-XX-XX-X-XX-XSB-XX

No OF POSITIONS
-20 THRU -50
(MULTIPLES OF 10 ONLY)

MATED STACK HEIGHT w/ YFS
-07: 7mm
-09: 9mm
-12: 12mm
-19: 19mm (SEE FIG. 2)
-25: 25mm (SEE FIG. 2)

PLATING SPECIFICATION
-H: HEAVY GOLD
(USE T-1R2X-XXB-H-1)
-E: EXTRA GOLD
(USE T-1R2X-XXB-E-1)

OPTION

** -K: KAPTON PAD (SEE FIG 3)
(AVAILABLE ON -07, -09 & -12
MATED STACKS ONLY)
-TR: TAPE & REEL
[STACK HEIGHT -07 & -09: ALL POSITIONS
-12: POSITIONS UP TO 40x10
-19 & -25: NOT AVAILABLE]
-P: PICK AND PLACE PAD (SEE FIG 4)

SOLDER BALLS

-SB: SOLDER BALLS (USE SDB-030-6337)
* -MSB: MODIFIED SOLDER BALLS- Pb FREE
(USE SDB-030-9653)

C3-B,I-XR

ROW SPECIFICATION

-05: FIVE ROWS
-08: EIGHT ROWS
(AVAILABLE ON -07, -09 & -12
MATED STACKS ONLY)
-10: TEN ROWS

**** DO NOT DESIGN IN FOR 10-ROW VERSION. ONLY EXISTING CUSTOMERS, AS OF 2/10/06, WILL BE SUPPORTED. -P OPTION SHOULD BE USED FOR 10-ROW VERSION.**

*** = NOT RELEASE FOR PRODUCTION.**




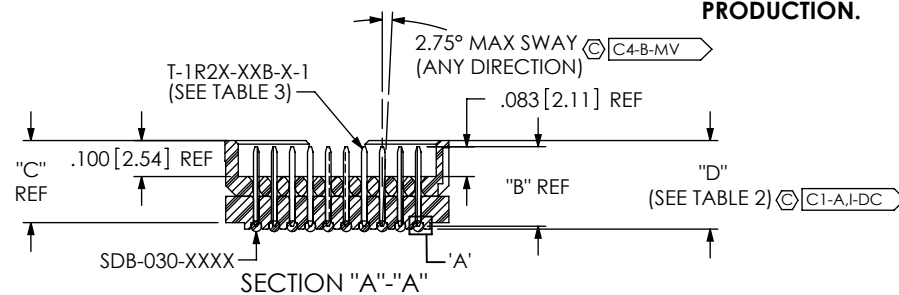


FIG 1
YFW-20-07-X-10-SB SHOWN
[STACK HEIGHT -09 & -12 SIMILAR]

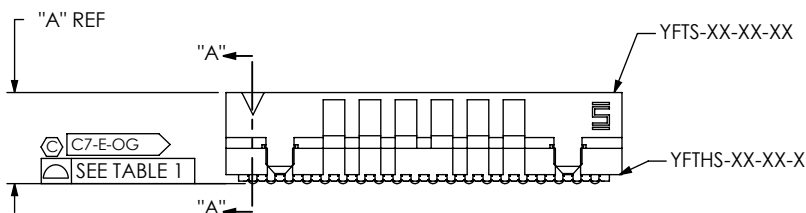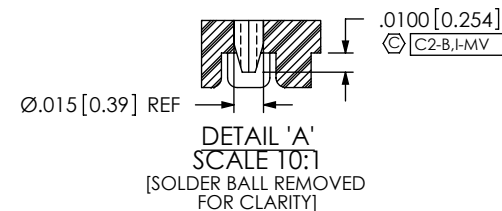

NOTES:

1. C REPRESENTS A CRITICAL DIMENSION.
2. BURR ALLOWANCE: .0015[.038] MAX.
3. MINIMUM PUSHOUT FORCE: PRE-PROCESS: 8 OZ, POST-PROCESS: 5 OZ.
4. MAXIMUM ALLOWABLE BOW; TOP/BOTTOM: .006[.15], SIDE/SIDE: .003[.08].
5. ALL DIMS TO BE SYMMETRICAL ABOUT CENTERLINE WITHIN ±.002[.05].
6. BODY RETENTION BETWEEN WELDED BODIES TO BE 4 LBS MINIMUM TOTAL.
7. WELD FLASH: .020[.51] MAX.
8. -H PLATING MAY BE SUBSTITUTED FOR -G PLATING.
9. NOTE DELETED.
10. TRAY PACKAGING CAN BE SUBSTITUTED FOR TUBES.

No OF POS	ROW SPEC	COPLANARITY
-20	-05	.004[.10]
-30	-05	.006[.15]
-20 & -30	-08, -10	.006[.15]
-40	-05, -08, -10	.008[.20]
-50	-05	.008[.20]
-50	-08, -10	.010[.25]

STACK HEIGHT	"A" REF	"B" REF	"C"	"D"	MATED HEIGHT w / YFS
-07	.258[6.55]	.221[5.61]	.228[5.79]	.246[6.25]	.276[7.00]
-09	.335[8.51]	.299[7.59]	.306[7.77]	.324[8.23]	.354[9.00]
-12	.453[11.51]	.417[10.59]	.424[10.77]	.442[11.23]	.472[12.00]
-19	.728[18.49]	.692[17.58]	.699[17.75]	.717[18.21]	.748[19.00]
-25	.964[24.49]	.928[23.57]	.935[23.75]	.953[24.21]	.984[25.00]

STACK HEIGHT	TERMINAL	USE YFTS	USE YFTM	USE YFTHS
-07	T-1R24-07B-X-1	YFTS-XX-01-XX	N/A	YFTHS-XX-XX-X
-09	T-1R24-09B-X-1	YFTS-XX-02-XX	N/A	YFTHS-XX-XX-X
-12	T-1R27-12B-X-1	YFTS-XX-03-XX	N/A	YFTHS-XX-XX-X
-19	T-1R27-19B-X-1	YFTS-XX-01-XX	YFTM-XX-19-XX	YFTHS-XX-XX-X
-25	T-1R27-25B-X-1	YFTS-XX-01-XX	YFTM-XX-25-XX	YFTHS-XX-XX-X

ROW	USE YFTS	USE YFTM	USE YFTHS
-05	YFTS-XX-XX-05	YFTM-XX-XX-05	YFTHS-XX-XX-05-X
-08	YFTS-XX-XX-08		YFTHS-XX-XX-08-X
-10	YFTS-XX-XX-10	YFTM-XX-XX-10	YFTHS-XX-XX-10-X

CPC
FREQUENCY
THIS SHEETA C1, C5, C6,
C8, C9

B C2, C3, C4

C

D

E C7

UNLESS OTHERWISE SPECIFIED,
DIMENSIONS ARE IN INCHES.

TOLERANCES ARE:

DECIMALS ANGLES
.XX: ±.01[.3]
.XXX: ±.005[.13]
.XXXX: ±.0020[.051]

PROPRIETARY NOTE

THIS DOCUMENT CONTAINS INFORMATION
CONFIDENTIAL AND PROPRIETARY TO
SAMTEC, INC. AND SHALL NOT BE REPRODUCED
OR TRANSFERRED TO OTHER DOCUMENTS OR
DISCLOSED TO OTHERS OR USED FOR ANY
PURPOSE OTHER THAN THAT WHICH IT WAS
OBTAINED WITHOUT THE EXPRESSED WRITTEN
CONSENT OF SAMTEC, INC.

MATERIAL: DO NOT SCALE DRAWING
INSULATOR: LCP, COLOR: BLACK
TERMINAL: BRASS
SOLDER BALL: 63% TIN/ 37% LEAD

SHEET SCALE: 1.875:1

DESCRIPTION:

Flex, Y, Z, .050 CENTERLINE TERMINAL ASSEMBLY

DWG. NO.

YFW-XX-XX-X-XX-XSB-XX

BY: DEAN P

5/11/2001



SHEET 1 OF 4

samtec

520 PARK EAST BLVD, NEW ALBANY, IN 47150
PHONE: 812-944-6733 FAX: 812-948-5047
e-Mail: info@SAMTEC.com code: 55322

FIG 2

YFW-20-19-X-10-SB SHOWN
[STACK HEIGHT -25 SIMILAR]
(DIFFERENT AS SHOWN, OTHERWISE SAME AS FIG 1)

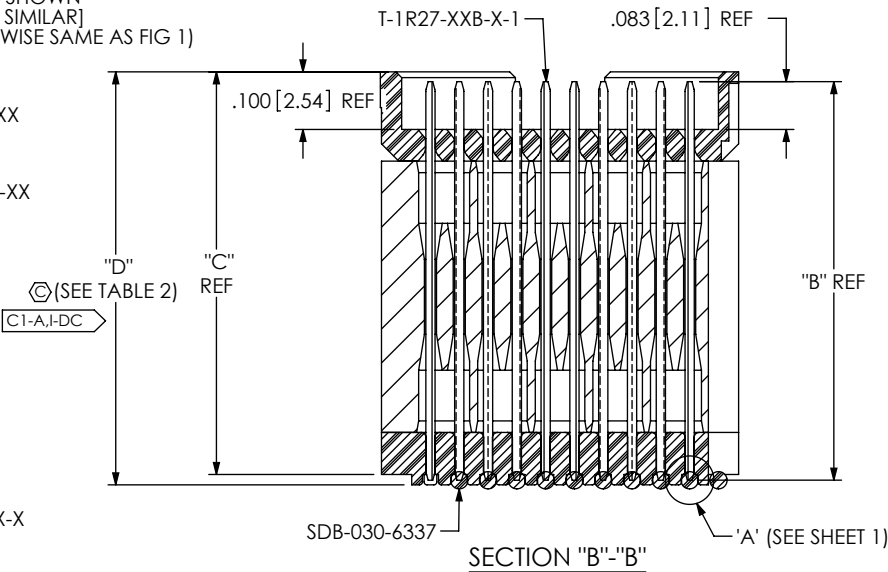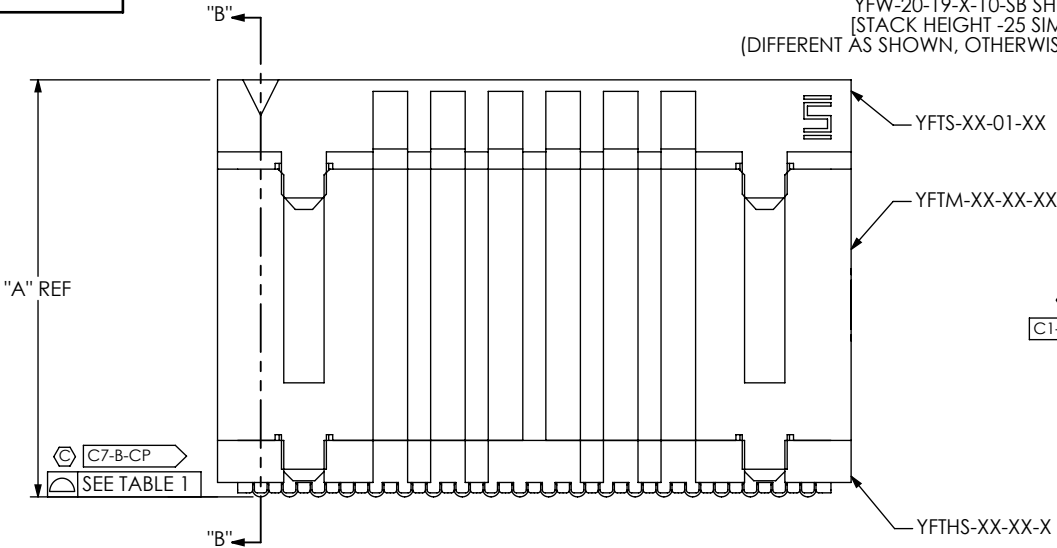

IN-PROCESS 1

STACK HEIGHT -07, -09 & -12


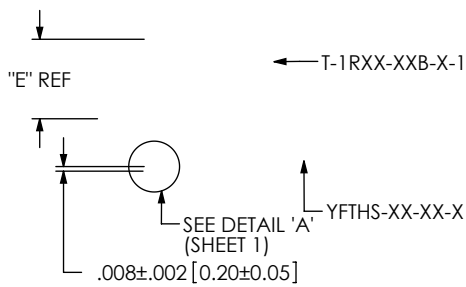


TABLE 5

STACK HEIGHT	"E"
-07	.138[3.51]
-09	.216[5.49]
-12	.334[8.48]

IN-PROCESS 4

RE-PRESS
STACK HEIGHT -19 & -25



IN-PROCESS 1 & 2

STACK HEIGHT -19 & -25


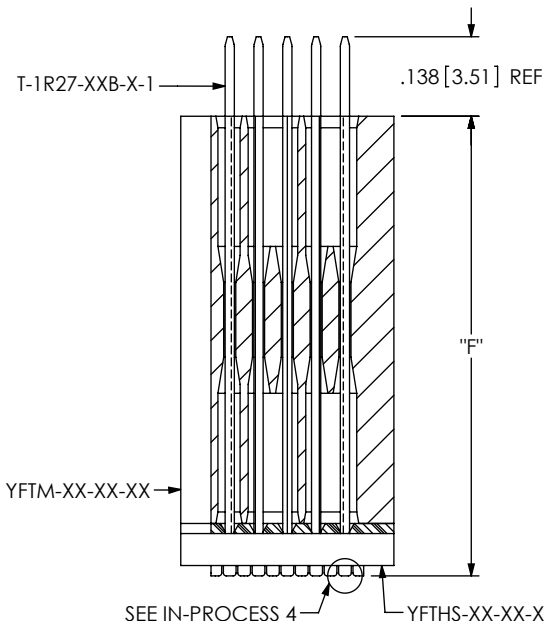


TABLE 6

STACK HEIGHT	"F"
-19	.5620[14.275]
-25	.7980[20.269]

IN-PROCESS 3

STACK HEIGHT -19 & -25

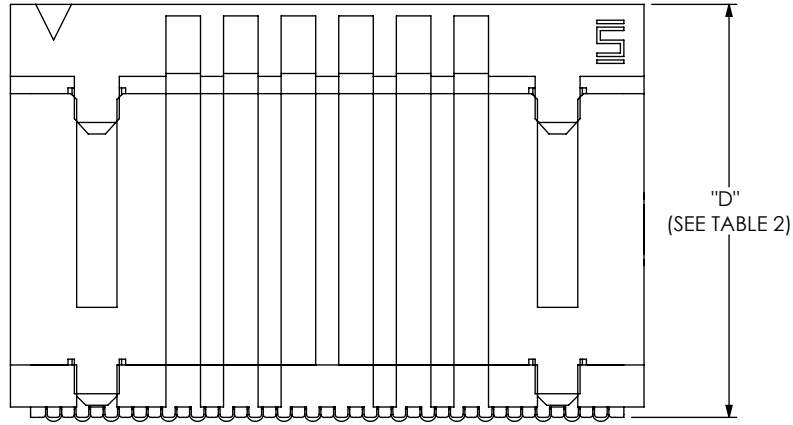

CPC FREQUENCY THIS SHEET	
A	C1
B	C7
C	
D	

PROPRIETARY NOTE
THIS DOCUMENT CONTAINS INFORMATION
CONFIDENTIAL AND PROPRIETARY TO
SAMTEC, INC. AND SHALL NOT BE REPRODUCED
OR TRANSFERRED TO OTHER DOCUMENTS OR
DISCLOSED TO OTHERS OR USED FOR ANY
PURPOSE OTHER THAN THAT WHICH IT WAS
OBTAINED WITHOUT THE EXPRESSED WRITTEN
CONSENT OF SAMTEC, INC.

DO NOT SCALE DRAWING

SHEET SCALE: 1.875:1




520 PARK EAST BLVD, NEW ALBANY, IN 47150
PHONE: 812-944-6733 FAX: 812-948-5047
e-Mail: info@SAMTEC.com code: 55322

DESCRIPTION:
Flex, Y, Z, .050 CENTERLINE TERMINAL ASSEMBLY

DWG. NO.
YFW-XX-XX-X-XX-XSB-XX

BY: DEAN P 5/11/2001 SHEET 2 OF 4

REVISION AD

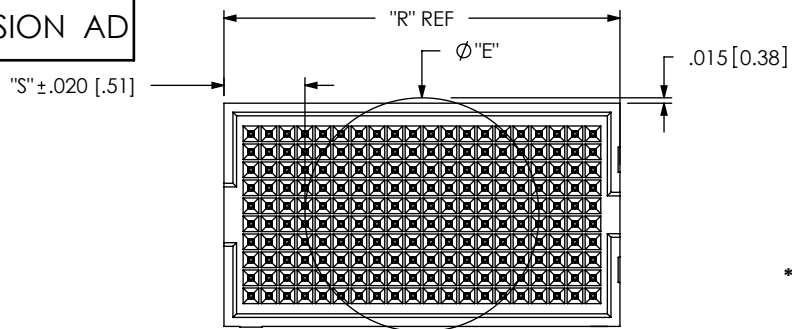

AD

FIG 3
-K: KAPTON PAD OPTION
YFW-20-XX-X-10-SB-K SHOWN
[KAPTON = .005 THICK]

TABLE 7

ROW OPTION	"E"	KAPTON TAPE
-05	.404 [10.25]	K-DOT-.404-.500-.005
-08	.550 [13.97]	K-850-650
-10**	.650 [16.50]	K-1000-800


** DO NOT DESIGN IN FOR 10-ROW VERSION. ONLY EXISTING CUSTOMERS, AS OF 2/10/06, WILL BE SUPPORTED. -P OPTION SHOULD BE USED FOR 10-ROW VERSION.

"R" = (No OF POSITIONS x .0500[1.270]) + .100[2.54]
"S" = ("R" - "E" / 2)


PACKAGING TUBE (SEE NOTE 10)

(PARTS TO HAVE POSITION #1 LOADED IN
SAME DIRECTION AS ARROW ON TUBE)


-08 ROW
YFW-XX-09-X-08-SB-K SHOWN



-08 ROW
YFW-XX-09-X-08-SB-P SHOWN



TAPE AND REEL VIEW

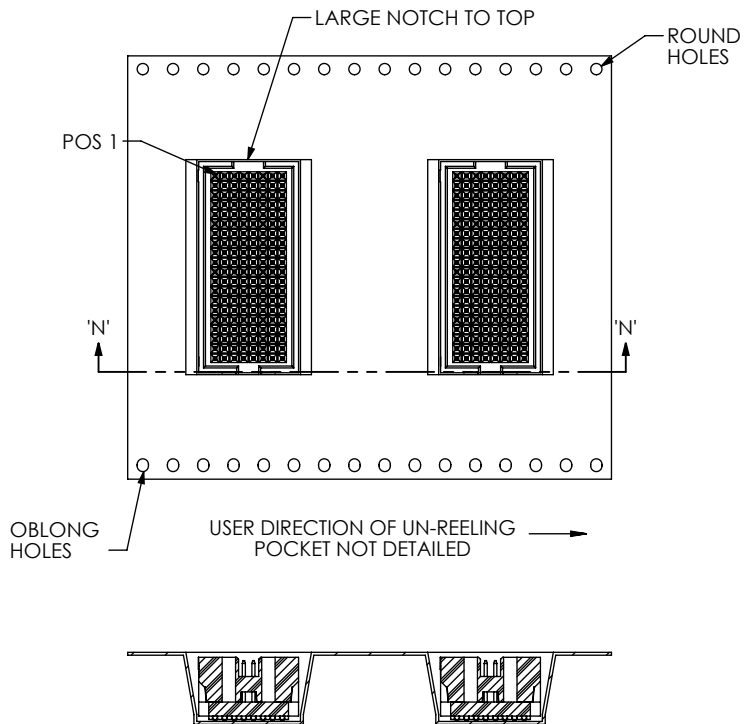

SECTION 'N'-N'
SCALE 1:1

PACKAGING TUBES

ROW	STACK HEIGHT	TUBE W/ NONE, -K	TUBE W/ -P	PLUG
-05	-07	PT-1-24-07F-109	PT-YFW-07F-P	TP-29
-05	-09	PT-1-24-09F-109	PT-YFW-09F-P	TP-29
-05	-12	PT-YFW-12F-P	PT-YFW-12F-P	TP-13
-05	-19	PT-1-24-19F-109	PT-1-24-01-131	TP-13
-05	-25	PT-1-24-25F-109	PT-YFW-25F-P	TP-29
-08	-07	PT-YFW-07E-P	PT-YFW-07E-P	TP-13
-08	-09	PT-1-24-09E-109	PT-YFW-09E-P	TP-29
-08	-12	PT-1-24-12E-109	PT-YFW-12E-P	TP-29
-10	-07	PT-1-24-07T-109	PT-1-24-07T-109	TP-13
-10	-09	PT-1-24-09T-109	PT-YFW-09T-P	TP-13
-10	-12	PT-1-24-12T-109	PT-YFW-12T-P	TP-28
-10	-19	PT-1-24-19T-109	PT-YFW-19T-P	TP-26
-10	-25	PT-1-24-25T-109	PT-YFW-25T-P	TP-28

F:\DWG\MISC\mktg\YFW-XX-XX-X-XX-XSB-XX-MKT.SLDDRW

CPC FREQUENCY THIS SHEET
A
B
C
D

PROPRIETARY NOTE

THIS DOCUMENT CONTAINS INFORMATION
CONFIDENTIAL AND PROPRIETARY TO
SAMTEC, INC. AND SHALL NOT BE REPRODUCED
OR TRANSFERRED TO OTHER DOCUMENTS OR
DISCLOSED TO OTHERS OR USED FOR ANY
PURPOSE OTHER THAN THAT WHICH IT WAS
OBTAINED WITHOUT THE EXPRESSED WRITTEN
CONSENT OF SAMTEC, INC.

DO NOT SCALE DRAWING

SHEET SCALE: 1.875:1

samtec

520 PARK EAST BLVD, NEW ALBANY, IN 47150
PHONE: 812-944-6733 FAX: 812-948-5047
e-Mail: info@SAMTEC.com code: 55322

DESCRIPTION:

Flex, Y, Z, .050 CENTERLINE TERMINAL ASSEMBLY

DWG. NO.

YFW-XX-XX-X-XX-XSB-XX


BY: DEAN P

5/11/2001

SHEET 3 OF 4

FIG 4

-P: PICK AND PLACE OPTION

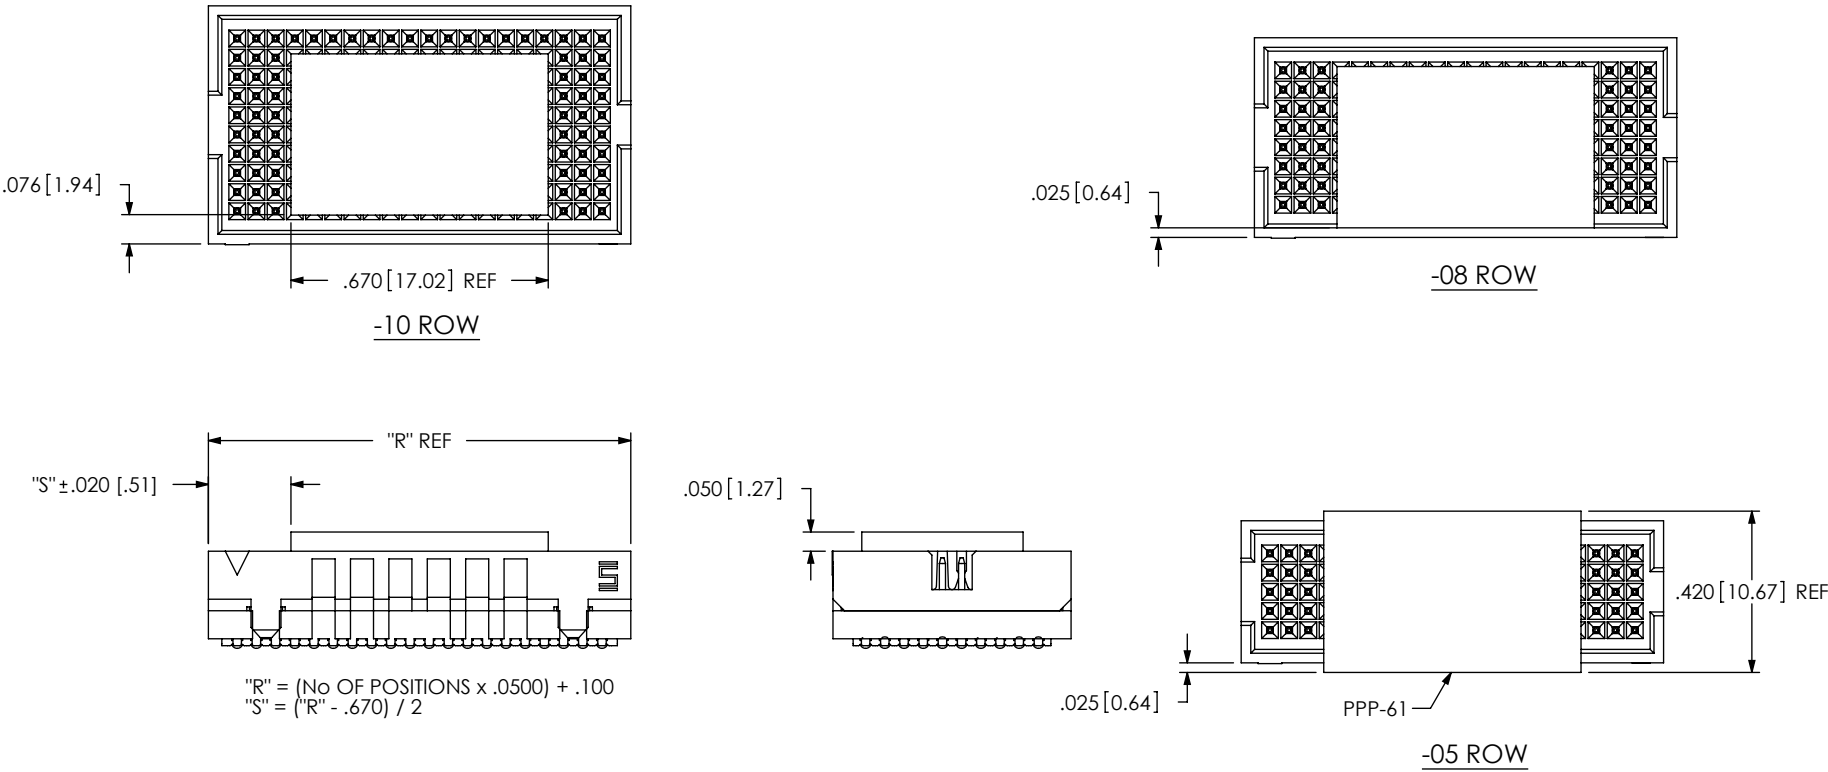

CRITICAL DIMENSION INSPECTION INSTRUCTION TABLE	
ASSEMBLY OPERATION	IN-PROCESS INSPECTION
FILL T-1R2X-XXX-X-X	C2, C5, C6, C8
MOUNT YFTS-XX-XX-XX	C1, C4, C9
FINISHED GOOD INSPECTION	C1, C3, C4, C5, C6, C8, C9

CPC FREQUENCY THIS SHEET		PROPRIETARY NOTE THIS DOCUMENT CONTAINS INFORMATION CONFIDENTIAL AND PROPRIETARY TO SAMTEC, INC. AND SHALL NOT BE REPRODUCED OR TRANSFERRED TO OTHER DOCUMENTS OR DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE OTHER THAN THAT WHICH IT WAS OBTAINED WITHOUT THE EXPRESSED WRITTEN CONSENT OF SAMTEC, INC. DO NOT SCALE DRAWING SHEET SCALE: 2:1	samtec 520 PARK EAST BLVD, NEW ALBANY, IN 47150 PHONE: 812-944-6733 FAX: 812-948-5047 e-Mail: info@SAMTEC.com code: 55322	DESCRIPTION: Flex, Y, Z, .050 CENTERLINE TERMINAL ASSEMBLY	
A				DWG. NO.	YFW-XX-XX-X-XX-XSB-XX
B				BY: DEAN P	5/11/2001
C				SHEET 4 OF 4	
D					