

# HSC15018KJ ✓ ACTIVE

CGS | CGS HS

TE Internal #: 1-1630012-5


18K ohm, Wire Wound, 5 %, Power Resistor, 150 W, 2 Terminations,  
±30 ppm/°C, Solder Lug, Loose Piece - Tray, 26 mm [1.024 in]

Height, CGS HS

[View on TE.com >](#)



Passive Components > Resistors > Chassis Mount Resistors > Power Resistors: Aluminum Housed, HSA

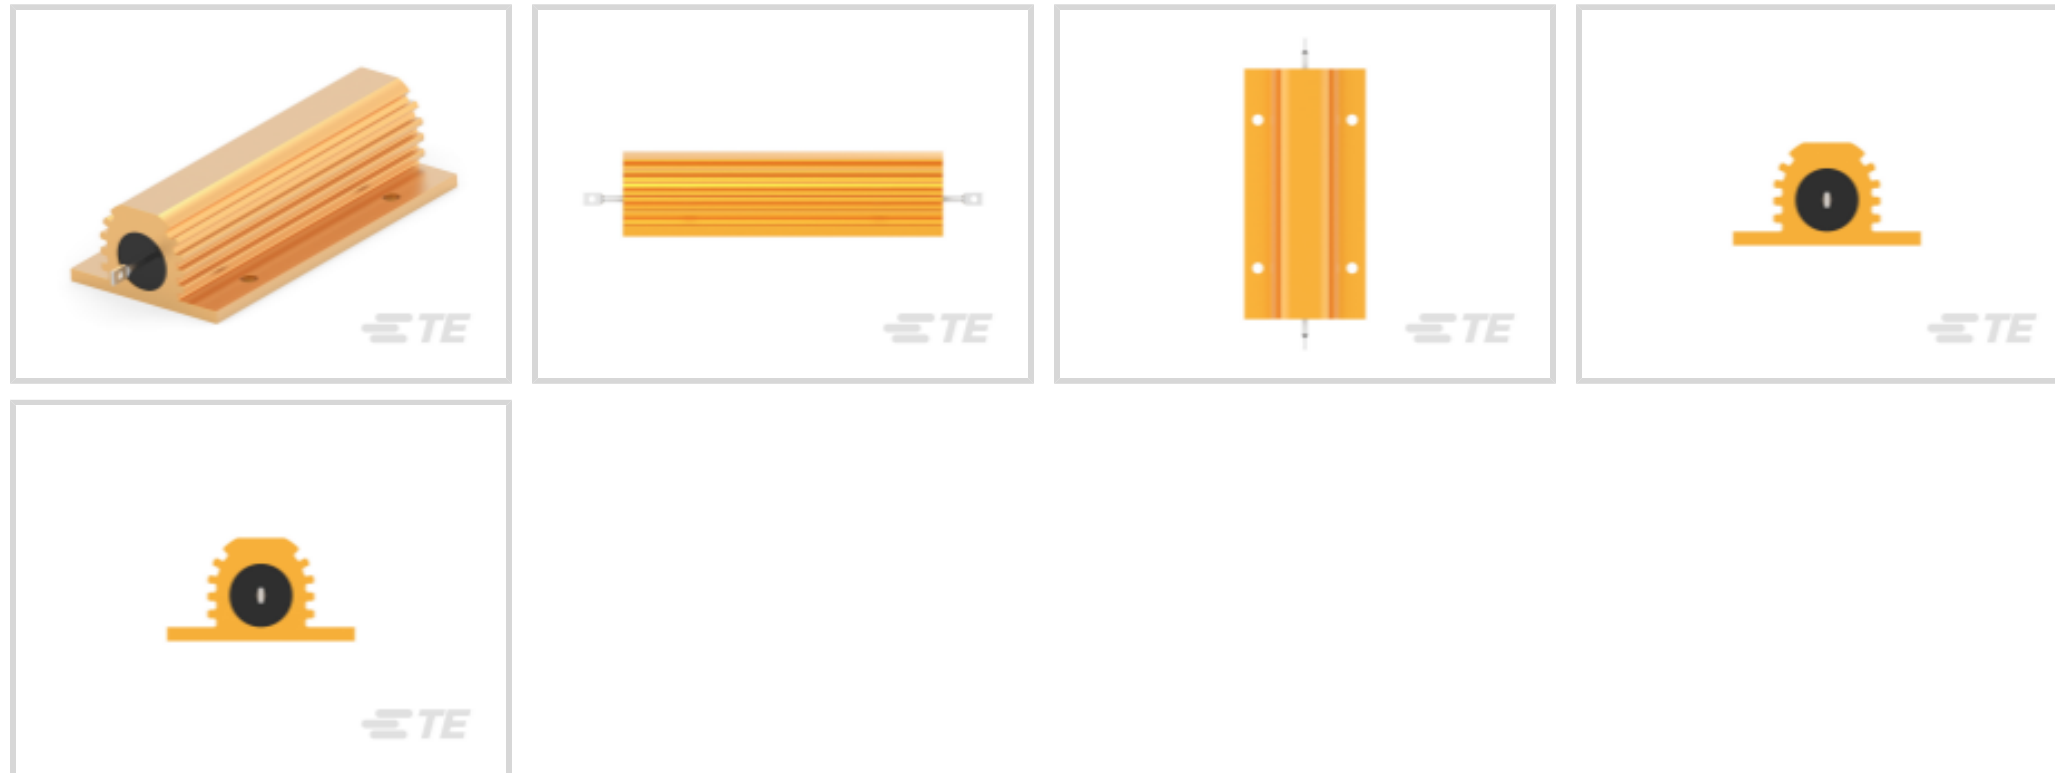

Resistor Type: **Power Resistor**

Resistance Class: **1kΩ – 1MΩ**

Resistance Value: **18K Ω**

Power Rating: **150 W**

Element Type: **Wire Wound**

[All Power Resistors: Aluminum Housed, HSA \(384\)](#)

## Features

### Product Type Features

Resistor Type	Power Resistor
Element Type	Wire Wound

### Configuration Features

Number of Resistors	1
---------------------	---

### Electrical Characteristics

Operating Voltage	2500 VDC
Resistance Class	1kΩ – 1MΩ
Resistance Value	18K Ω
Power Rating	150 W
Passive Component Tolerance	5 %

### Termination Features

Number of Terminations	2
------------------------	---

Chassis Mount Resistor Termination Type

Solder Lug

### Mechanical Attachment

Panel Mount Feature Type

Flange with Mounting Holes

### Dimensions

Product Height

26 mm[1.024 in]

Product Length

122 mm[4.803 in]

Product Width

47.5 mm[1.87 in]

### Usage Conditions

Temperature Coefficient

 $\pm 30$  ppm/ $^{\circ}$ C

### Packaging Features

Packaging Method

Loose Piece - Tray

## Product Compliance

For compliance documentation, visit the product page on [TE.com](https://www.te.com)>

EU RoHS Directive 2011/65/EU

Compliant

EU ELV Directive 2000/53/EC

Compliant

China RoHS 2 Directive MIIT Order No 32, 2016

有害物质含量符合标准要求 No Restricted Substance(s) Above Threshold

EU REACH Regulation (EC) No. 1907/2006

Current ECHA Candidate List: JUNE 2025 (250)  
 Candidate List Declared Against: JUN 2020 (209)  
 Does not contain REACH SVHC

Halogen Content

Not Yet Reviewed for halogen content

Solder Process Capability

Hand solderable with lead free solder

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

## Compatible Parts



TE Part # 1630027-1  
HSC300 100R 5%




TE Part # CAT-C339-H85913  
Power Resistor: Aluminum Housed, HSA



TE Part # 1625999-3  
HSC100 10R 5%


## Also in the Series | CGS HS



Automotive Housings(1)



Automotive Signal & Power Connector Housings(1)



Card Edge Connector Housings(1)



Chassis Mount Resistors(1069)



FFC Connectors(1)

## Customers Also Bought



TE Part #154807-E  
SMCB 50 F AB VV 7-13 CL \* H007 137 E002



TE Part #33465  
TERMINAL,SOLIS R 6 1/4



TE Part #104742-2  
PLUGGABLE BUSBAR 062F2 POWER CONNECTOR



TE Part #132104-2  
TERMINAL RING TONGUE SOLISTRAN



## Documents

### Product Drawings

[HSC150 18K 5%](#)

English

### CAD Files

Customer View Model

[ENG\\_CVM\\_CVM\\_1-1630012-5\\_S1.3d\\_igs.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_1-1630012-5\\_S1.2d\\_dxf.zip](#)

English

[3D PDF](#)

3D

Customer View Model

[ENG\\_CVM\\_CVM\\_1-1630012-5\\_S1.3d\\_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

### Datasheets & Catalog Pages

[4-1773460-6\\_RESISTIVE\\_SOLUTIONS\\_RAIL](#)

English

[1309350\\_PASSIVE\\_COMPONENT](#)

English

[Aluminium Housed Power Resistors - Type HS Series](#)

English

[8-1773459-4\\_POWER\\_FILTERING\\_AND\\_RESISTIVE\\_SOLUTIONS\\_FOR\\_ELEVATORS\\_AND\\_ESCALATORS](#)

English

HSC15018KJ

18K ohm, Wire Wound, 5 %, Power Resistor, 150 W, 2 Terminations,  $\pm 30$  ppm/ $^{\circ}$ C,  
Solder Lug, Loose Piece - Tray, 26 mm [1.024 in] Height, CGS HS

