


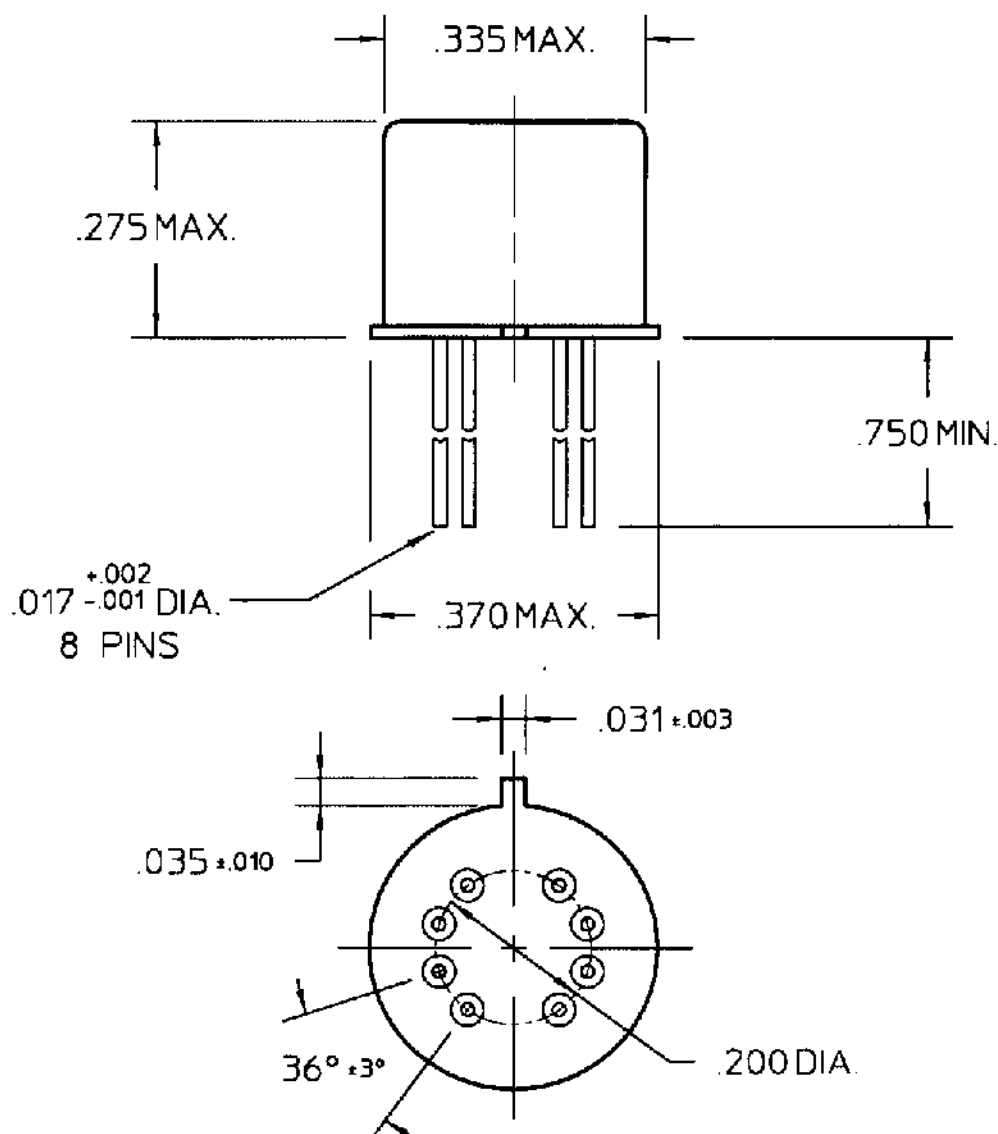


COIL: @ 25°C  
 RESISTANCE \_\_\_\_\_ 50 OHMS  $\pm$  10%  
 NOMINAL VOLTAGE \_\_\_\_\_ 5.0 VDC  
 MUST OPERATE \_\_\_\_\_ 3.6 VDC  
 MUST RELEASE \_\_\_\_\_

ENVIRONMENT:

VIBRATION \_\_\_\_\_ 10 \_\_\_\_\_ CPS TO \_\_\_\_\_ 500 \_\_\_\_\_ CPS @ \_\_\_\_\_ 10 \_\_\_\_\_ g's  
 SHOCK \_\_\_\_\_ 30 \_\_\_\_\_ g's \_\_\_\_\_ 6 \_\_\_\_\_ MS. DURATION  
 TEMPERATURE \_\_\_\_\_ -55 \_\_\_\_\_ °C TO \_\_\_\_\_ +85 \_\_\_\_\_ °C

NOTES: \_\_\_\_\_ OPERATE TIME 4.0 MS MAX.  
 \_\_\_\_\_ RELEASE TIME 6.0 MS MAX.  
 \_\_\_\_\_  
 \_\_\_\_\_

CUSTOMER DATA SHEET



CONTACT RATING: \_\_\_\_\_ LOW LEVEL TO 1A  
 \_\_\_\_\_ 28 VDC RESISTIVE 100,000 OPERATIONS

DR. R.B. 4/28/98 *ERD* 4/21/98

**COMMUNICATIONS**  
**INSTRUMENTS, INC.**

**HMD-5B**

CUST. \_\_\_\_\_ C. I. I. STD.  
 CUST. NO. \_\_\_\_\_

TYPE HMD RELAY