


**Part Number :** [150670320](#)

**Product Description :** 1.00mm Pitch Premo-Flex Hot Bar Solder FFC Jumpers, Same Side Contacts (Type A), 76.00mm Cable Length, Tin (Sn) Plating, 20 Circuits

**Series Number :** 15067

**Status :** Active

**Product Category :** Flat-Flexible Cable (FFC)

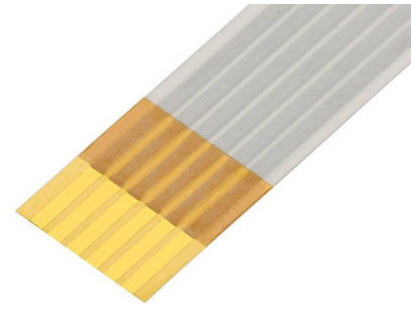

---

## Documents and Resources

### Drawings

[150670320 sd.pdf](#)


### Specifications

[150670001-000.pdf](#)

---

## Product Environment Compliance

### Compliance

GADSL/IMDS	Not Relevant
China RoHS	 per SJ/T 11365-2006
EU ELV	Not Relevant
Low-Halogen Status	Not Low-Halogen per IEC 61249-2-21
REACH SVHC	Not Contained per D(2025)6375-DC (05 Nov 2025)
EU RoHS	Compliant per EU 2015/863

### Compliance Statements

- EU RoHS
- REACH SVHC
- Low-Halogen

### Industry Documents

- IPC 1752A Class C
- IPC 1752A Class D
- Molex Product Compliance Declaration
- IEC-62474

- chemSHERPA (xml)

Substances of Interest

- PFAS

EU RoHS Certificate of Compliance

Additional Product Compliance Information

---

## Part Details

### General

Status	Active
Category	Flat-Flexible Cable (FFC)
Series	15067
Description	1.00mm Pitch Premo-Flex Hot Bar Solder FFC Jumpers, Same Side Contacts (Type A), 76.00mm Cable Length, Tin (Sn) Plating, 20 Circuits
Comments	Contacts on the same side, Type A
Product Name	Premo-Flex Hot Bar Solder FFC Jumper
UPC	196823685880

### Electrical

Current - Maximum per Contact	1.25A
Voltage - Maximum	60V AC

### Physical

Cable Length	76.00mm
Circuits (Loaded)	20
Contact Layout Type	A (same side)
Design Feature	Direct to Board
Material - Plating Mating	Tin
Packaging Type	Bag
Pitch - Mating Interface	1.00mm
Temperature Range - Operating	-40° to +105°C
Termination Style	Solder

Wire/Cable Type	Flat Flex Cable
Wire Size (AWG)	N/A

---

This document was generated on Feb 26, 2026