

Part Number : [386608810](#)


Product Description : 12.70mm Pitch Beau PCB Tri-Barrier Terminal Strip, without Mounting Ends, 600V, 10 Circuits

Series Number : 38660

Status : Obsolete

Product Category : Terminal Blocks and Barrier Strip

Engineering Part Number : 66510-RC

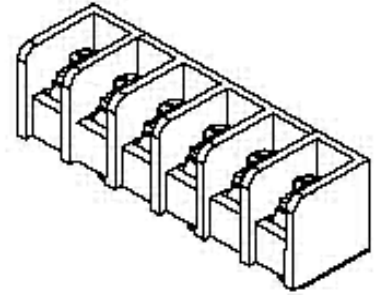

Documents and Resources

Product Environment Compliance

Compliance

| | |
|--------------------|--------------------|
| GADSL/IMDS | Product not active |
| China RoHS | Product not active |
| EU ELV | Product not active |
| Low-Halogen Status | Product not active |
| REACH SVHC | Product not active |
| EU RoHS | Product not active |

Compliance Statements

- EU RoHS
- REACH SVHC
- Low-Halogen

Industry Documents

- IPC 1752A Class C
- IPC 1752A Class D
- Molex Product Compliance Declaration
- IEC-62474
- chemSHERPA (xml)

Substances of Interest

- PFAS

EU RoHS Certificate of Compliance

Part Details

General

| | |
|----------------|---|
| Status | Obsolete |
| Category | Terminal Blocks and Barrier Strip |
| Series | 38660 |
| Description | 12.70mm Pitch Beau PCB Tri-Barrier Terminal Strip, without Mounting Ends, 600V, 10 Circuits |
| Application | Wire-to-Board |
| Component Type | One Piece |
| Product Name | Fixed Mount Barrier |
| Type | Barrier Strips |
| UPC | 883906403126 |

Electrical

| | |
|-------------------------------|-------|
| Current - Maximum per Contact | 45.0A |
| Voltage - Maximum | 600V |

Physical

| | |
|--------------------------------|-------------|
| Circuits (Loaded) | 10 |
| Circuits (maximum) | 10 |
| Color - Resin | Black |
| Entry Angle | Horizontal |
| Lock to Mating Part | None |
| Material - Metal | Brass |
| Material - Plating Mating | Tin |
| Material - Plating Termination | Tin |
| Material - Resin | Polysulfone |
| Number of Rows | 1 |
| Orientation | Vertical |
| Panel Mount | No |
| PCB Retention | Yes |
| PC Tail Length | 4.06mm |

| | |
|-------------------------------|-----------------------|
| Pitch - Mating Interface | N/A |
| Pitch - Termination Interface | 12.70mm |
| Polarized to Mating Part | N/A |
| Shrouded | Tri-Barrier |
| Stackable | No |
| Temperature Range - Operating | -40° to +110°C |
| Wire Size (AWG) | 10, 12, 14, 16, 18, 8 |
| Wire Size mm ² | 0.82-8.37 |

This document was generated on Feb 27, 2026

Obsolete