

BPSL001309524R7M00

Search by :

[Part Number](#)
[Characteristics](#)
[Cross reference](#)


MP ?

Unshielded Type

[Series Pdf](#)

[RoHSREACHCoC](#)

Product detail

L (mm) ±	12.95Max.
W(mm) ±	9.4Max.
T (mm) ±	5.21Max.
Inductance(uH)	4.7
Tolerance(±%)	20
Test Frequency	0.1V 100kHz
SRF(MHz)Typ	45
RDC(Ω)Max	0.018
Isat(A)	5.4
Irms(A)	4.8


Part Numbering

Dimensions

Packing

Recommended Pattern

Electrical Characteristics

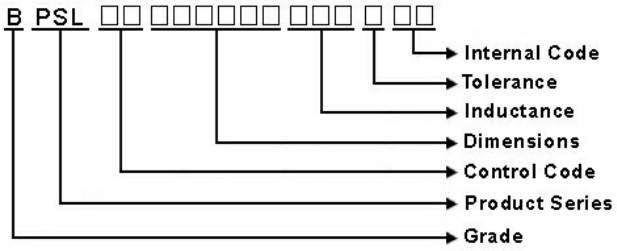

Products

Power Inductor
EMI-Noise Suppression
RF-Signal Inductor
Resistor & Current Sensor

Applications

Automotive
Industrial
Server/DataCenter
Communication
Mobile and Tablet
Computer/Laptop
Consumer

Design Tools

Simulation Tool
Product Search Engine
E-Catalogue

About Us

Corporate Overview
Corporate Milestones
Core Technology
Certificates & Awards
Quality and Social Responsibility

Investor

Financial Information
Corporate governance
Stakeholder Contacts

News

Media Center
New Products

[Events](#)

[Product Notices](#)

Contact Us

[Contact Info](#)

[Contact Form](#)

[Join Chilisin](#)

[Terms of Use](#)

[Privacy policy](#)

[Sitemap](#)



Inductor



Resistor



Powder

Copyrights © 2018. Chilisin. All rights reserved.