



Heat Shrink Tubing > Versafit-V4 Heat Shrink Tubing



Tubing Product Type: **Heat Shrink Tubing**

Primary Product Color: **Black**

Shrink Ratio: **2:1**

Wall Type: **Single Wall**

Recovered Inside Diameter (Max): **3 mm [.118 in]**

[All Versafit-V4 Heat Shrink Tubing \(16\)](#)

## Features

### Electrical Characteristics

Operating Voltage (Max)	.3 kV
-------------------------	-------

### Usage Conditions

Shrink Temperature (Min)	70 °C
Tubing Flammability Type	Highly Flame-Retardant
Operating Temperature Range	-30 – 125 °C
Recovery Temperature	90 °C

### Body Features

Fluid Type	None
Primary Product Color	Black
Shrink Ratio	2:1
Primary Product Material	Irradiated Modified Polyolefin
Flexibility	Very Flexible

### Product Type Features

Tubing Product Type	Heat Shrink Tubing
Wall Type	Single Wall

### Dimensions

Recovered Inside Diameter (Max)	3 mm [.118 in]
---------------------------------	----------------



Expanded Inside Diameter (Min)	6.5 mm[.256 in]
Tubing Size Range	15.24 mm[.6 in]

**Packaging Features**

Packaging Method	Piece
------------------	-------

**Operation/Application**

Mechanical Resistance	Strain Relief, Wrinkling
-----------------------	--------------------------

**Product Availability**

Applicable Region	Global
-------------------	--------

**Other**

Meets Low Outgassing Requirements	No
Product Source	China
EU RoHS Compliance	Compliant
EU ELV Compliance	Compliant

**Product Compliance**

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides

on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

## Compatible Parts




TE Part # EG1114-000  
CV1981-ST-230V1600W-EU

## Also in the Series | RAYCHEM Versafit V4



Dual Wall Tubing(1)

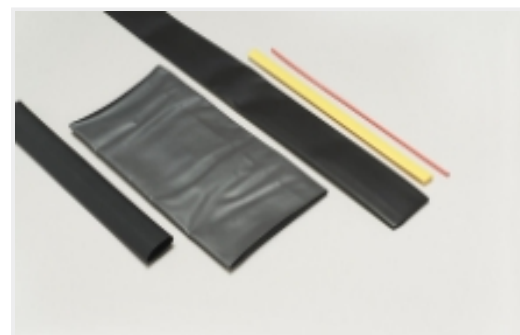


Heat Shrink Tubing(20)




Single Wall Tubing(19)

## Customers Also Bought

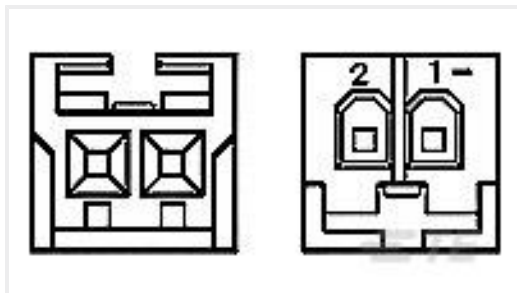

TE Part #172486-2  
2P REC HSG CRIMP EI SER

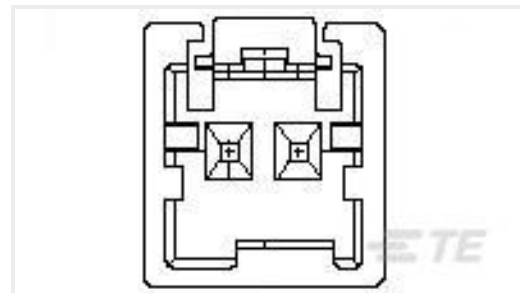

TE Part #1903388-1  
GIC 2.5 W PLUG HSG 2P NATURAL



TE Part #2-1903388-3  
GIC 2.5 W PLUG HSG 2P BLUE



TE Part #626095-1  
FASTIN-ON .250 REC 1.0-2.5 MM2 BR



TE Part #160684-4  
FF 110 REC 0.5-1.0MM2 TPBR




TE Part #53413-1  
PIDG PVF2 22-16COM22-18MIL 1/2



TE Part #CAT-HST-VERSAFITV2  
Versafit-V2 Heat Shrink Tubing



TE Part #2309411-3  
DDR4 SODIMM 260P 8.0H STD

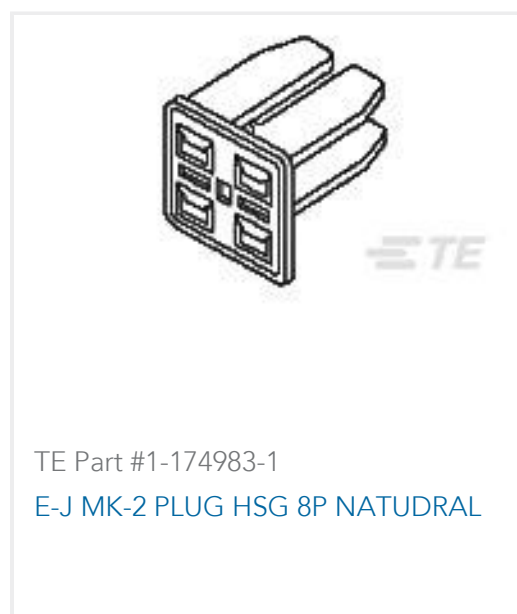

## Documents

### Product Drawings

[V4-6.0-0-SP-SM](#)

English

---

### Datasheets & Catalog Pages

[Measuring\\_Single\\_Wall\\_Tubing](#)

English

[Selecting\\_Correct\\_Tubing\\_1216](#)

English

[Very-Thin-Wall, Highly Flame-Retardant, Metric-Sized Heat-Shrinkable Tubing](#)

English

[Versafit v4 Tubing](#)

English

---

### Product Specifications

[Application Specification](#)

English