




Switches > Slide Switches

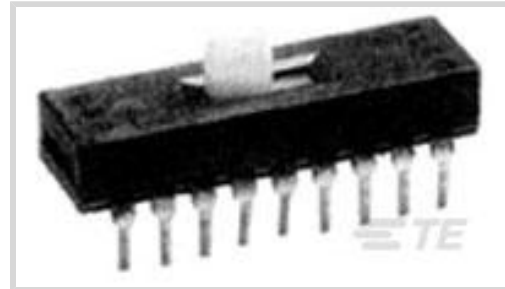

Contact Current Rating: **.3 A**

Configuration (Pole-Throw): **Four Pole - Double Throw**

Product Orientation: **Vertical**

Contact Base Material: **Copper Alloy**

Number of Actuators: **Single**

Features

Operation/Application

Assembly Process Feature	Auto-Insert Packaging
--------------------------	-----------------------

Industry Standards

UL Flammability Rating	UL 94V-0
------------------------	----------

Packaging Features

Packaging Method	Tube
------------------	------

Dimensions

Product Width	7.37 mm[.29 in]
Product Length	17.78 mm[.7 in]
Actuator Length	2.79 mm[.11 in]

Other

Grade	Telecom
EU RoHS Compliance	Not Compliant
EU ELV Compliance	Not Compliant

Termination Features

Termination Post & Tail Length	4.06 mm[.16 in]
Termination Method to PCB	Through Hole - Solder

Body Features

--	--



Actuator Orientation	Top
Product Orientation	Vertical
Actuator Profile	Extended
Actuator Material	Nylon
Actuator Color	White

Electrical Characteristics

Contact Current Rating	.3 A
Operating Voltage	28 VDC

Configuration Features

Configuration (Pole-Throw)	Four Pole - Double Throw
Number of Actuators	Single
Number of Positions	4
Operating Function	On On

Contact Features

Contact Base Material	Copper Alloy
Switch Contact Plating Material	Silver

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Not Compliant
EU ELV Directive 2000/53/EC	Not Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JAN 2022 (223) SVHC > Threshold: Pb (13% in Component Part) Article Safe Usage Statements: Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Wave solder capable to 265°C

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as

EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 1825010-1
ASE2204=DPDT AUTOSLIDE




TE Part # 7-1437581-2
ASF42L=4PDT AUTO-SLIDE W/L BEN



TE Part # 1-1825010-3
ASE4204=4PDT AUTOSLIDE



TE Part # 4-1825010-4
ASE62S04=6PDT AUTOSLIDE

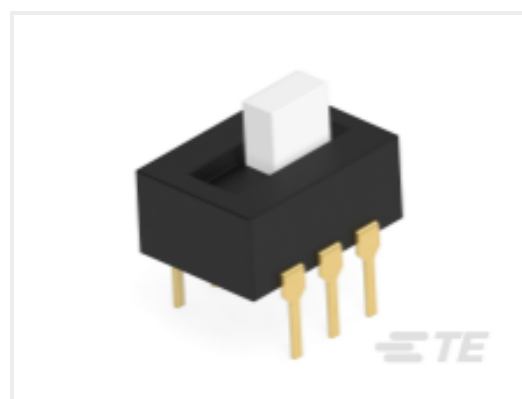


TE Part # 1825010-2
ASE22G04=DPDT AUTOSLIDE




TE Part # 3-1825010-7
ASE6204=6PDT AUTOSLIDE

Also in the Series | [Alcoswitch ASE/F](#)

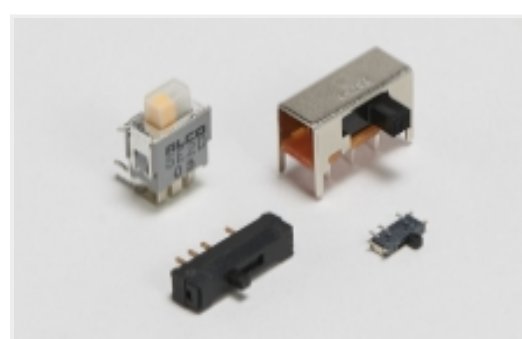

[Slide Switches\(46\)](#)

Customers Also Bought

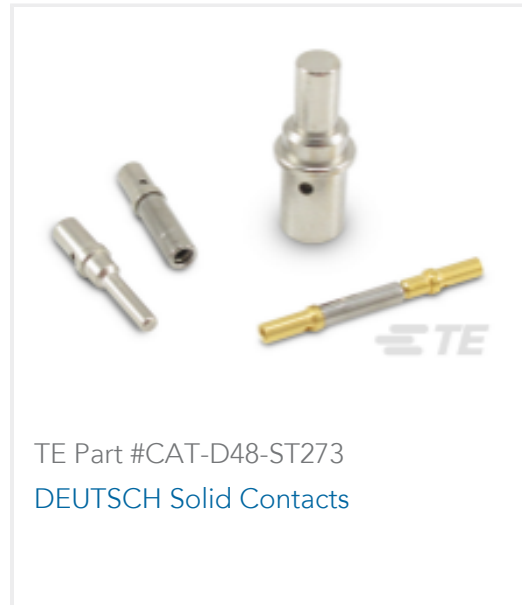

Documents

Product Drawings

[ASE42=4PDT AUTO-SLIDE](#)

English

CAD Files

Customer View Model

[ENG_CVM_CVM_1-1437581-4_L.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_1-1437581-4_L.3d_stp.zip](#)

English

Customer View Model

[ENG_CVM_CVM_1-1437581-4_L.2d_dxf.zip](#)

English

3D PDF

3D

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.