



Neohm | Neohm UPW

TE Internal #: 1-1624323-0

250 ohm, Through-Hole Precision Resistor, Wire Wound, .5 W, .1 %, ±5 ppm/°C, Axial-Leaded, Copper Termination, 12.7 x 6.35 mm, Neohm UPW

[View on TE.com >](#)

Passive Components > Resistors > Through-Hole Resistors



Resistance Value: 250 Ω

Resistor Type: Precision Resistor

Element Type: Wire Wound

Power Rating: .5 W

Resistance Class: Up to 1kΩ

### Features

#### Usage Conditions

Operating Temperature Range	-55 – 145 °C
Temperature Coefficient	±5 ppm/°C

#### Electrical Characteristics

Operating Voltage	400 V
Resistance Value	250 Ω
Power Rating	.5 W
Resistance Class	Up to 1kΩ
Passive Component Tolerance	.1 %

#### Product Type Features

Resistor Type	Precision Resistor
Element Type	Wire Wound

#### Configuration Features

Number of Resistors	1
---------------------	---

#### Body Features

Lead Type	Axial-Leaded
-----------	--------------

#### Termination Features

Termination Area Base Material	Copper
Number of Terminations	2



**Dimensions**

Passive Component Dimensions	12.7 x 6.35 mm
------------------------------	----------------

**Packaging Features**

Packaging Method	Loose Piece - Box
------------------	-------------------

**Other**

EU RoHS Compliance	Compliant
EU ELV Compliance	Compliant

**Product Compliance**

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUL 2021 (219) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Reflow solder capable to 260°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

**Compatible Parts**



Also in the Series | [Neohm UPW](#)



Through-Hole Resistors(31)

## Customers Also Bought




TE Part #3-2176177-2  
CRGH0603 1% 56K 0.2W



TE Part #6-1879225-0  
CPF 0603 182K 0.1% 25PPM 1K RL




TE Part #53115-2  
TERMINAL,PIDG SPD 26-24 6



TE Part #2357976-2  
ASSEMBLY, RF MODULE,  
DAUGHTERCARD




TE Part #5-1879214-4  
CPF 0402 1K24 0.1% 25PPM 1K RL

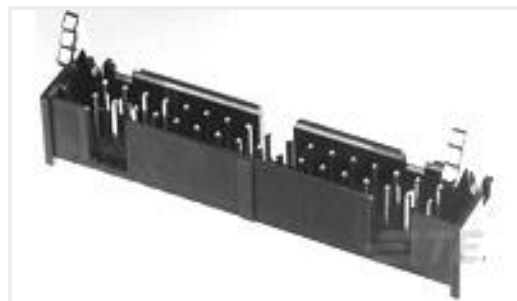

TE Part #1-1761608-5  
IDC LOW PRO HDR 50P VERT SHT L



TE Part #3-2176371-5  
RO 0603 10K5 0.1% 10PPM 5K RL

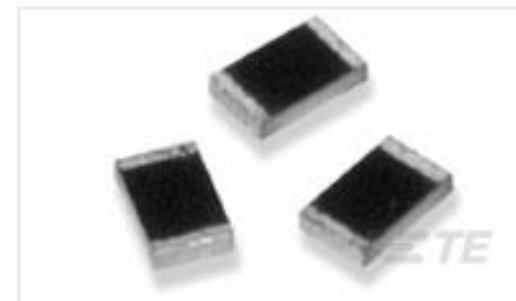

TE Part #1-1879264-9  
RP 2B 73K2 0.1% 15PPM CUT LENGTH



TE Part #2-1879022-7  
SMF3 3K9 5%



TE Part #2-1879455-3  
TE 1500W 68R 5% Bracket

## Documents

[CAD Files](#)

[3D PDF](#)

[3D](#)

[Customer View Model](#)

[ENG\\_CVM\\_CVM\\_1-1624323-0\\_BA.2d\\_dxf.zip](#)

English

[Customer View Model](#)

[ENG\\_CVM\\_CVM\\_1-1624323-0\\_BA.3d\\_igs.zip](#)

UPW50B250RV

250 ohm, Through-Hole Precision Resistor, Wire Wound, .5 W, .1 %,  $\pm 5$  ppm/ $^{\circ}$ C, Axial-Leaded, Copper Termination, 12.7 x 6.35 mm, Neohm UPW



English

**Customer View Model**

[ENG\\_CVM\\_CVM\\_1-1624323-0\\_BA.3d\\_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

**Datasheets & Catalog Pages**

[1309350\\_PASSIVE\\_COMPONENT](#)

English

[Ultra Precision Wire-Wound Resistors - Type UPW Series - Tyco Electronics Passives](#)

English