

3631B471KL ✓ ACTIVE

Sigma | Sigma 3631

TE Internal #: 1-1625812-3

470 μ H Power Inductor, 500 mA, .97 ohm DC Resistance, 18 Quality

Factor, 10 %, Shielded, 12.7 mm [.5 in] Length, 12.7 mm [.5 in]

Width, Sigma 3631

[View on TE.com >](#)



Passive Components > Inductors > Power Inductors



Inductance: 470 μ H

Current Rating (Max): 500 mA

DC Resistance: .97 Ω

Inductor Quality Factor: 18

Passive Component Tolerance: 10 %

Features

Product Type Features

Element Type	Wire Wound
--------------	------------

Packaging Features

Packaging Method	Taped & Reeled
------------------	----------------

Usage Conditions

Operating Temperature Range	-25 – 105 °C
-----------------------------	--------------

Electrical Characteristics

Inductance	470 μ H
Current Rating (Max)	500 mA
DC Resistance	.97 Ω
Passive Component Tolerance	10 %

Dimensions

Product Length	12.7 mm [.5 in]
Product Width	12.7 mm [.5 in]
Product Height	6 mm [.236 in]

Operation/Application

Shielded	Yes
----------	-----

Other

--	--



Inductor Quality Factor	18
EU RoHS Compliance	Compliant
EU ELV Compliance	Compliant

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Reflow solder capable to 260°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

TE Part # 4-1625812-2
3631B 47UH 15%


TE Part # 4-1625812-1
3631B 470UH 10%

TE Part # 1625812-4
3631B 22UH 20% FIO


TE Part # 1-1625812-0
3631B 330UH 10% FIO



Also in the Series | **Sigma 3631**

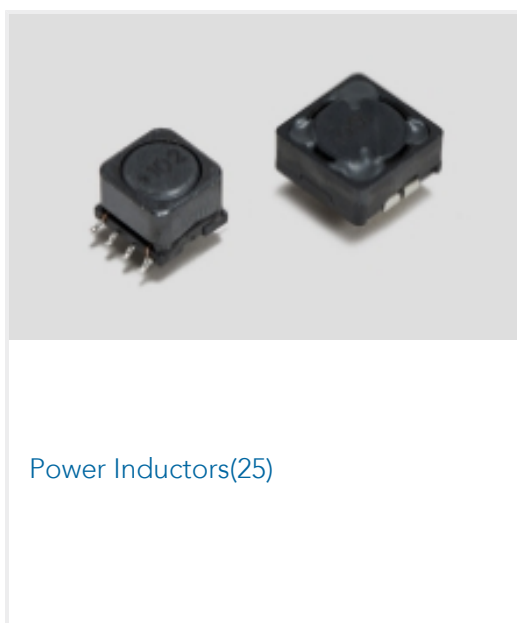

Customers Also Bought

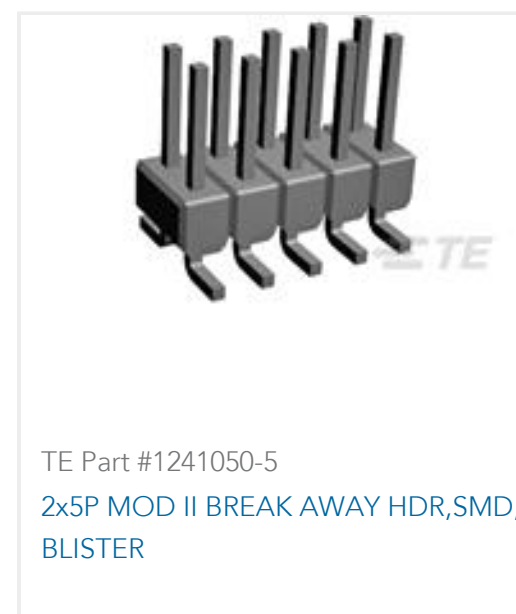

Documents

Product Drawings

[3631B 470UH 10% FIO](#)

English

CAD Files

Customer View Model

[ENG_CVM_CVM_1-1625812-3_BC.2d_dxf.zip](#)

English

3D PDF

3D

Customer View Model

[ENG_CVM_CVM_1-1625812-3_BC.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_1-1625812-3_BC.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

3631B471KL

470 μ H Power Inductor, 500 mA, .97 ohm DC Resistance, 18 Quality Factor, 10 %, Shielded, 12.7 mm [.5 in] Length, 12.7 mm [.5 in] Width, Sigma 3631



1309350_PASSIVE_COMPONENT

English

Shielded SMD Power Inductor - Type 3631 Series - Tyco Electronics Passives

English