

1-2370703-1 ✓ ACTIVE


TE Internal #: 1-2370703-1

3 Position Housing, Housing for Female Terminals, Wire-to-Wire, 8.66 mm [.34 in] Centerline, Sealable, Gray, Wire & Cable, Power

[View on TE.com >](#)



Connectors > Automotive Connectors > Automotive Housings > DEUTSCH DT Connectors with snap cap

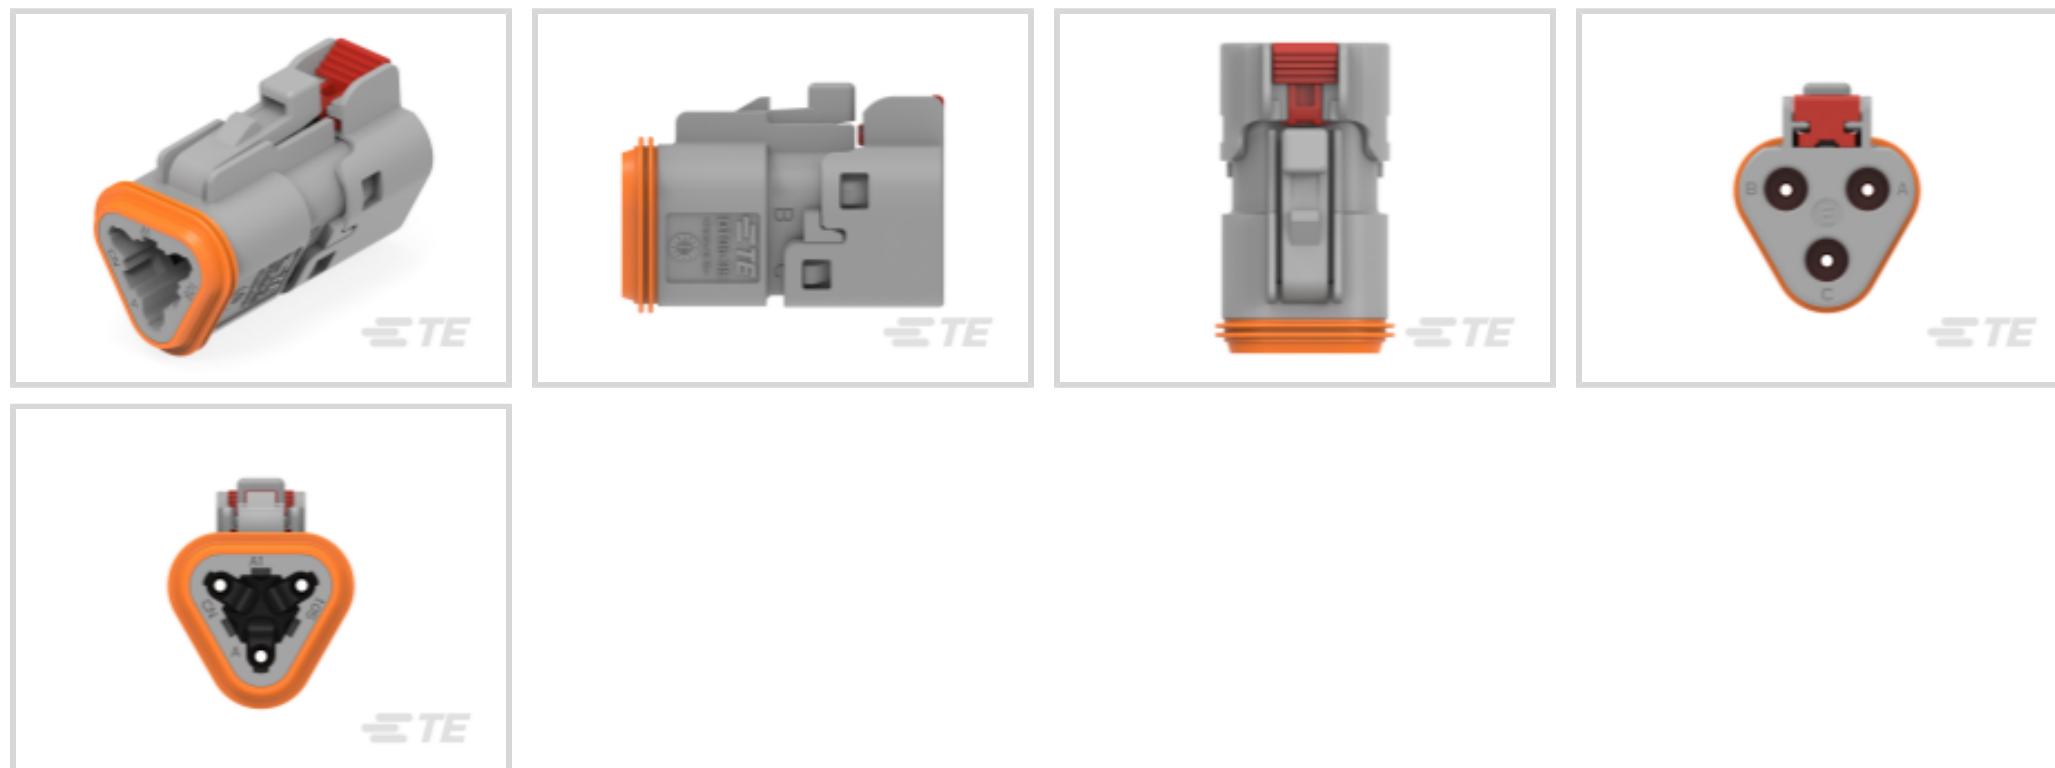

Number of Positions: 3

Connector & Housing Type: **Housing for Female Terminals**

Mating Pin Diameter: 1.59 mm [.063 in]

Connector System: **Wire-to-Wire**

Centerline (Pitch): 8.66 mm [.34 in]

[All DEUTSCH DT Connectors with snap cap \(24\)](#)

Features

Industry Standards

IP Rating	IP6K9K, IP68
Compatible With Agency/Standards Products	SAE J2030
UL Flammability Rating	UL 94V-0

Dimensions

Row-to-Row Spacing	7.5 mm[.295 in]
Compatible Insulation Diameter Range	1.35 – 3.05 mm[.053 – .12 in]
Product Width	23.8 mm[.937 in]
Product Length	18.7 mm[.736 in]
Connector Height	34.2 mm[1.35 in]

Packaging Features

Packaging Quantity	1000
Packaging Method	Package

Mechanical Attachment



Strain Relief	Without
Terminal Position Assurance	No
Mating Alignment Type	Polarized
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)

Other

Serviceable	Yes
Connector Position Assurance Capable	No
EU RoHS Compliance	Compliant
EU ELV Compliance	Compliant

Electrical Characteristics

Operating Voltage	250 VDC
Nominal Voltage Architecture	250 V

Body Features

Cable Exit Angle	180°
Primary Product Color	Gray

Housing Features

Housing Material	PA 66 GF15
Centerline (Pitch)	8.66 mm [.34 in]

Contact Features

Contact Size	Size 16
Contact Type	Socket
Mating Pin Diameter	1.59 mm [.063 in]
Contact Current Rating (Max)	13 A

Product Type Features

Mixed & Hybrid Connector	No
Connector Shape	Triangular
Connector & Housing Type	Housing for Female Terminals
Connector System	Wire-to-Wire
Sealable	Yes
Primary Locking Feature	Integrated in Housing
Connector & Contact Terminates To	Wire & Cable



Configuration Features

Blank Cavity Position	0
Connector Seal Code	E Seal
Number of Positions	3
Number of Rows	2

Usage Conditions

Operating Temperature (Max)	125 °C[257 °F]
Operating Temperature Range	-55 – 125 °C[-67 – 257 °F]

Operation/Application

Circuit Application	Power
---------------------	-------

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JAN 2024 (240) SVHC > Threshold: Octamethylcyclotetrasiloxane (D4) (.5% in Component Part) Dodecamethylcyclohexasiloxane (D6) (.5% in Component Part) Decamethylcyclopentasiloxane (D5) (.5% in Component Part) Article Safe Usage Statements: Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits

as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # W3S-P012
WEDGE LOCK, 3P, PLG, GRN, SL RET, DT



TE Part # 0413-217-1605
SEALING PLUG, SIZE 16, LOCKING, WHT

Customers Also Bought



TE Part #2-330648-1
PIDG 22-16 22-18 MIL R 4; TAPE



TE Part #YHV280-2PM-P-4MM-B
HVA280-2phm,pass,4sqmm,Key B



TE Part #1-1633961-2
CRIMPER, INSULATION F PREMIUM



TE Part #4-1633932-0
ANVIL, COMBINATION



TE Part #464291-5
ANVIL, SAND-BLASTED 12-10



TE Part #788189-2
CPC 17-3 RCPT ASY,REV SEX



TE Part #2177090-3
STEEL, OUTER FERRULE, 8MM HV, 25SQMM



TE Part #1587940-3
CABLE SEAL RETAINER, SIZE C



TE Part #2208669-3
8MM HV, CONTACT, ASSY



TE Part #2103013-3
CABLE SEAL RETAINER, SIZE 2, OR, HVA280

Documents

Product Drawings

3POS, DIA 1.5MM, SOC HSG ASSY, SLD, COD NEUT

English



CAD Files

3D PDF

3D

Customer View Model

[ENG_CVM_CVM_1-2370703-1_A.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_1-2370703-1_A.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_1-2370703-1_A.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

DEUTSCH DTM SEALED FLANGE RECEPTACLE

English

Product Specifications

Application Specification

English