

175024-1 ✓ ACTIVE

Positive Lock | Positive Lock 250


TE Internal #: 175024-1

Quick Disconnect Receptacle, Uninsulated, 15 – 10 AWG, 1.65 – 5.26 mm<sup>2</sup> Wire, 6.35 mm [.25 in] Tab Width, F-Crimp, Straight, Brass, Positive Lock 250

[View on TE.com >](#)



Terminals & Splices > Quick Disconnects

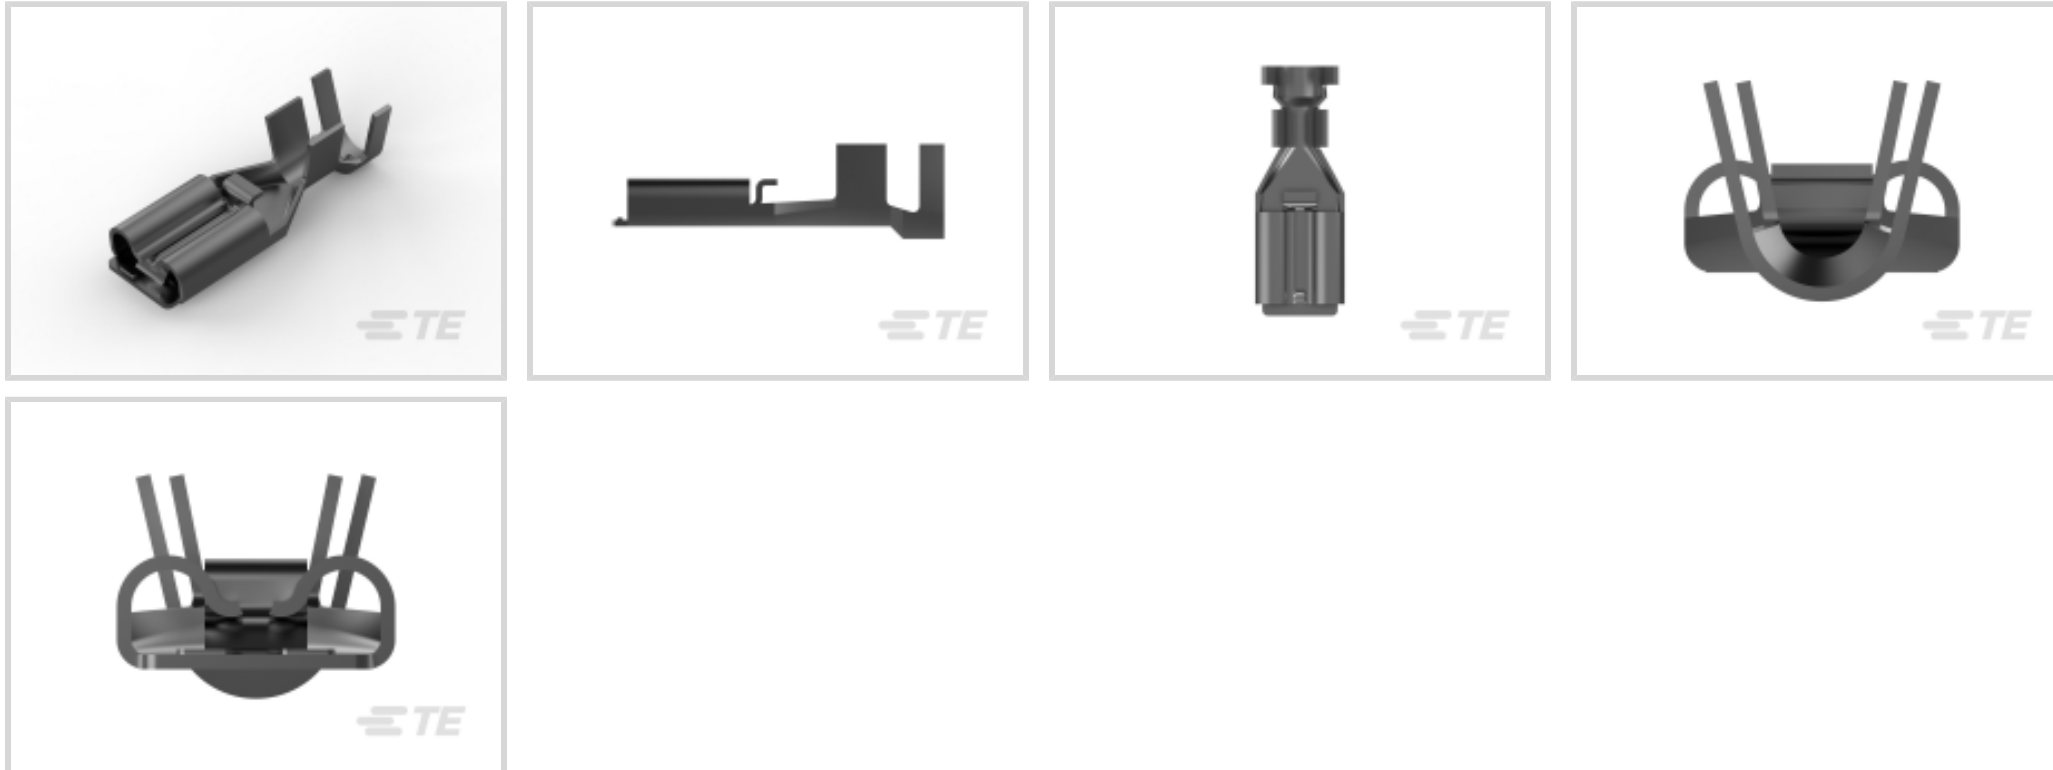

Quick Disconnect Terminal Type: **Receptacle**

Wire Size: 1.65 – 5.26 mm<sup>2</sup>

Mating Tab Width: 6.35 mm [.25 in]

Mating Tab Thickness: .81 mm [.032 in]

## Features

### Configuration Features

Compatible With Wire & Cable Type	Discrete Wire
Connection Capacity	Single

### Electrical Characteristics

Voltage Rating	250 V
----------------	-------

### Contact Features

Quick Disconnect Terminal Type	Receptacle
Mating Tab Width	6.35 mm [.25 in]
Mating Tab Thickness	.81 mm [.032 in]
Terminal Orientation	Straight
Contact Base Material	Brass
Terminal Plating Material	Pre-Tin
Crimp Type	F-Crimp
Barrel Type	Open

### Termination Features

--	--



Product Terminates To	Wire & Cable
-----------------------	--------------

### Mechanical Attachment

Wire Insulation Support	With
-------------------------	------

### Dimensions

Product Length	21.2 mm [.834 in]
Compatible Insulation Diameter Range	3 – 5.1 mm [.118 – .2 in]
Terminal Material Thickness	.41 mm [.016 in]
Wire Size	1.65 – 5.26 mm <sup>2</sup>

### Usage Conditions

Insulation Option	Uninsulated
Operating Temperature Range	-40 – 110 °C [-40 – 230 °F]

### Packaging Features

Packaging Quantity	4000
Packaging Method	Strip/Reel

### Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	有害物质含量符合标准要求 No Restricted Substance(s) Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2025 (250) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

#### Product Compliance Disclaimer




This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous

materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

## Compatible Parts



## Also in the Series | Positive Lock 250

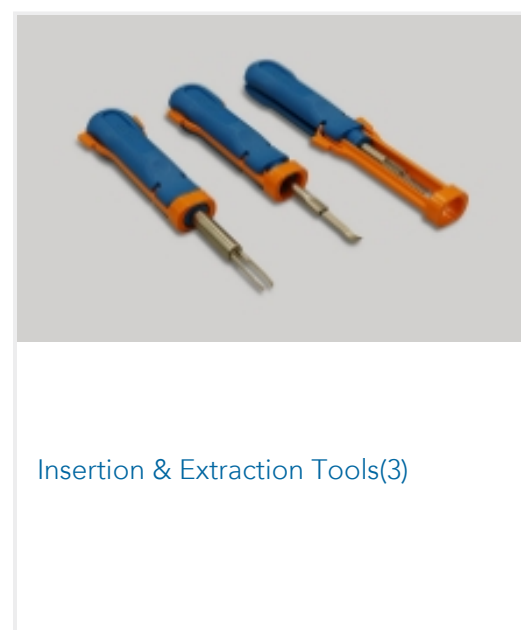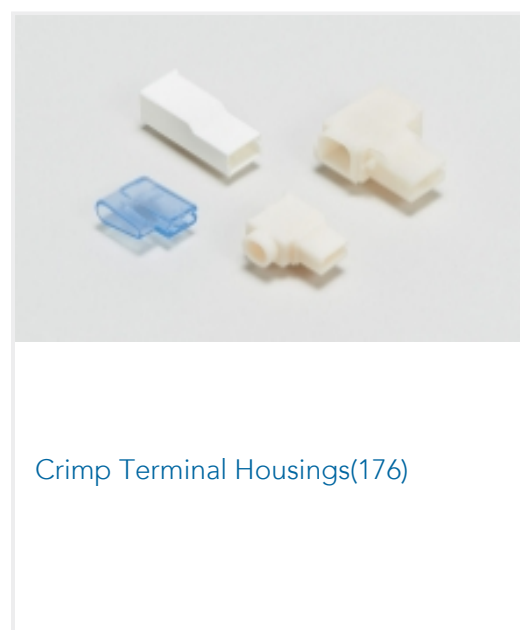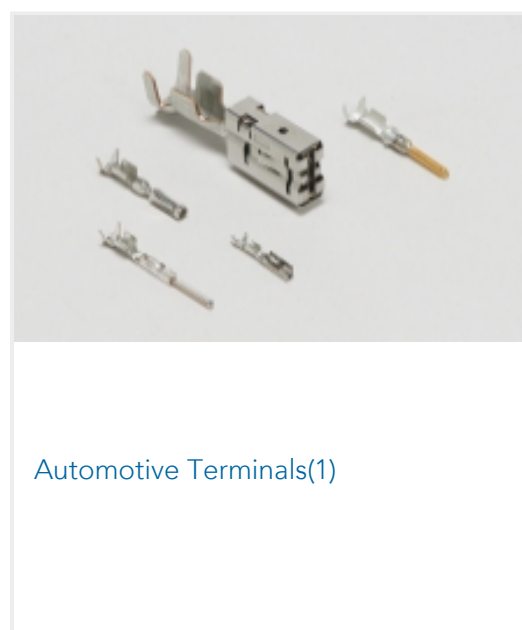




Quick Disconnects(171)

## Customers Also Bought



TE Part #61969-1  
187 FASTON REC 20-16 AWG TPBR

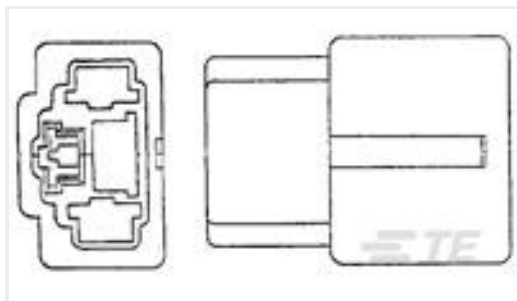

TE Part #176773-5  
FF 250 CAP HSG 3P NYLON NAT



TE Part #2-1623728-9  
BCHE SBCHE 11 6R8 5%



TE Part #1871867-1  
GRACE INERTIA 6.2mm PITCH PLUG 3POS



TE Part #4-2176231-3  
3522 560R 1% 3W



TE Part #2232111-1  
250 FASTON, FLAG, REC., 12-20 AWG, TPBR



TE Part #2297440-3  
MMF, FREE HANGING, PLUG HOUSING



TE Part #1-2351101-5  
5P MONOPLUG 2.5



TE Part #2391865-2  
250 sleeve PL YELLOW transparent



TE Part #8-1241961-7  
STD TIMER PLUG HSG 3P MK2

## Documents

### Product Drawings

[250 PL EX REC. 15-10AWG PTBR](#)

Japanese

### CAD Files

Customer View Model

[ENG\\_CVM\\_CVM\\_175024-1\\_G2.3d\\_igs.zip](#)

English

Customer View Model



[ENG\\_CVM\\_CVM\\_175024-1\\_G2.3d\\_stp.zip](#)

English

**Customer View Model**

[ENG\\_CVM\\_CVM\\_175024-1\\_G2.2d\\_dxf.zip](#)

English

**3D PDF**

3D

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

---

### Product Specifications

[Application Specification](#)

English

---

### Instruction Sheets

[Instruction Sheet \(non U.S.\)](#)

English

**POSITIVE LOCK EX CONTACT**

English

---

### Agency Approvals

[Agency Approval Document](#)

English