

1766336-1 ✓ ACTIVE

MINI CROWN EDGE | CROWN EDGE


TE Internal #: 1766336-1

Board-to-Board Card Edge Power Connector, 30 Position, 2.5 mm [.098 in] Centerline, Power & Signal, 12 Power Positions, CROWN EDGE

[View on TE.com >](#)



Connectors > PCB Connectors > Card Edge Connectors > Card Edge Power Connectors

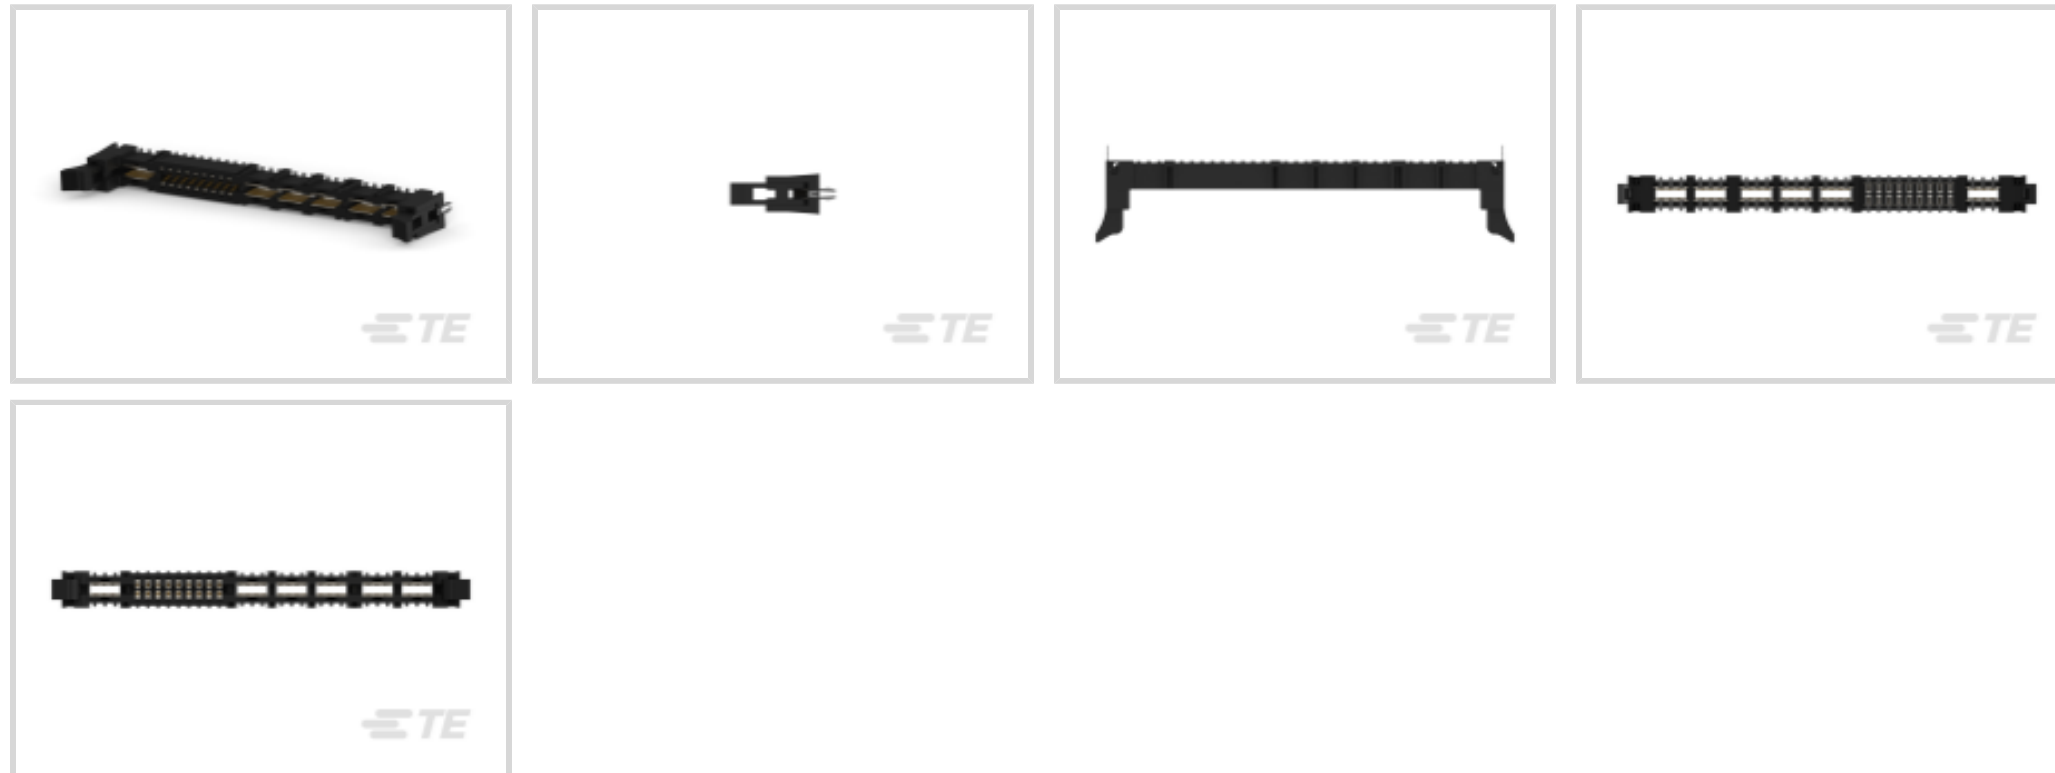

Connector System: **Board-to-Board**

Number of Positions: **30**

Centerline (Pitch): **2.5 mm [.098 in]**

Contact Current Rating (Max): **25 A**

Circuit Application: **Power & Signal**

Features

Industry Standards

Compatible With Agency/Standards Products	UL, CSA
UL Flammability Rating	UL 94V-0
Compatible With Approved Standards Products	CSA 1935071, UL 1977

Body Features

Primary Product Color	Black
-----------------------	-------

Mechanical Attachment

Connector Mounting Type	Board Mount
Mating Retention Type	Latch
PCB Mount Retention	With
Mating Retention	With
PCB Mount Retention Type	Boardlock
Mating Alignment	With
PCB Mount Alignment	Without

Packaging Features



Packaging Quantity	26
Packaging Method	Package, Box & Tray

Dimensions

Card Slot Depth	6 mm[.236 in]
Row-to-Row Spacing	6.2 mm[.244 in]
Accepts Card Thickness	1.57 mm[.062 in]
Accepts Card Width	93.34 mm[3.67 in]
Connector Height	20 mm[.787 in]
Power Contact Centerline	9.7 mm[.381 in]

Contact Features

PCB Contact Termination Area Plating Material Finish	Matte
Contact Mating Area Plating Material Thickness	.76 μm [29.92 μin]
PCB Contact Termination Area Plating Material Thickness	3.05 μm [120 μin]
Contact Layout	Inline
Contact Base Material	Copper Alloy
PCB Contact Termination Area Plating Material	Tin
Contact Type	Socket
Contact Current Rating (Max)	25 A
Contact Mating Area Plating Material	Gold

Housing Features

Housing Material	Glass-Filled Polyester
Centerline (Pitch)	2.5 mm[.098 in]

Configuration Features

PCB Mount Orientation	Vertical
Number of Positions	30
Number of Power Positions	12
Number of Signal Positions	18
Number of Dual Positions	6

Product Type Features

Connector & Contact Terminates To	Printed Circuit Board
Connector Mates With	Printed Circuit Board
Connector & Housing Type	Receptacle



Connector System Board-to-Board

Electrical Characteristics

Operating Voltage 250 V

Termination Features

Termination Method to PCB Surface Mount

Usage Conditions

Operating Temperature Range -55 – 105 °C[-67 – 221 °F]

Operation/Application

Circuit Application Power & Signal

Other

EU RoHS Compliance Compliant

EU ELV Compliance Compliant

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU Compliant

EU ELV Directive 2000/53/EC Compliant

China RoHS 2 Directive MIIT Order No 32, 2016 No Restricted Materials Above Threshold

EU REACH Regulation (EC) No. 1907/2006
 Current ECHA Candidate List: JUNE 2024 (241)
 Candidate List Declared Against: JAN 2021 (211)
 Does not contain REACH SVHC

Halogen Content Not Low Halogen - contains Br or Cl > 900 ppm.

Solder Process Capability Reflow solder capable to 260°C

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>



Compatible Parts



Also in the Series | CROWN EDGE

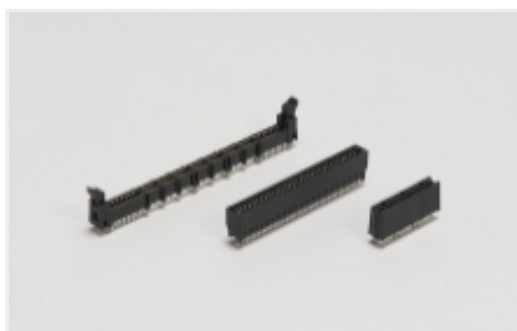


Card Edge Power Connectors(30)



Connector Contacts(1)



Power Contacts(1)

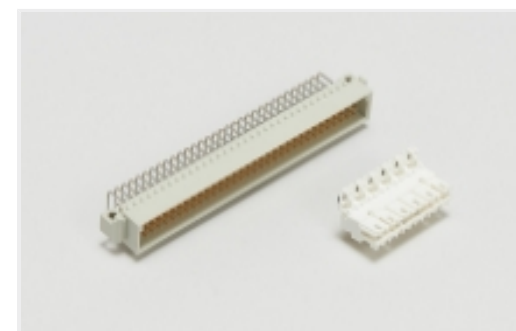

Standard Edge Connectors(2)

Customers Also Bought




TE Part #1-1734248-0
1.0 FPC, ZIF V/T, SMT, 10P



TE Part #GA10K3MCD1
MCD PROBE, 10K OHMS,



TE Part #T4130012031-000
M12,REAR MOUNT,MALE,A,3P,
SOLDER WIRE

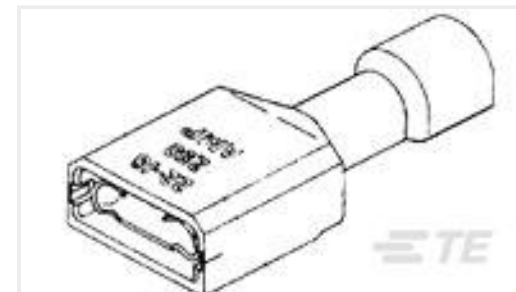

TE Part #2-520184-2
ULTRAFast 250 ASSY REC 22-18
TPBR LP



TE Part #1-1734742-0
.5 FPC VT ZIF Type-A 10 CONT



TE Part #T4110002031-000
M12,FEMALE,STRAIGHT,A CODE,3P,
PG9,GOLD



TE Part #3-641437-3
03P MTA156 PSTD CONN ASSY RED



TE Part #6651712-1
284-0162-03003=TA CONN,SKT

Documents

Product Drawings

283-0172-03003=TA CONN,SKT,SMT

English



CAD Files

3D PDF

3D

Customer View Model

[ENG_CVM_CVM_1766336-1_B.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_1766336-1_B.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_1766336-1_B.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[POWER_CONNECTORS_CATALOG_SEC04_VRM](#)

English

Product Specifications

[Application Specification](#)

English