



Switches > Push Button Switches



Configuration (Pole-Throw): **Double Pole - Double Throw**

Number of Actuators: **Single**

Actuator Profile: **Extended**

Bushing Style: **Threaded**

Bushing Thread Size: **1/4-40**

Features

Mechanical Attachment

Attachment Method	Screw-On
-------------------	----------

Packaging Features

Packaging Method	Bulk
------------------	------

Dimensions

Button Width	2.8 mm[.11 in]
Cap Diameter	10.01 mm[.394 in]
Bushing Length	8 mm[.315 in]
Actuator Length	8 mm[.315 in]

Contact Features

Contact Base Material	Brass
Switch Contact Plating Material	Gold

Housing Features

Low Profile	No
Process Sealed	No

Product Type Features

Switch Connection Type	Printed Circuit
Illuminated	Without
Actuator Style	Cap Actuator - Order Separately

Body Features



Case Material	Epoxy Resin
Sealing Method	Epoxy
Actuator Material	Nickel-Plated Copper Alloy
Product Orientation	Vertical
Actuator Force	500 g[17.63 oz]
Actuator Profile	Extended
Bushing Style	Threaded
Bushing Thread Size	1/4-40
Actuator Color	Natural

Configuration Features

Panel Cutout Size	6.5 (Diameter) mm[.256 in]
Configuration (Pole-Throw)	Double Pole - Double Throw
Number of Actuators	Single
Snap Action	With
Switch Feedback Type	Non-Tactile
Operating Function	On On

Electrical Characteristics

Contact Current Rating	.06 A
Operating Voltage Range	30 VDC

Product Compliance


[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Not Yet Reviewed
EU ELV Directive 2000/53/EC	Not Yet Reviewed
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUN 2016 (169) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Wave solder capable to 265°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Also in the Series | **Alcoswitch Blue Series**

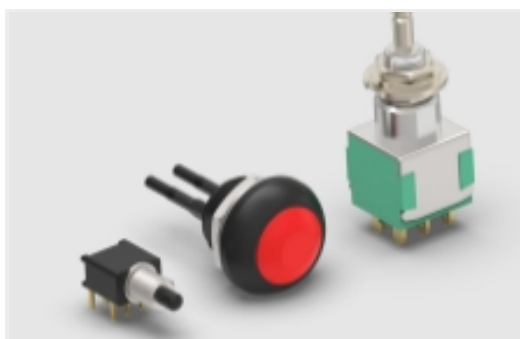

General Purpose Push Button Switches (7)



Push Button Switches(7)

Customers Also Bought



TE Part #2-2364686-8
AVH22 FLT SS LK RNG R&B 24V16A



TE Part #6-2213818-1
6X6 ILL TACT THT 520GF HI SOFT ORANGE



TE Part #1623723-2
SBCH 15 1K5 5%



TE Part #1-282858-2
12P. TERMI-BLOK PCB MOUNT 90



TE Part #2127933-1
C/A, SFP+, GENERIC, 0.5M



TE Part #3-2176414-4
7W STD M/OX 5% 470R



TE Part #T1349160120-000
H16A-TGH-M20



TE Part #2821224-7
SFP28 DIRECT ATTACH CA, 4M, 26AWG



Documents

Product Drawings

MPS2004NPC PSHBTN 0.4VA DPDT

English

Datasheets & Catalog Pages

8-177346-1_ALCOSWITCH_BLUE_PUSHBUTTON

English