




Switches > Slide Switches

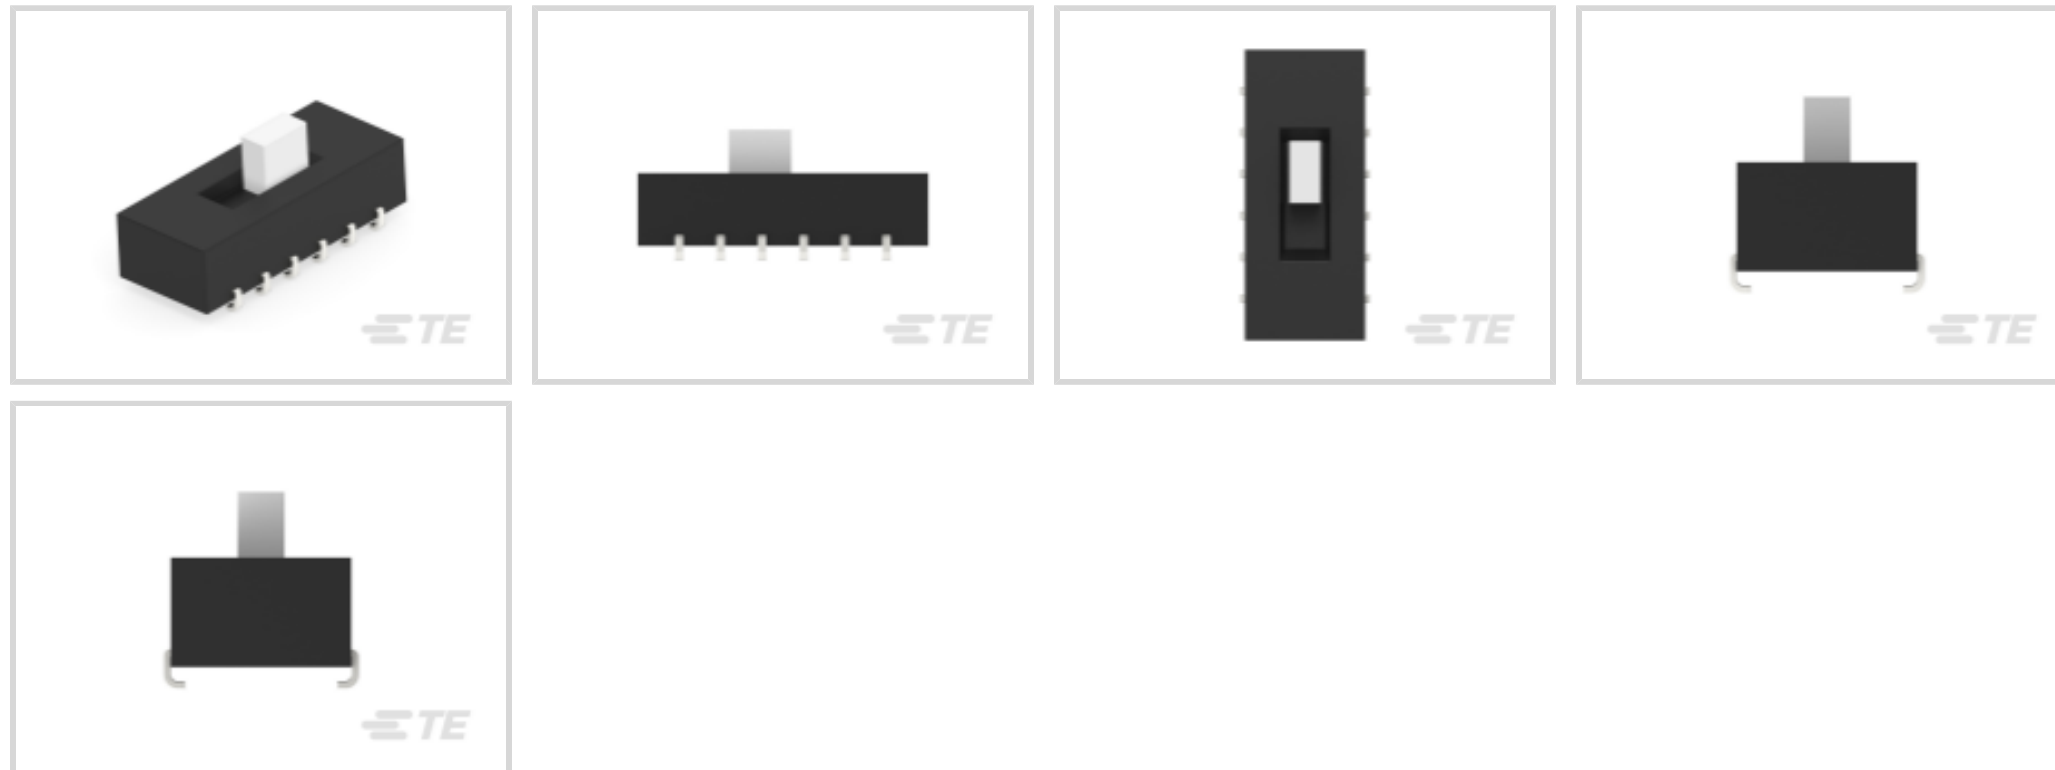

Contact Current Rating: .3 A

Configuration (Pole-Throw): Four Pole - Double Throw

Contact Base Material: Copper Alloy

Number of Actuators: Single

Number of Positions: 2

Features

Product Type Features

| | |
|-----------|---------|
| Leg Style | J Style |
|-----------|---------|

Operation/Application

| | |
|--------------------------|-----------------------|
| Assembly Process Feature | Auto-Insert Packaging |
|--------------------------|-----------------------|

Industry Standards

| | |
|------------------------|----------|
| UL Flammability Rating | UL 94V-0 |
|------------------------|----------|

Packaging Features

| | |
|------------------|------|
| Packaging Method | Tube |
|------------------|------|

Dimensions

| | |
|-----------------|-----------------|
| Product Width | 7.37 mm[.29 in] |
| Product Length | 17.78 mm[.7 in] |
| Actuator Length | 2.79 mm[.11 in] |

Other

| | |
|-------------------|-----------|
| Grade | Telecom |
| EU ELV Compliance | Compliant |

Body Features

| | |
|----------------------|-----------------|
| Actuator Orientation | Top |
| Actuator Travel | 2.79 mm[.11 in] |
| Actuator Profile | Extended |
| Actuator Material | Nylon |
| Actuator Color | Natural |

Electrical Characteristics

| | |
|------------------------|--------|
| Contact Current Rating | .3 A |
| Operating Voltage | 28 VDC |

Configuration Features

| | |
|----------------------------|--------------------------|
| Configuration (Pole-Throw) | Four Pole - Double Throw |
| Number of Actuators | Single |
| Number of Positions | 2 |
| Operating Function | On On |

Contact Features

| | |
|---------------------------------|--------------|
| Contact Base Material | Copper Alloy |
| Switch Contact Plating Material | Silver |

Termination Features

| | |
|---------------------------|---------------|
| Termination Method to PCB | Surface Mount |
|---------------------------|---------------|

Product Compliance


[For compliance documentation, visit the product page on TE.com>](#)

| | |
|---|--|
| EU RoHS Directive 2011/65/EU | Not Yet Reviewed |
| EU ELV Directive 2000/53/EC | Compliant |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold |
| EU REACH Regulation (EC) No. 1907/2006 | Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUL 2019 (201) Does not contain REACH SVHC |
| Halogen Content | Not Yet Reviewed for halogen content |
| Solder Process Capability | Reflow solder capable to 260°C |

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Also in the Series | **Alcoswitch ASE/F**

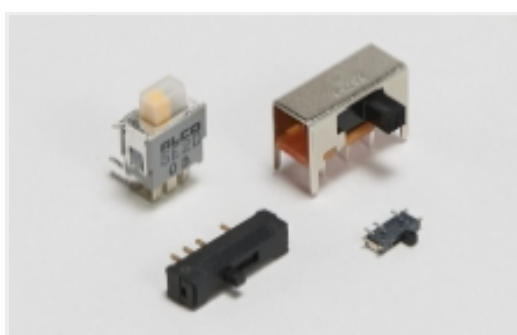

Slide Switches(46)

Customers Also Bought



TE Part #206070-8
CABLE CLAMP KIT #17



TE Part #DT04-2P
REC, 2P, GRY, N



TE Part #DT06-2S
PLG, 2P, GRY, N




TE Part #CAT-D487-W416
WedgeLocks: DEUTSCH DT



TE Part #CAT-D48-ST273
DEUTSCH Solid Contacts



TE Part #CAT-AM71-CH8172
AMP SUPERSEAL 1.5MM,
CONNECTOR HOUSING

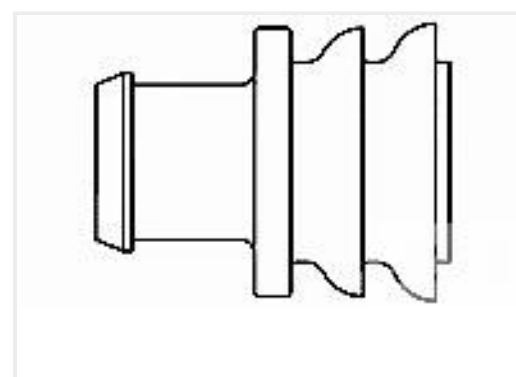

TE Part #281934-2
SINGLE WIRE SEAL

Documents

Product Drawings

[ASE42S04=4PDT AUTOSLIDE](#)

English

CAD Files



Customer View Model

[ENG_CVM_CVM_2-1825010-0_C1.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_2-1825010-0_C1.3d_stp.zip](#)

English

Customer View Model

[ENG_CVM_CVM_2-1825010-0_C1.2d_dxf.zip](#)

English

[3D PDF](#)

[3D](#)

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

[Datasheets & Catalog Pages](#)

[SWITCHES_CORE_PROGRAM_CATALOG](#)

English