



**Power Double Lock**

TE Internal #: 2005247-4


Housing, Plug, Wire-to-Wire, 2 Position, 3.96 mm [.156 in]

Centerline, Wire & Cable, UL 94V-0, Power Double Lock,

Rectangular Power Connectors

[View on TE.com >](#)

Connectors > Power Connectors > Rectangular Power > Rectangular Power Connectors > Glow Wire Power Double Lock Plug

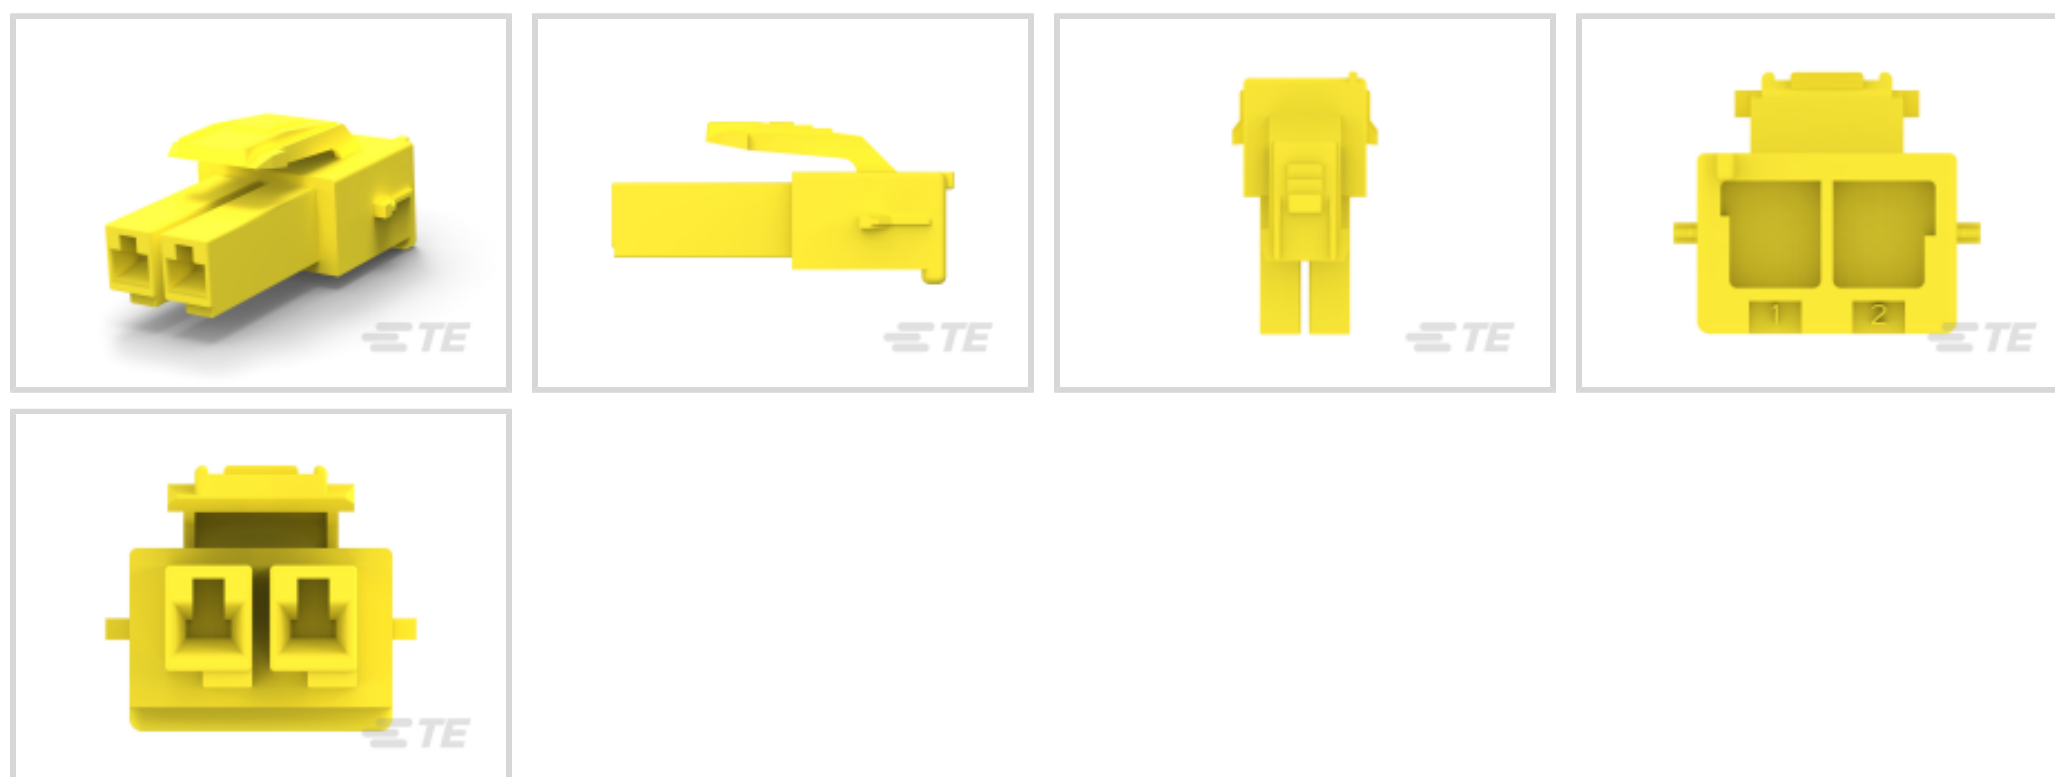

Rectangular Power Connector Type: **Housing**

Connector & Housing Type: **Plug**

Connector System: **Wire-to-Wire**

Number of Positions: **2**

Centerline (Pitch): **3.96 mm [.156 in]**

[All Glow Wire Power Double Lock Plug \(55\)](#)

**Features**

**Identification Marking**

Circuit Identification Feature	Without
--------------------------------	---------

**Dimensions**

Connector Height	20.6 mm [.811 in]
------------------	-------------------

**Packaging Features**

Packaging Quantity	500
Packaging Method	Bag

**Contact Features**

Multiple Contact Types	Without
Contact Retention Within Housing	Without
Contact Type	Receptacle

**Product Type Features**

Rectangular Power Connector Type	Housing
----------------------------------	---------



Connector & Housing Type	Plug
--------------------------	------

Connector System	Wire-to-Wire
------------------	--------------

Sealable	No
----------	----

Connector & Contact Terminates To	Wire & Cable
-----------------------------------	--------------

### Configuration Features

Number of Positions	2
---------------------	---

Number of Power Positions	0
---------------------------	---

Number of Signal Positions	0
----------------------------	---

Number of Rows	1
----------------	---

### Electrical Characteristics

Operating Voltage	50 VAC, 300 VAC
-------------------	-----------------

### Termination Features

Termination Method to Wire & Cable	Crimp
------------------------------------	-------

### Mechanical Attachment

Connector Mounting Type	Cable Mount (Free-Hanging)
-------------------------	----------------------------

### Housing Features

Centerline (Pitch)	3.96 mm [.156 in]
--------------------	-------------------

Housing Color	Yellow
---------------	--------

Housing Material	PA 66
------------------	-------

### Usage Conditions

Operating Temperature Range	-30 – 65 °C [-22 – 149 °F]
-----------------------------	----------------------------

### Operation/Application

Circuit Application	Power & Signal
---------------------	----------------

### Industry Standards

UL Flammability Rating	UL 94V-0
------------------------	----------

Glow Wire Rating	GWT 750°C (Without Flame)
------------------	---------------------------

### Other

EU RoHS Compliance	Compliant
--------------------	-----------

EU ELV Compliance	Compliant
-------------------	-----------

### Product Compliance

For compliance documentation, visit the product page on [TE.com](https://www.te.com)>



EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

### Compatible Parts




### Also in the Series | Power Double Lock




Connector Contacts(24)



Connector Hardware(14)

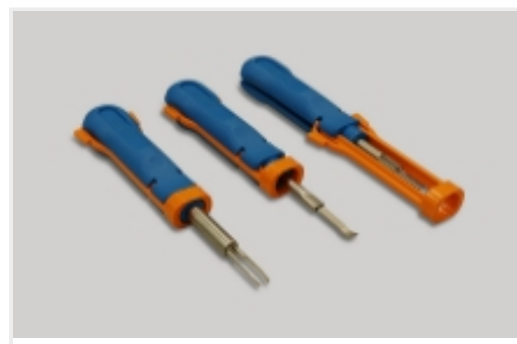

Insertion & Extraction Tools(2)

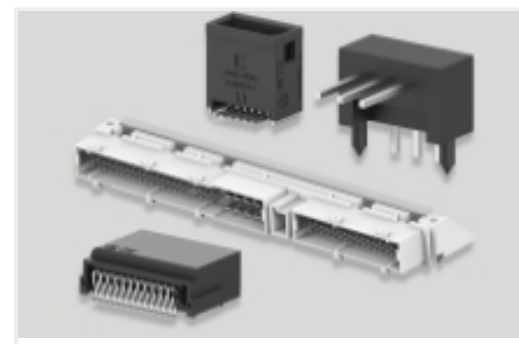


PCB Headers & Receptacles(43)



Power Contacts(24)



Rectangular Power Connectors(240)

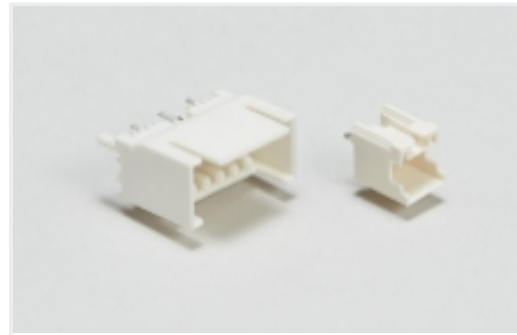


Wire-to-Board Headers & Receptacles (43)

## Customers Also Bought




TE Part #177906-1  
POWER DBL LOCK CAP HSG P/M 2P

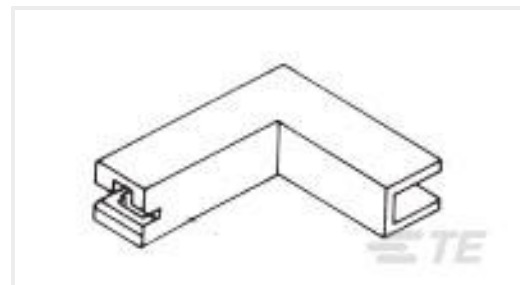

TE Part #360040-1  
110 FASTON HSG.,FLAG,REC.,1 POS, NATRUAL



TE Part #177917-1  
AMP POWER DBL LOCK TAB (L)

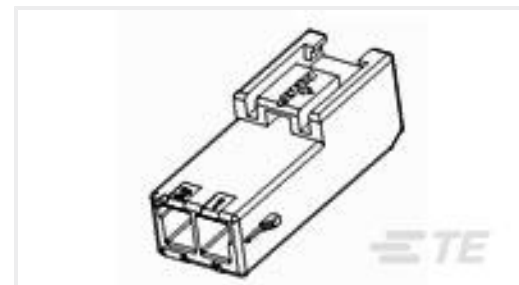

TE Part #2005248-4  
PDL 2P CAP 3.96 F/H(GWT) YEL

## Documents

### Product Drawings

[PDL 2P PLUG 3.96\(GWT\) YEL](#)

English

### CAD Files

[3D PDF](#)

3D

Customer View Model

[ENG\\_CVM\\_CVM\\_2005247-4\\_B.2d\\_dxf.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_2005247-4\\_B.3d\\_igs.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_2005247-4\\_B.3d\\_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.



---

**Product Specifications**

[Application Specification](#)

English

---

**Agency Approvals**

[UL Report](#)

English