

2320933-4 ✓ ACTIVE

AMP | AMPSEAL 16


TE Internal #: 2320933-4

3 Position Housing, Housing for Female Terminals, Wire-to-Wire,
4.5 mm [.177 in] Centerline, Sealable, Gray, Wire & Cable,
AMPSEAL 16

[View on TE.com >](#)



Connectors > Automotive Connectors > Automotive Housings > AMPSEAL 16 Housings

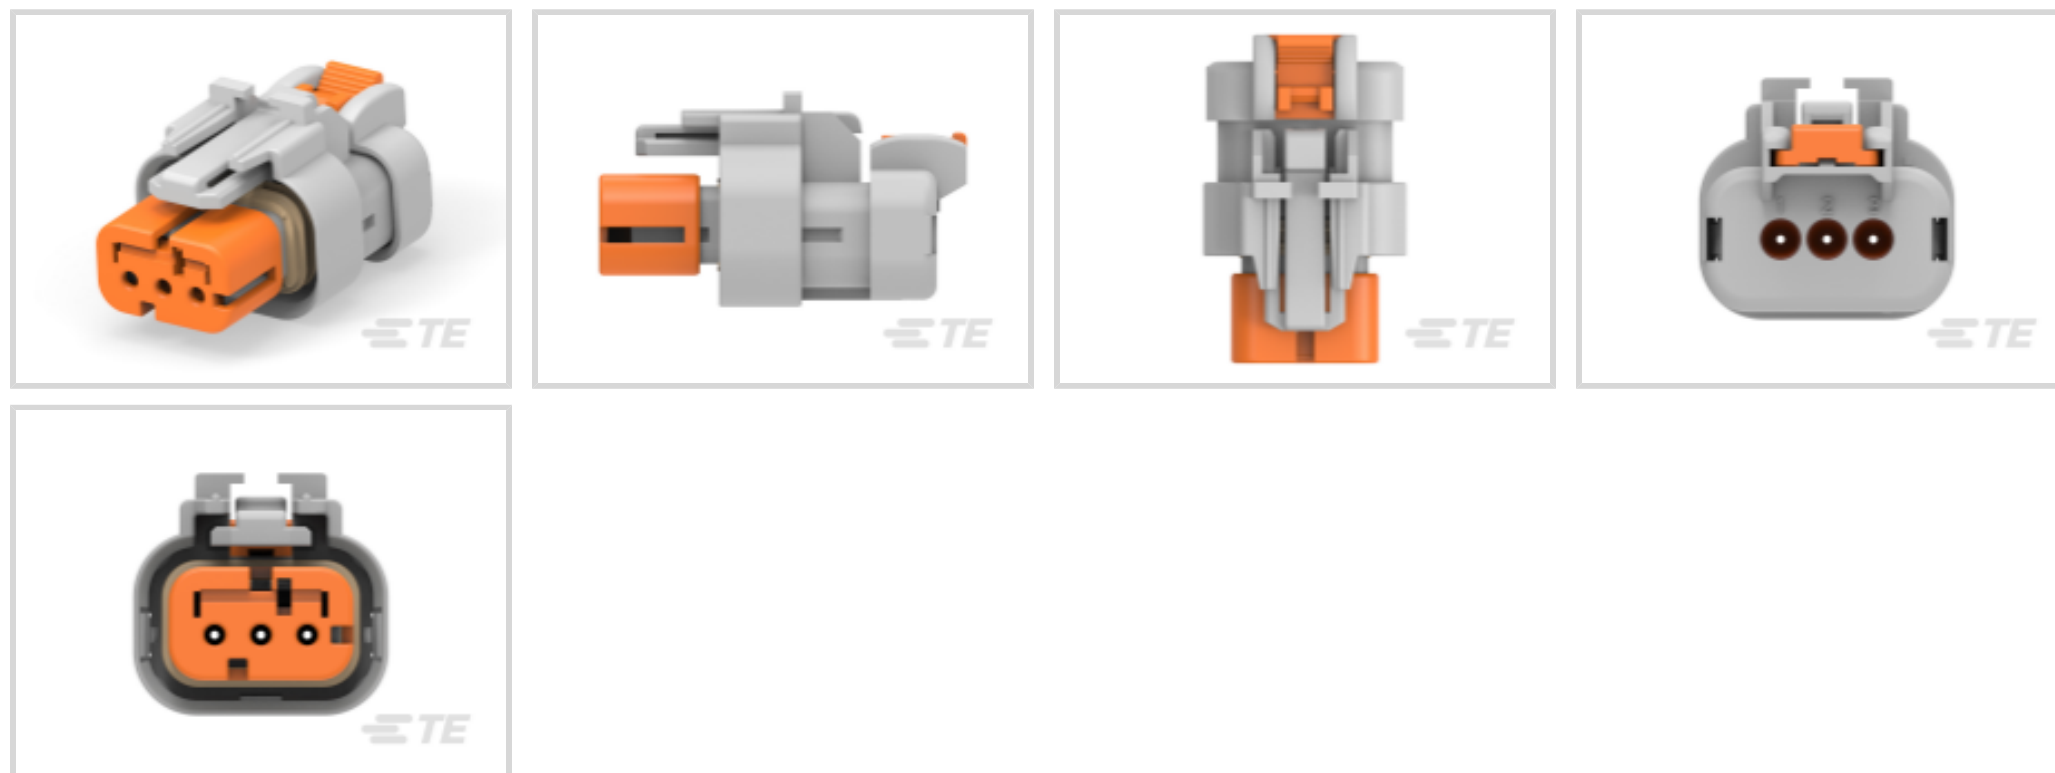

Number of Positions: 3

Connector & Housing Type: **Housing for Female Terminals**

Mating Pin Diameter: 1.6 mm [.062 in]

Connector System: **Wire-to-Wire**

Centerline (Pitch): 4.5 mm [.177 in]

[All AMPSEAL 16 Housings \(224\)](#)

Features

Electrical Characteristics

Operating Voltage	250 VDC
-------------------	---------

Industry Standards

IP Rating	IP67
UL Flammability Rating	UL 94V-0

Dimensions

Product Width	24.83 mm[.978 in]
Product Length	36.8 mm[1.449 in]
Connector Height	23.5 mm[.925 in]

Packaging Features

Packaging Method	Tube
------------------	------

Mechanical Attachment

Strain Relief	Add By Accessory
---------------	------------------



Terminal Position Assurance	Yes
Mating Alignment Type	Keyed
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)

Other

Serviceable	Yes
Connector Position Assurance Capable	Yes
EU RoHS Compliance	Compliant
EU ELV Compliance	Compliant

Body Features

Cable Exit Angle	180°
Primary Product Color	Gray
Connector & Keying Code	D

Housing Features

Housing Material	PBT GF
Centerline (Pitch)	4.5 mm [.177 in]

Contact Features

Contact Size	1.6mm
Contact Type	Socket
Mating Pin Diameter	1.6 mm [.062 in]

Product Type Features

Mixed & Hybrid Connector	No
Connector Shape	Rectangular
Connector & Housing Type	Housing for Female Terminals
Connector System	Wire-to-Wire
Sealable	Yes
Primary Locking Feature	Integrated in Housing
Connector & Contact Terminates To	Wire & Cable

Configuration Features

Blank Cavity Position	0
Number of Positions	3
Number of Rows	1



Usage Conditions

Operating Temperature (Max)	150 °C[302 °F]
Operating Temperature Range	-40 – 150 °C[-40 – 302 °F]

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	<p>Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) SVHC > Threshold: Octamethylcyclotetrasiloxane (D4) (.5% in Component Part) Dodecamethylcyclohexasiloxane (D6) (.5% in Component Part) Decamethylcyclopentasiloxane (D5) (.5% in Component Part)</p> <p>Article Safe Usage Statements: Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.</p>
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 2272179-2
AMPSEAL 16 PERIPHERAL SEAL 3P - SERVICE



TE Part # CAT-AM7801-T273
AMPSEAL 16 CONTACTS



TE Part # 776363-1
SEALING PLUG, SZ 16 CAVITY




TE Part # CAT-AM7801-CH8172
AMPSEAL 16 Housings



TE Part # CAT-AM7801-T618
Removal Tools — AMPSEAL 16

Also in the Series | **AMPSEAL 16**

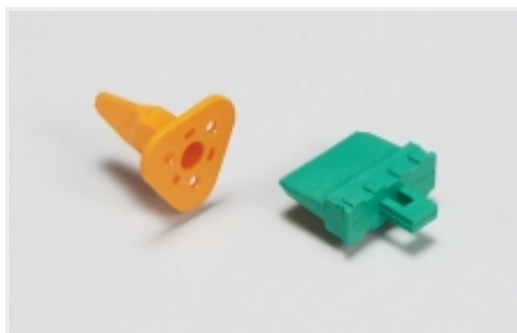

Automotive Connector Locks & Position Assurance(6)




Automotive Housings(239)



Connector Backshells(84)



Connector Seals & Cavity Plugs(10)

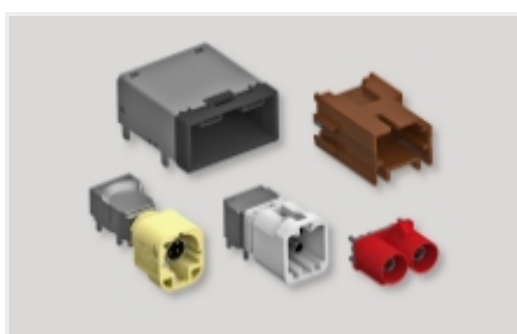

Data Connectivity Headers(2)




Other Automotive Connector Accessories(8)



Rectangular Backshells & Clamps(74)

Customers Also Bought

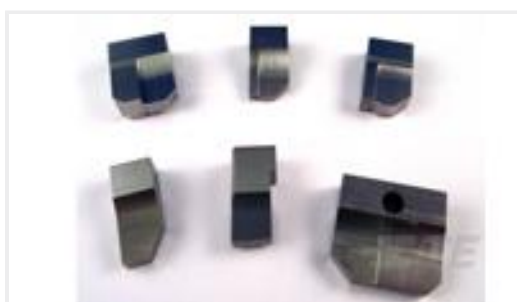


TE Part #464291-5
ANVIL, SAND-BLASTED 12-10



TE Part #788189-2
CPC 17-3 RCPT ASY, REV SEX



TE Part #1-1633961-2
CRIMPER, INSULATION F PREMIUM

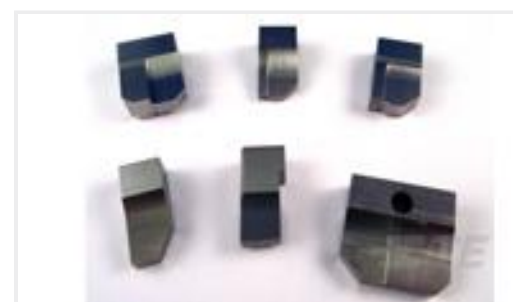

TE Part #4-1633932-0
ANVIL, COMBINATION



TE Part #2-330648-1
PIDG 22-16 22-18 MIL R 4; TAPE



TE Part #YHV280-2PM-P-4MM-B
HVA280-2phm,pass,4sqmm,Key B



TE Part #2177090-3
STEEL,OUTER FERRULE,8MM HV,
25SQMM



TE Part #1587940-3
CABLE SEAL RETAINER, SIZE C



TE Part #2103013-3
CABLE SEAL RETAINER, SIZE 2, OR,
HVA280



TE Part #2208669-3
8MM HV, CONTACT,ASSY

Documents

Product Drawings

[AS16,PLUG ASSY,HT,03P,E SEAL,CODE D](#)

English

CAD Files

[3D PDF](#)

3D

Customer View Model

[ENG_CVM_CVM_2320933-4_A.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_2320933-4_A.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_2320933-4_A.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

[Application Specification](#)

English